# PRODUCT INFORMATION PACKET



Model No: 254TTFCD6078 Catalog No: GT1217A lobetrotter® General Purpose Motor, 7.50 & 5 HP, 3 Ph, 60

Globetrotter® General Purpose Motor, 7.50 & 5 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V,  $\frac{1}{2}$ 

1200 & 1000 RPM, 254TC Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2024 Regal Rexnord Corporation, All Rights Reserved. MC017097E






## Nameplate Specifications


Phase	3	Output HP	7.50 & 5 Hp
Output KW	5.6 & 3.7 kW	Voltage	230/460 & 190/380 V
Speed	1182 & 985 rpm	Service Factor	1.15 & 1.15
Frame	254TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	91 & 90.2 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	19.8/9.9 & 17/8.5 A	Power Factor	78.5
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	н
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6209
UL	Listed	CSA	Υ
CE	Υ	IP Code	55
Number of Speeds	1	Hazardous Location	DIVISION 2 T2B

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	1.366 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Overall Length	24.65 in
Frame Length	10.00 in	Shaft Diameter	1.626 in
Shaft Extension	4 in	Assembly/Box Mounting	F1/F2 CAPABLE
Inverter Load	CONSTANT 10:1/VARIABLE 10:1		
Outline Drawing	SS620700-100	Connection Drawing	EE7308K

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/18/2024

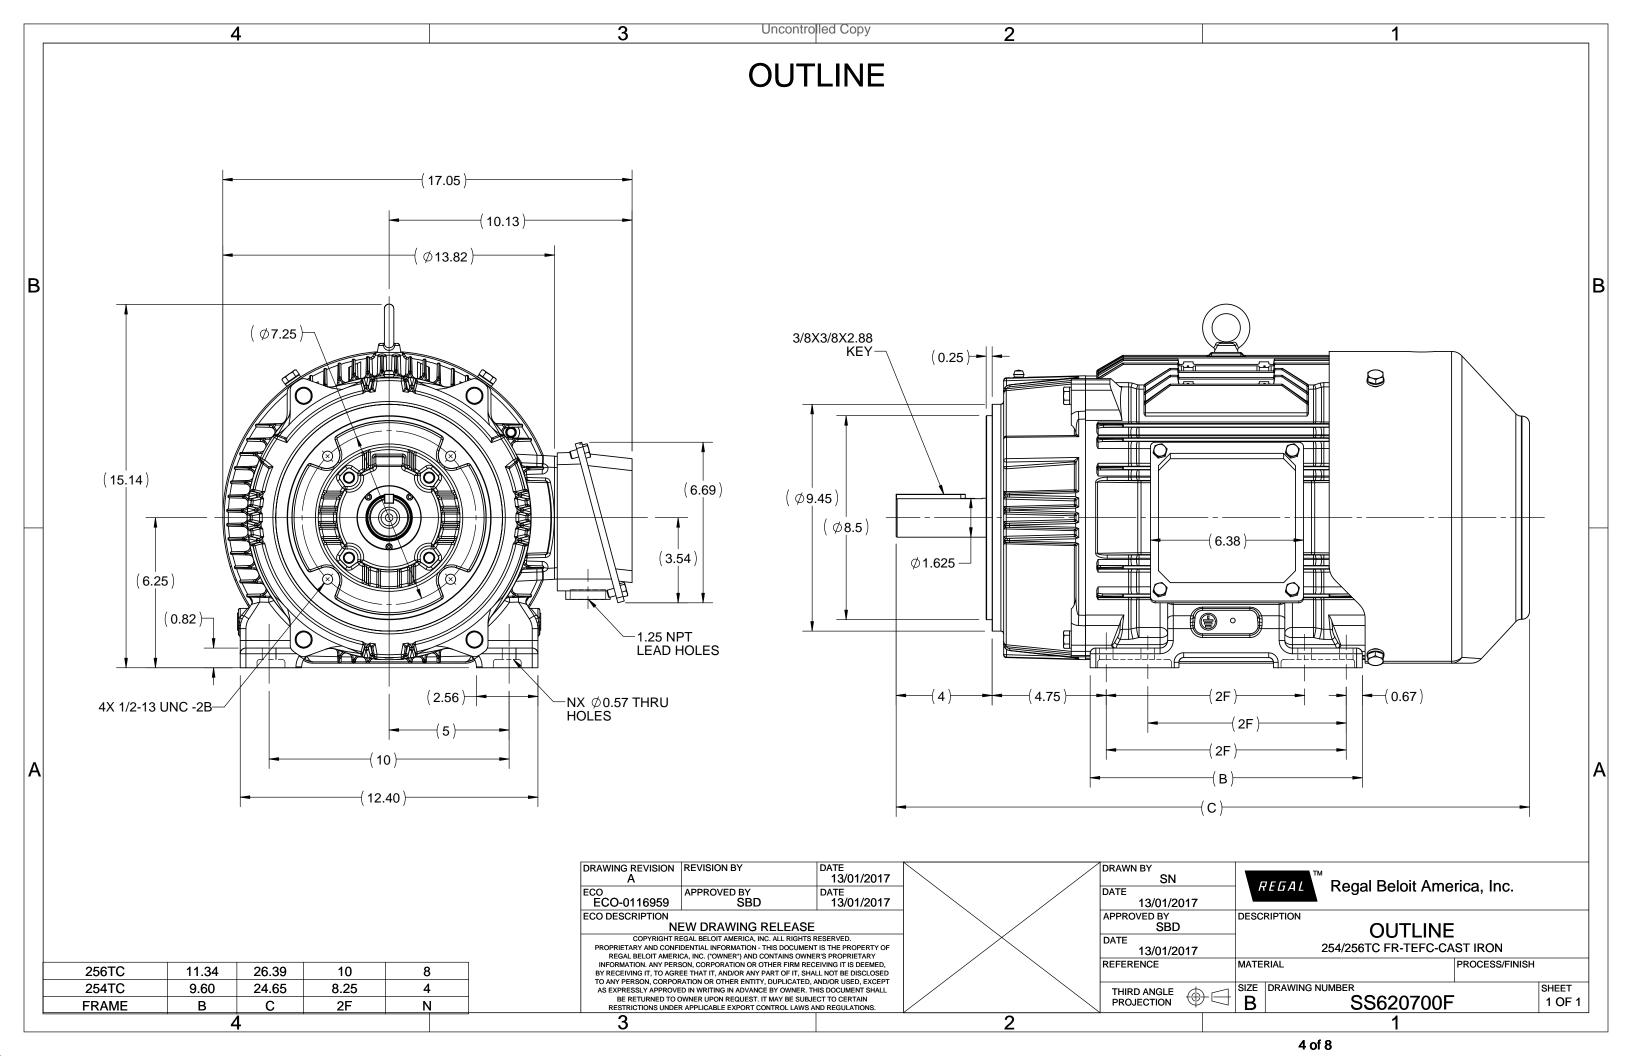

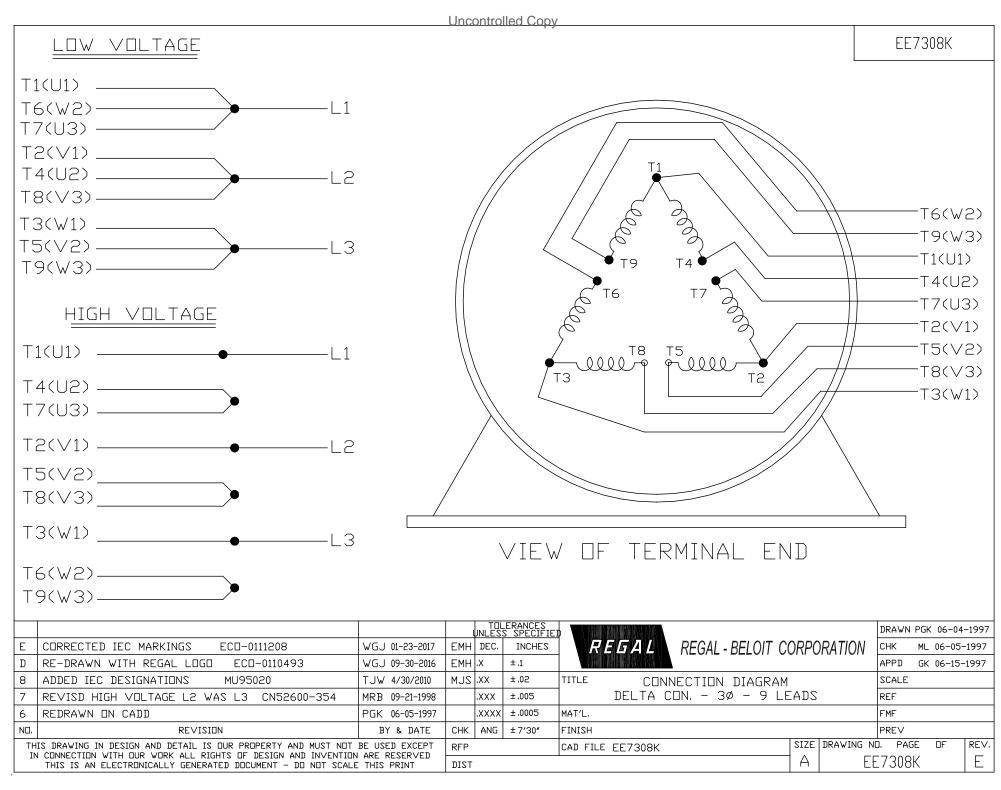



P.O. BOX 8003 WAUSAU, WI 54401-8003 PH. 715-675-3311

AA

CERTIFICATION DATA SHEET
CUSTOMER PO#:

CUSTOMER: CUSTOMER PO#:
ORDER #: MODEL #: 254TTFCD6078

CUSTOMER PART

CONN. DIAGRAM: EE7308K

OUTLINE: SS620700 WINDING #: HE31606007 2

MOUNTING: F1/F2 CAPABLE

#### **TYPICAL MOTOR PERFORMANCE DATA**

НР	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
7 1/2&5	5.60&3.70	1200	1182&985	254TC	TEFC	Н	В

L	РН	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	<b>AMB°C</b>
	3	60/50	230/460&190/380	19.8/9.9&17/8.5	LINE OR INVERTER	CONTINUOUS	F7	1.15/1.15	40

FULL LOAD EFF:	91&90.2	3/4 LOAD EFF:	91	1/2 LOAD EFF:	89.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	78.5&74	3/4 LOAD PF:	72	1/2 LOAD PF:	60	90.2	SQ CAGE INV RATED

F.L. TORQUE	LOCKED ROTOR AMPS		L.R. TORQ	UE		B.D. TOR	QUE	F.L. RISE°C
33.4 <b>LB-FT</b>	120 / 60	65	LB-FT	195 %	89	LB-FT	266 %	40

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
56 <b>dba</b>	66 <b>dba</b>	2.3 <b>LB-FT^2</b>	150 LB-FT^2	20 <b>SEC.</b>	2	325 <b>LBS.</b>

#### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	DIVISION 2 T2B	FALSE	NONE	BLUE (ENAMEL)

BEAR	RINGS	CDEACE	CHAFT TYPE	CDECTAL DE	CDECTAL ODE	SHAFT	FRAME	
DE	ODE	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL	POLYREX EM	т	NONE	NONE	1045 HOT BOLLED (C 204)	CAST IDON	
6309	6209	POLTREX EM	ı	NONE	NONE	1045 HOT ROLLED (C-204)	CAST IRON	

	THERMO-PROTE	CTORS	THERMISTORS CONTRO			THERMO-PROTECTORS			
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	INERMISIONS	CONTROL	SPACE HEATERS			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE <b>VOLTS</b>			

INVERTER
TORQUE: CONSTANT 20:1/VARIABLE 20:1

INV. HP SPEED RANGE: NONE

ENCODER: NONE

NONE NONE PPR

T BRAKE: NONE NONE

NONE P/N NONE
NONE NONE

NONE FT-LB NONE V NONE Hz


PREPARED BY: Fareeda Dudekula

DATE: 05/04/2018 06:37:37 AM

FORM 3531 REV.3 02/07/99

\*\* Subject to change without notice.

0

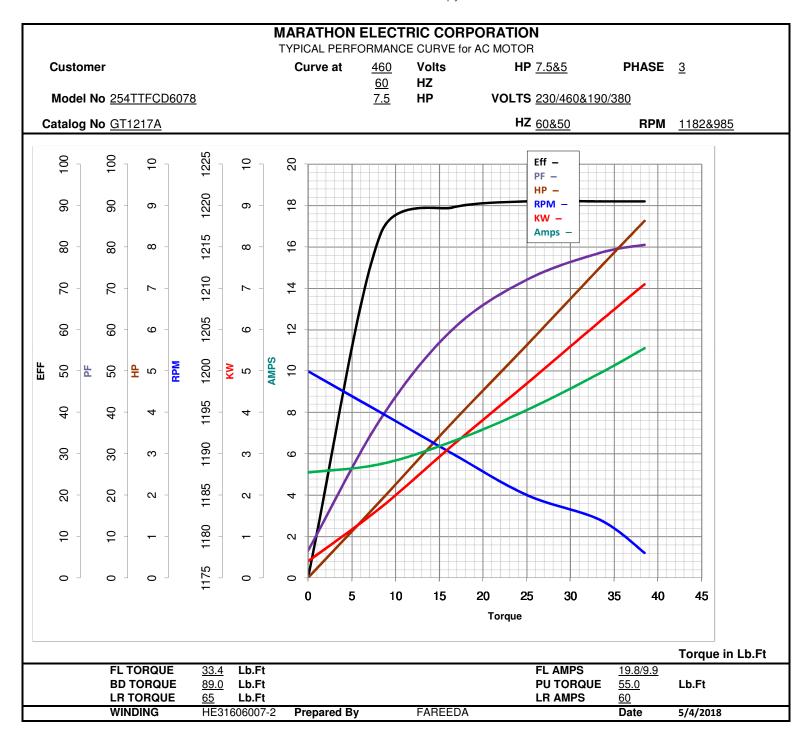



# **EC Declaration of Conformity**

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 254TTFCD6078

(Model No. may contain prefix and/or suffix characters)

Catalog No : GT1217A

Rework No: N/A

### **Directives:**

Low Voltage Directive 2014/35/EU

### Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

<u>Authorized Representative in the Community:</u>

J. cers

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

Julian Clark Marketing Engineer

(€ 22