

PRODUCT INFORMATION PACKET

marathon®
Motors

Model No: 364TSTFS6526

Catalog No: E454

60 HP Severe Duty Motor, 3 phase, 1800 RPM, 460 V, 364TS Frame, TEFC
Severe Duty Motors



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.
©2021 Regal Rexnord Corporation, All Rights Reserved. MC017097E

RegalRexnord


Nameplate Specifications

Output HP	60 Hp	Output KW	45.0 kW
Frequency	60 Hz	Voltage	460 V
Current	70.0 A	Speed	1780 rpm
Service Factor	1.15	Phase	3
Efficiency	95 %	Power Factor	85
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	G
Frame	364TS	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No	Ambient Temperature	40 °C
Drive End Bearing Size	6312	Opp Drive End Bearing Size	6312
UL	Recognized	CSA	Y
CE	Y	IP Code	54
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.101 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	TS	Overall Length	29.38 in
Frame Length	13.50 in	Shaft Diameter	1.875 in
Shaft Extension	4 in	Assembly/Box Mounting	F1/F2 Capable
Outline Drawing	B-SS508654-1350	Connection Drawing	A-EE7300U

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/12/2021

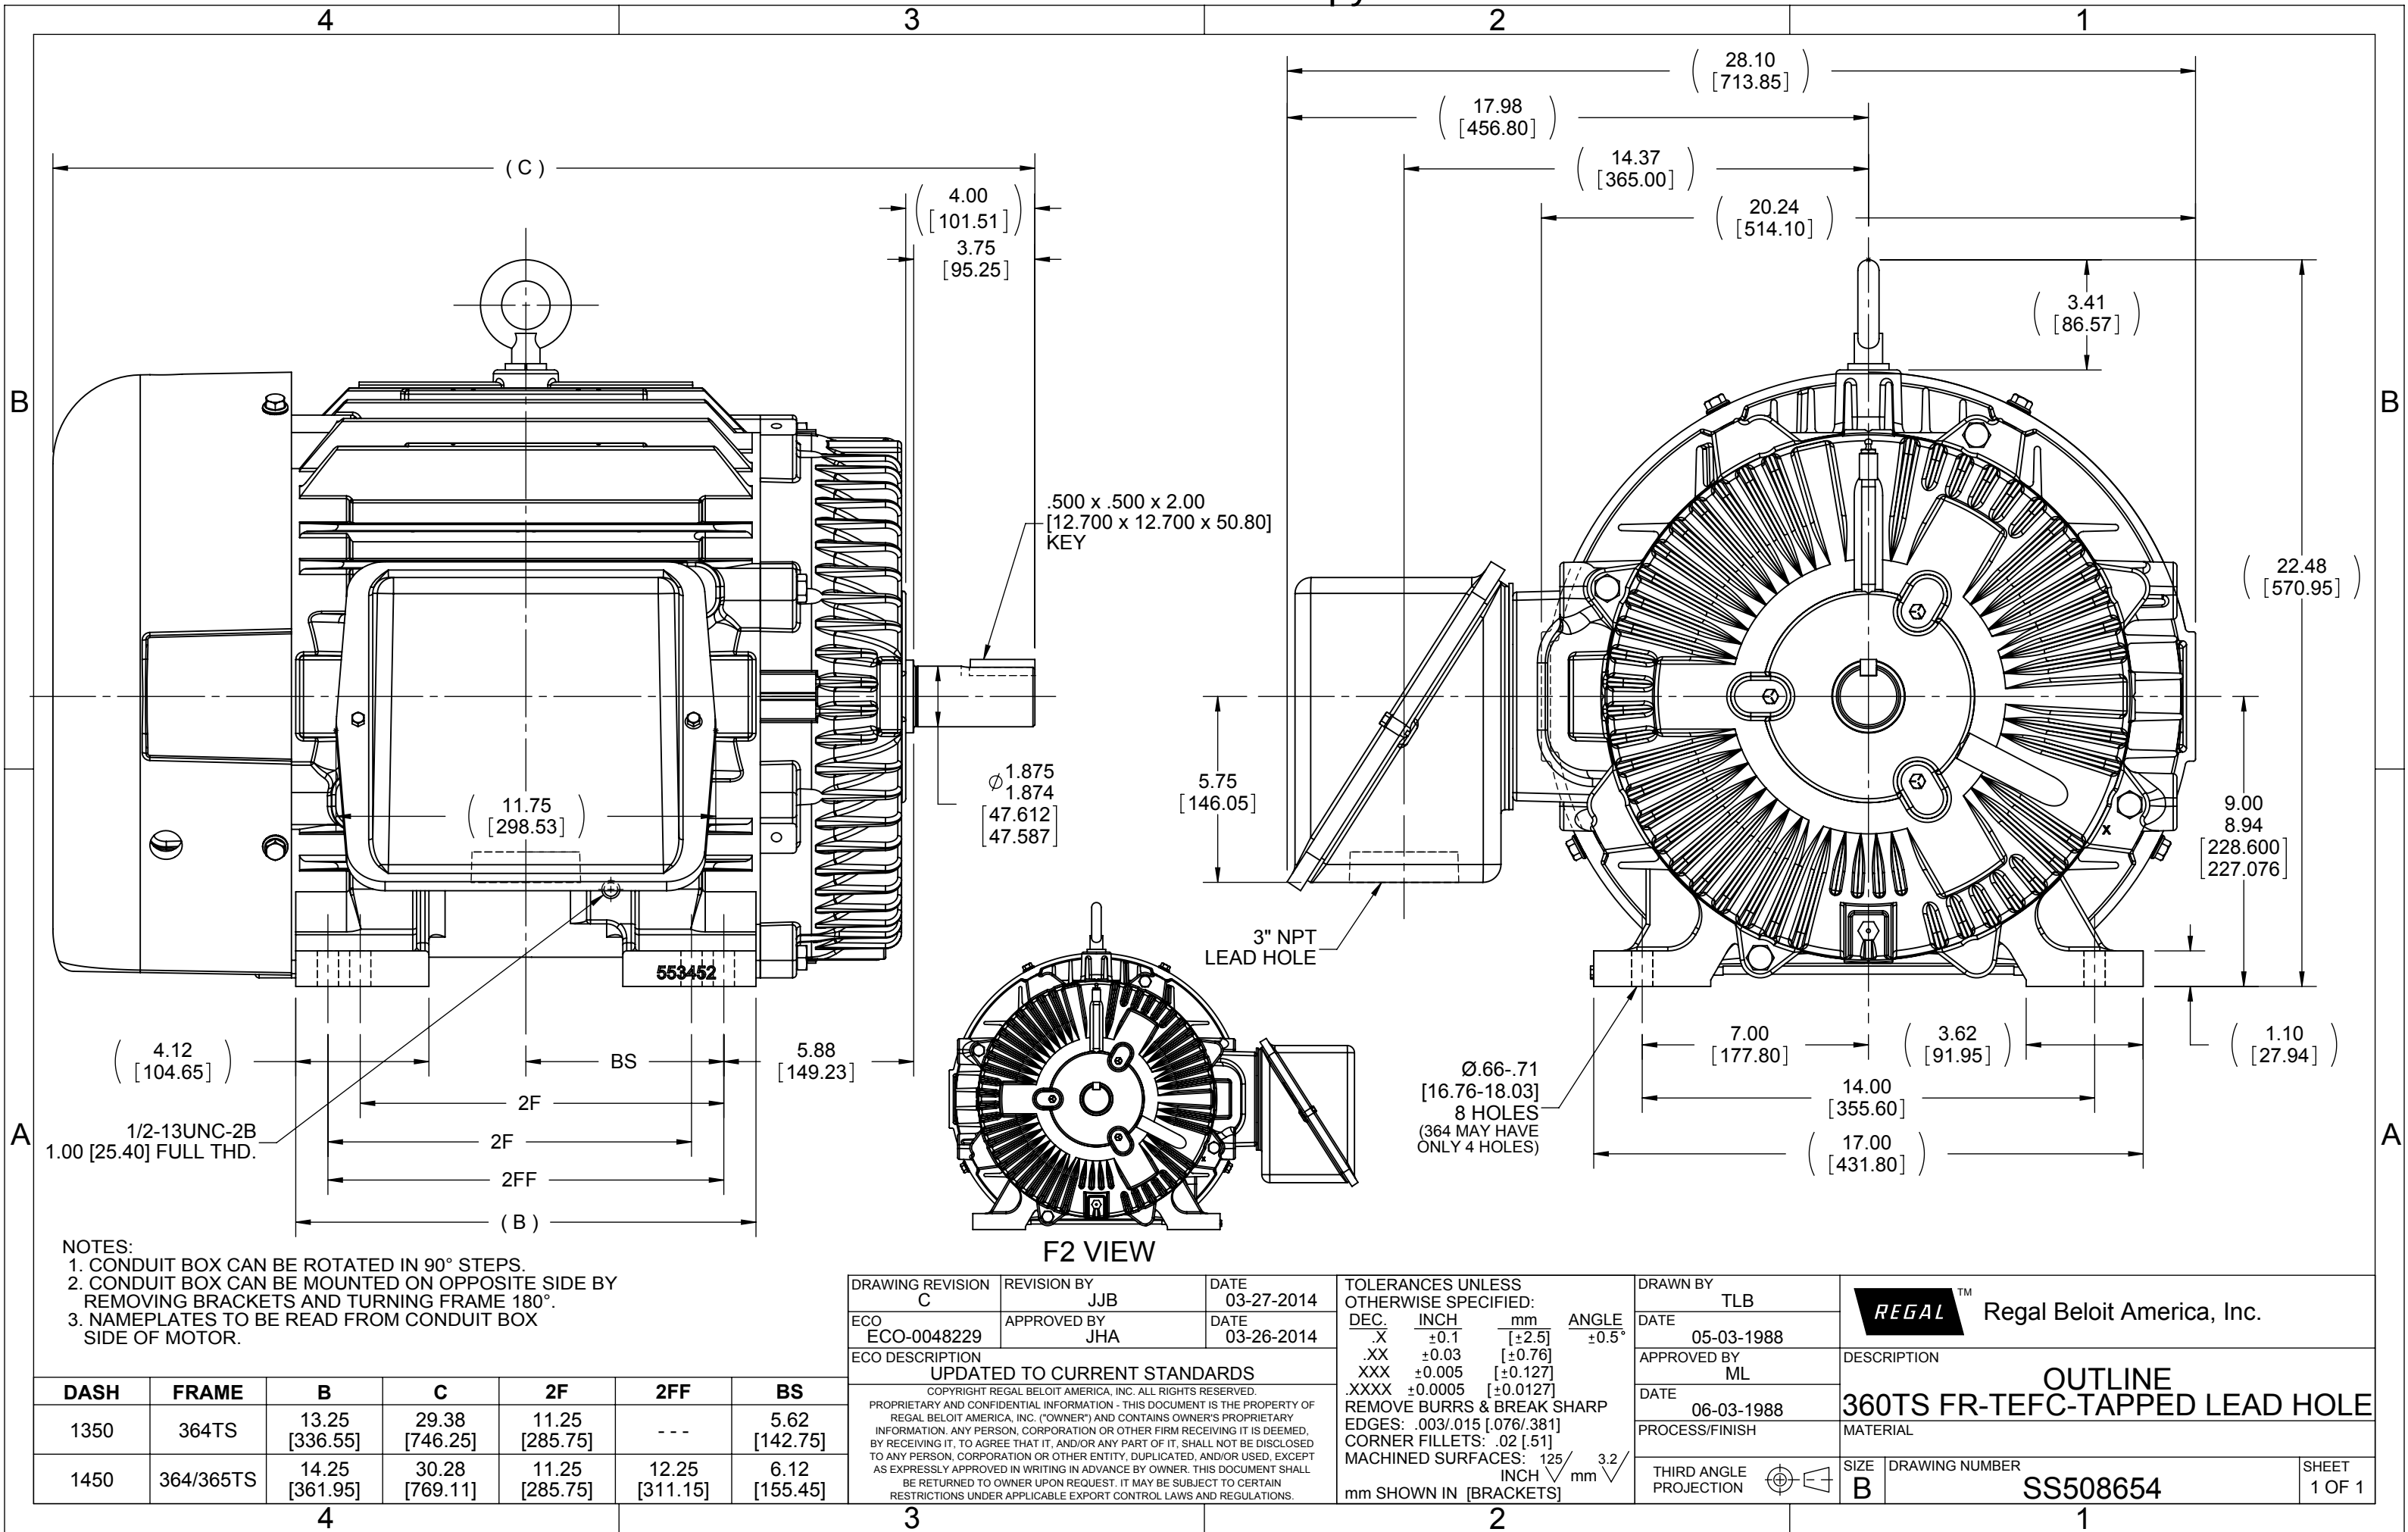

NOTES:
1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.
2. CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.
3. NAMEPLATES TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

DASH	FRAME	B	C	2F	2FF	BS
1350	364TS	13.25 [336.55]	29.38 [746.25]	11.25 [285.75]	---	5.62 [142.75]
1450	364/365TS	14.25 [361.95]	30.28 [769.11]	11.25 [285.75]	12.25 [311.15]	6.12 [155.45]


DRAWING REVISION C	REVISION BY JJB	DATE 03-27-2014
ECO ECO-0048229	APPROVED BY JHA	DATE 03-26-2014
ECO DESCRIPTION UPDATED TO CURRENT STANDARDS COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.		

TOLERANCES UNLESS OTHERWISE SPECIFIED:		
DEC.	INCH	mm
.X	±0.1	[±2.5]
.XX	±0.03	[±0.76]
.XXX	±0.005	[±0.127]
.XXXX	±0.0005	[±0.0127]
REMOVE BURRS & BREAK SHARP		
EDGES: .003/.015 [0.076/.381]		
CORNER FILLETS: .02 [0.51]		
MACHINED SURFACES: 125 INCH 3.2 mm		
mm SHOWN IN [BRACKETS]		


DRAWN BY TLB	DATE 05-03-1988
APPROVED BY ML	DATE 06-03-1988
PROCESS/FINISH	
THIRD ANGLE PROJECTION	

DRAWN BY TLB			DATE 05-03-1988		
APPROVED BY ML			DATE 06-03-1988		
PROCESS/FINISH					
THIRD ANGLE PROJECTION					
DRAWING NUMBER SS508654			SHEET 1 OF 1		

IF MOTOR HAS 9 LEADS


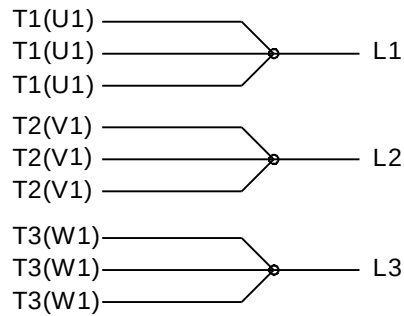


IF MOTOR HAS 6 LEADS

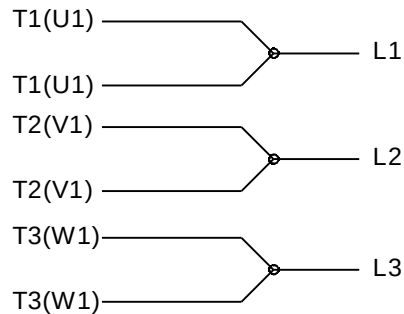

A-9806 DECAL IF CALLED FOR

IF MOTOR HAS 12 LEADS

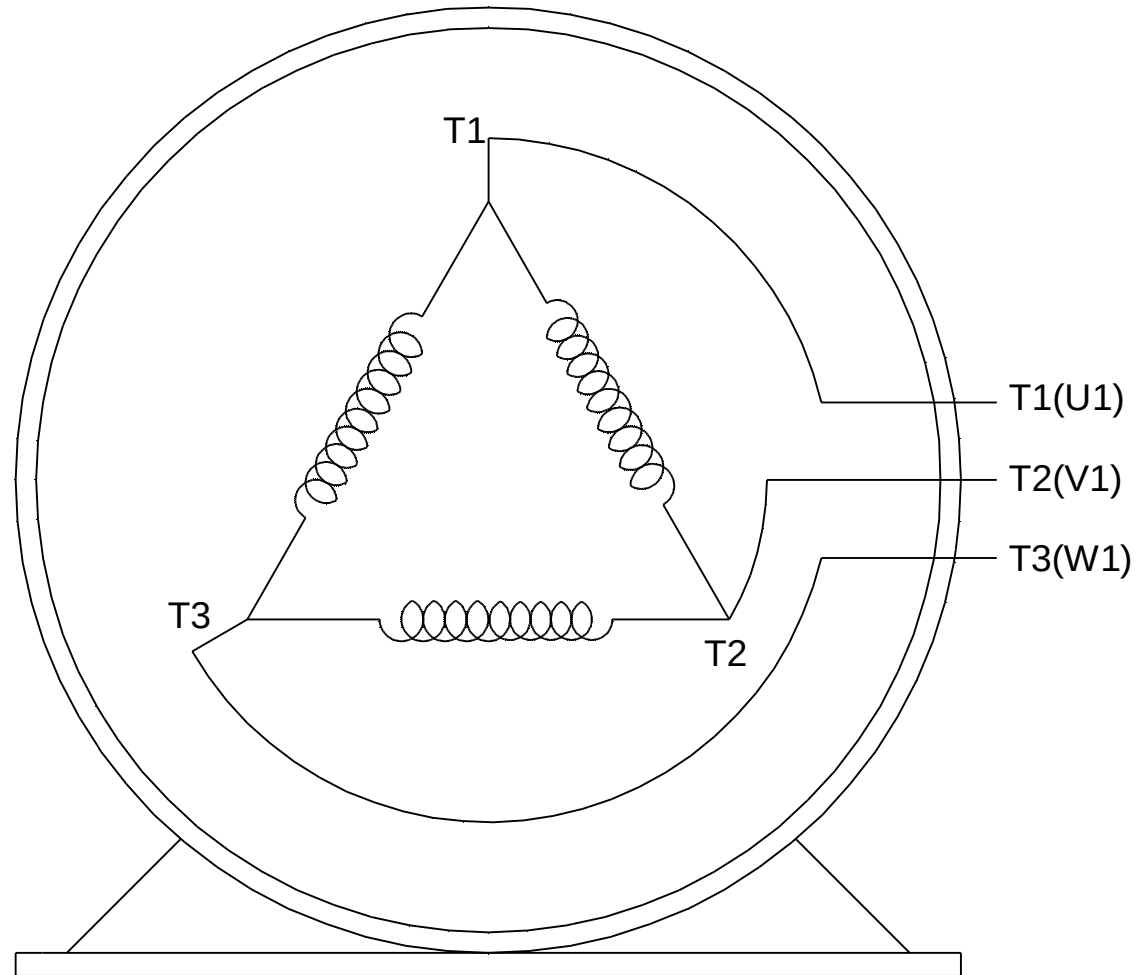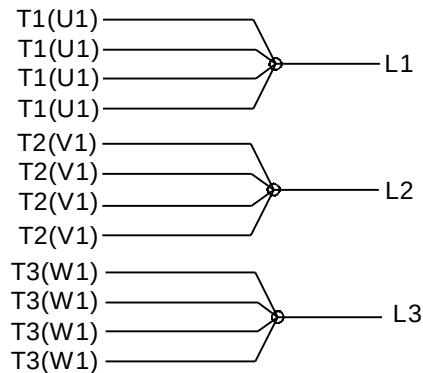

VIEW OF TERMINAL END

DRAWING REVISION L	REVISION BY AJW	DATE 05-04-2015	TOLERANCES UNLESS OTHERWISE SPECIFIED: DEC. INCH. mm ANGLE .X ±0.1 [±2.5] ±7' 30" .XX ±0.02 [±0.51] XXX ±0.005 [±0.127] .XXXX ±0.0005 [±0.0127] REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [076/381] X 45° CORNER FILLETS: R.02 [51] MACHINED SURFACES: 200 INCH 5.1 mm mm SHOWN IN [BRACKETS]		DRAWN BY DRS	REGAL™ Regal Beloit America, Inc.	
ECO ECO-0077067	APPROVED BY EWH	DATE 05-05-2015			DATE 09-27-1996	DESCRIPTION	
ECO DESCRIPTION UPDATED TO SOLIDWORKS			APPROVED BY GK		CONN DIAGRAM-EXTERNAL 3Ø SINDLE VOLTAGE		
COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED. PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED, BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.			DATE 09-30-1996	REFERENCE		MATERIAL	PROCESS/FINISH
			THIRD ANGLE PROJECTION		SIZE A	DRAWING NUMBER EE7300U	SHEET 1 OF 1

CERTIFICATION DATA SHEET

Model#: 364TSTFS6526 EU
 CONN. DIAGRAM: A-EE7300U
 OUTLINE: B-SS508654-1350

WINDING#: T3654207 NONE 1
 ASSEMBLY: F1/F2 CAPABLE

TYPICAL MOTOR PERFORMANCE DATA

HP	KW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
60	45	1800	1780	364TS	TEFC	G	B

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60	460	70	LINE OR INVERTER	CONTINUOUS	F1	1.15	40	3300

FULL LOAD EFF: 95	3/4 LOAD EFF: 95	1/2 LOAD EFF: 95	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 85	3/4 LOAD PF: 81.5	1/2 LOAD PF: 73.5	94.5	SQ CAGE INV RATED	24

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
177 LB-FT	435	335 LB-FT 189	465 LB-FT 264	75

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
65 dBA	75 dBA	15.2 LB-FT^2	420 LB-FT^2	25 SEC.	2	900 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	PREMIUM SEVERE DUTY	DIVISION 2 T2B	FALSE	NONE	BLUE (EPOXY)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT MATERIAL	FRAME MATERIAL
DE	OPE						
BALL	BALL						
6312	6312	POLYREX EM	TS	NONE	NONE	1045 HOT ROLLED (C-204)	CAST IRON

THERMO-PROTECTORS				THERMISTORS	CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

* N O T E S *	INVERTER TORQUE: CONSTANT 2:1					
	INV. HP SPEED RANGE: 1.5 X BASE SPEED					
	ENCODER: NONE					
	NONE NONE					
	NONE NONE PPR					
	BRAKE: NONE NONE					
	NONE P/N NONE					
	NONE NONE					
	NONE FT-LB		NONE V		NONE Hz	

DATE: 06/21/2017 07:51:28 AM
 FORM 3531 REV.3 02/07/99
 ** Subject to change without notice.

Data Sheet

Date: 6/20/2017

Customer: _____

Attention: _____

Submitted by: FAREEDA DUDEKULA



364TSTFS6526

Submittal

Data @ 460 V

Motor Load Data

Load	0%	25%	50%	75%	100%	115%	125%	LR	
Current (Amps)	24.0	29.0	40.0	54.0	70.0	80.0	87.0	435	
Torque (ft-lb)	0.00	44.0	88.0	133	177	204	222	335	
RPM	1800	1795	1790	1785	1780	1,775	1770	0	
Efficiency (%)		92.4	95.0	95.0	95.0	94.5	94.1		
P.F. (%)	4.0	52.0	73.5	81.5	85.0	85.5	86.0	31.0	

Motor Speed Data

	LR	Pull-Up	BD	Rated	Idle	Information Block																			
Speed (RPM)	0	900	1715	1780	1800	HP	60.0																		
Current (Amps)	435	420	300	70.0	24.0	Sync. RPM	1800																		
Torque (ft-lb)	335	300	465	177	0.00	Frame	364																		
— Efficiency (%) — P.F. (%) — Current (Amps) EFFICIENCY (%) P.F. (%) CURRENT (AMPS) <table><tr><td colspan="5">EQUIV CKT (OHMS / PHASE)</td></tr><tr><td>R1</td><td>R2</td><td>X1</td><td>X2</td><td>Xm</td></tr><tr><td>0.0650</td><td>0.0470</td><td>0.4120</td><td>0.4730</td><td>11.4470</td></tr></table>						EQUIV CKT (OHMS / PHASE)					R1	R2	X1	X2	Xm	0.0650	0.0470	0.4120	0.4730	11.4470	Enclosure	TEFC			
						EQUIV CKT (OHMS / PHASE)																			
						R1	R2	X1	X2	Xm															
						0.0650	0.0470	0.4120	0.4730	11.4470															
						Construction	TFS																		
						Voltage	460	V																	
						Frequency	60	Hz																	
						Design	A																		
						LR Code letter	G																		
						Service Factor	1.15																		
						Temp Rise @ FL	80	° C																	
						Duty	CONT																		
						Ambient	40	° C																	
						Elevation	1,000	feet																	
						Rotor/Shaft wk ²	15.2	Lb-Ft ²																	
						Ref Wdg	T3654207	NONE																	
						Sound Pressure @ 1M	65	dBA																	
VFD Rating	CONSTANT 2:1																								
Outline Dwg	B-SS508654-1350																								
Conn. Diag	A-EE7300U																								
Additional Specifications:																									
0																									
0																									

 Enclosure | TEFC | | | || Construction | TFS | | | |
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL	80	° C			
Duty	CONT				
Ambient	40	° C			
Elevation	1,000	feet			
Rotor/Shaft wk²	15.2	Lb-Ft²			
Ref Wdg	T3654207	NONE			
Sound Pressure @ 1M	65	dBA			
VFD Rating	CONSTANT 2:1				
Outline Dwg	B-SS508654-1350				
Conn. Diag	A-EE7300U				
Additional Specifications:					
0					
0					
Enclosure	TEFC				
Voltage	460	V			
Frequency	60	Hz			
Design	A				
LR Code letter	G				
Service Factor	1.15				
Temp Rise @ FL					

Speed -Torque Curve

