PRODUCT INFORMATION PACKET



Model No: 365TTFS16084 Catalog No: 365TTFS16084 50,1200,TEFC,365TZ,3/60/460






Nameplate Specifications

Phase	3	Output HP	50 Hp
Output KW	37.0 kW	Voltage	460 V
Speed	1182 rpm	Service Factor	1.15
Frame	365T	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	94.1 %
Ambient Temperature	40 °C	Frequency	60 Hz
Current	62.0 A	Power Factor	80.5
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6314	Opp Drive End Bearing Size	6313
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		
	·		


Technical Specifications


Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	6	Rotation	Reversible
Resistance Main	.12 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	T Both Sides	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	B-SS515889-1450	Connection Drawing	A-EE7300U

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:08/24/2023

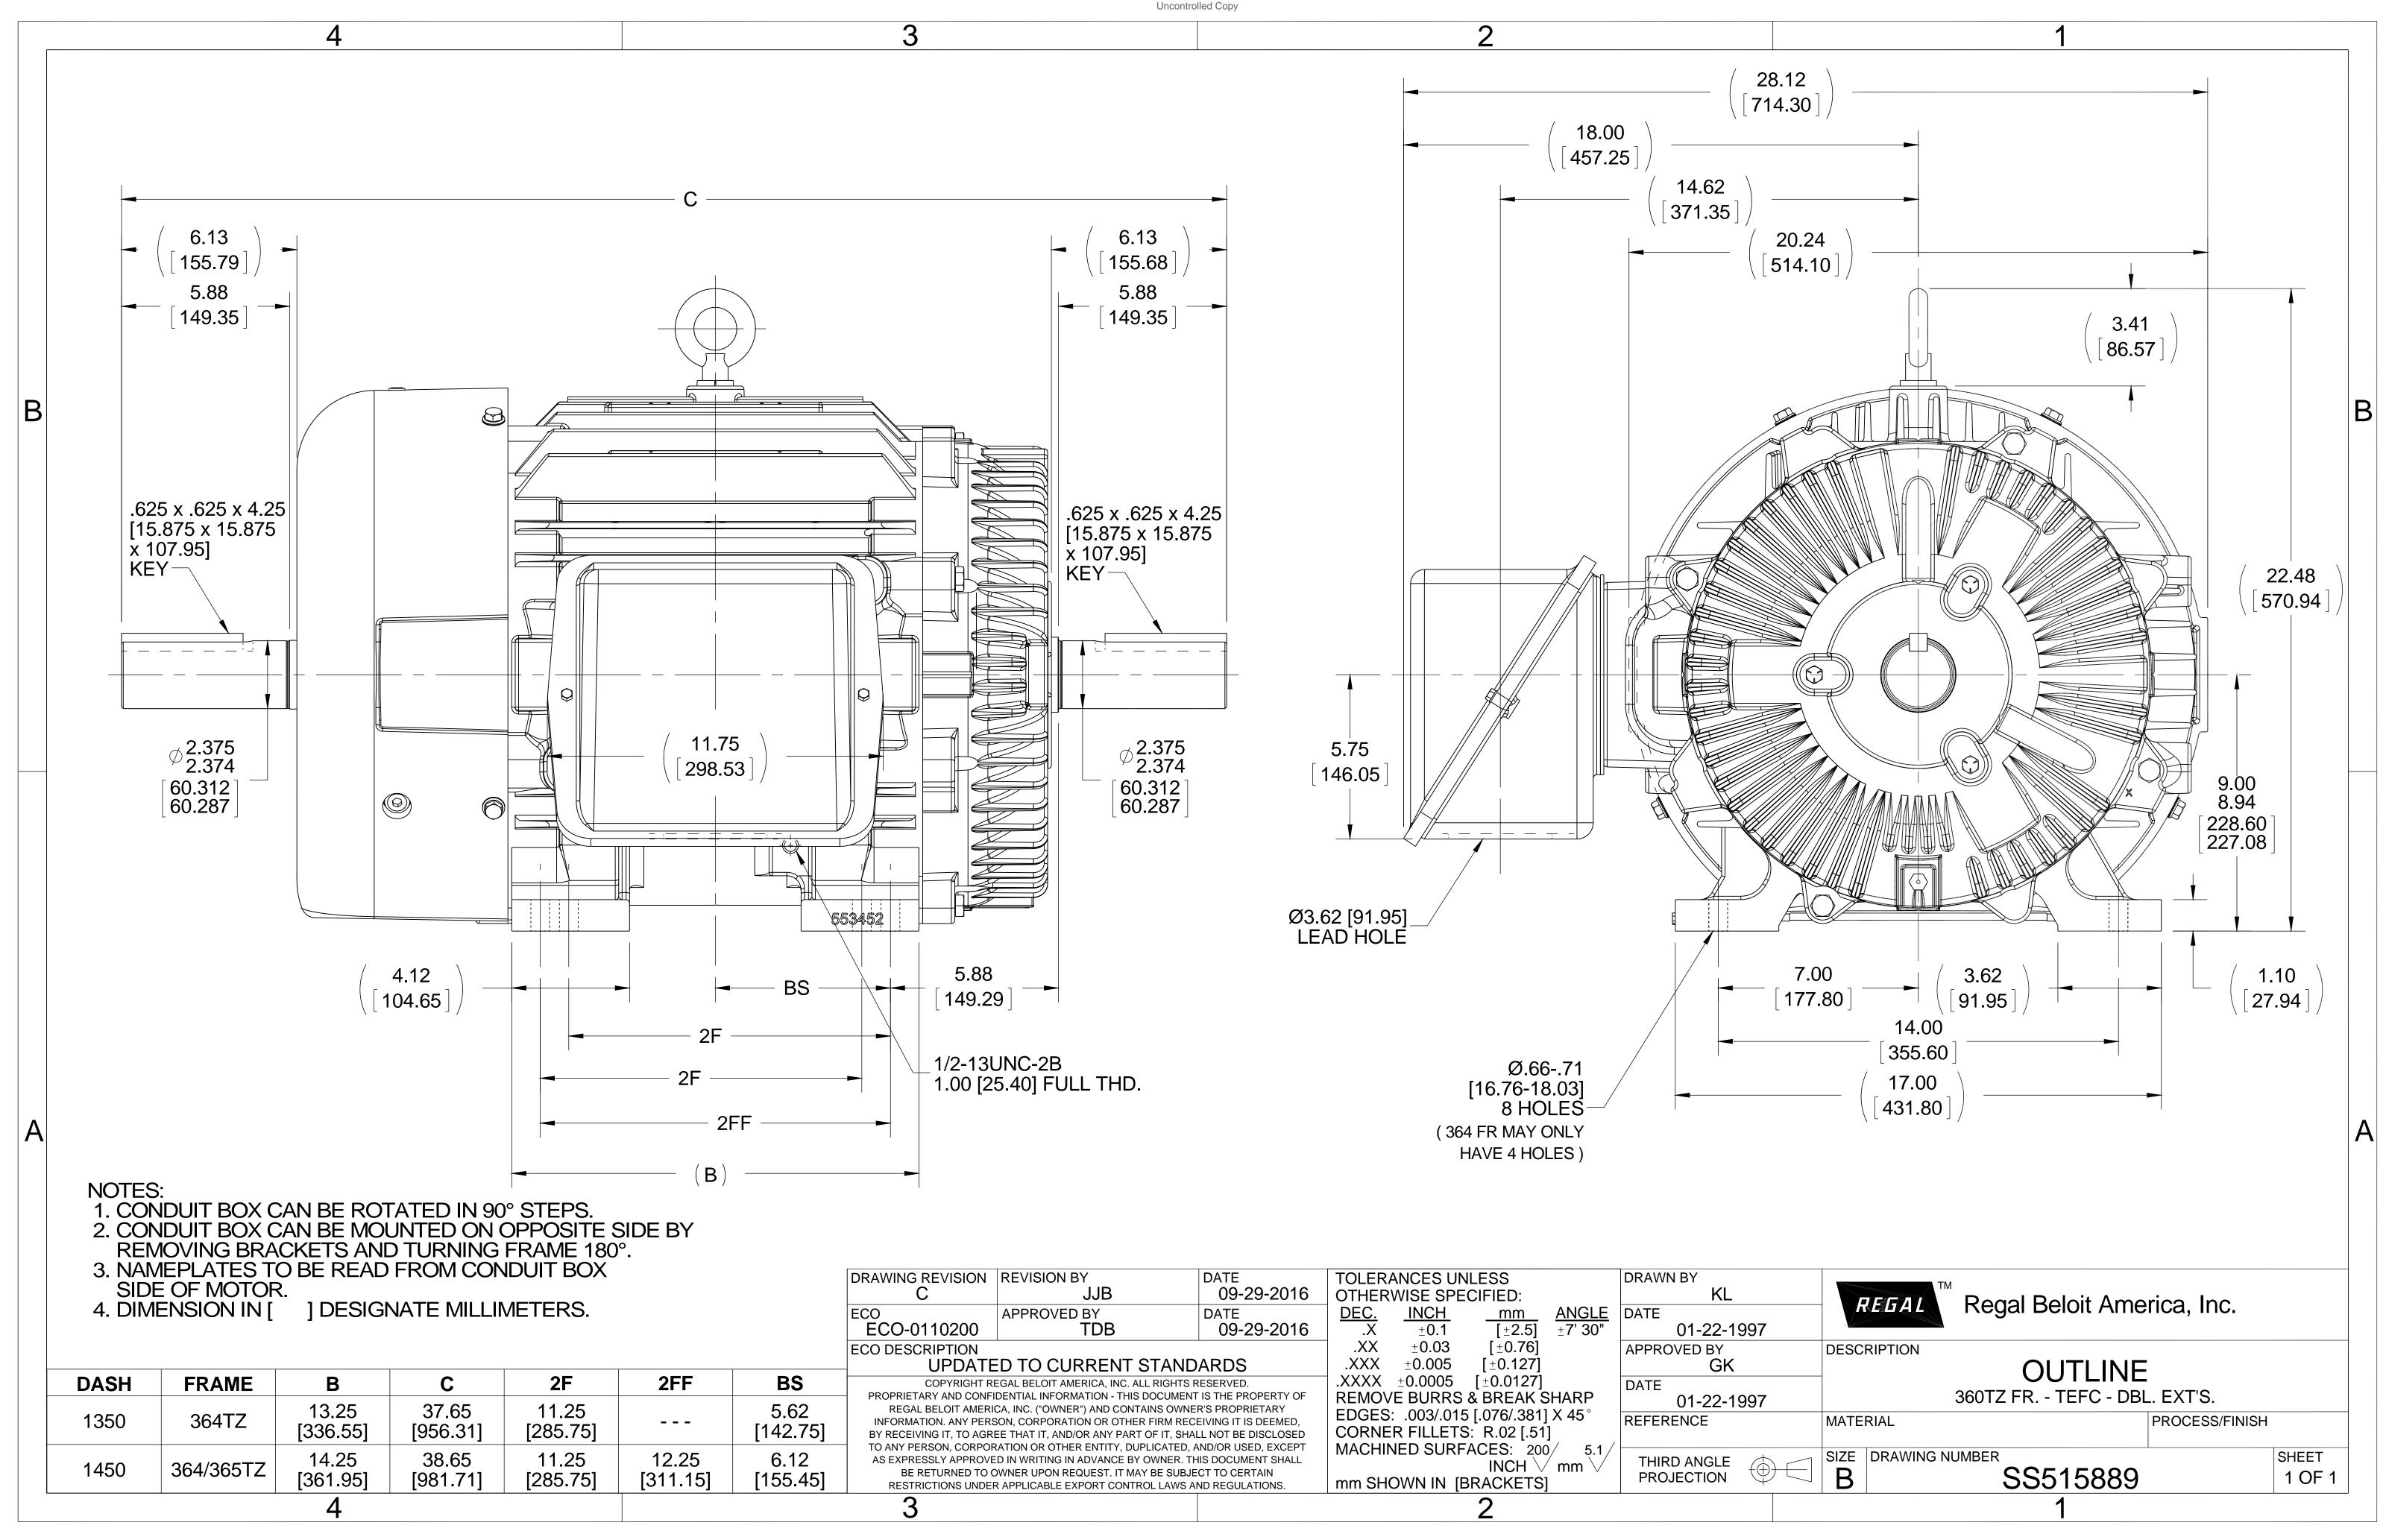

Uncontrolled Copy

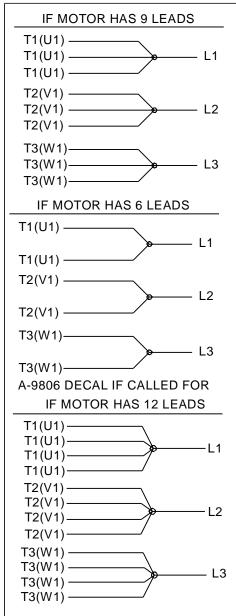

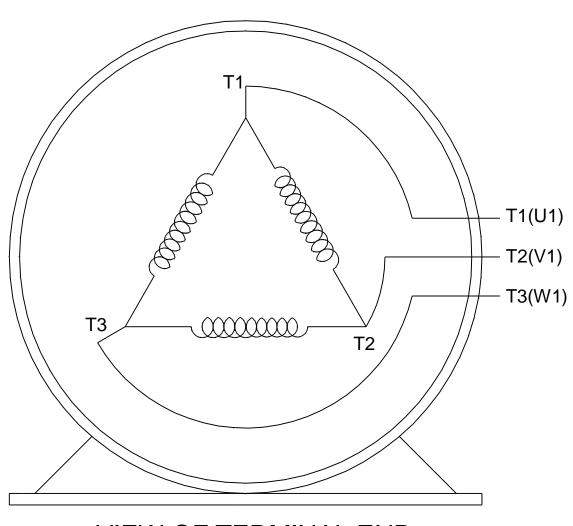

VIEW OF TERMINAL END

DRAWING REVISION	REVISION BY	DATE	
L	AJW	05-04-2015	
ECO	APPROVED BY	DATE	
ECO-0077067	EWH	05-05-2015	
ECO DESCRIPTION			

UPDATED TO SOLIDWORKS

COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED.
PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF
REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY
INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED,
BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED
TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT
AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL
BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN
RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS.

TOLER.	ANCES UN	ILESS	
OTHER	WISE SPE	CIFIED:	
DEC.	<u>INCH</u>	<u>mm</u>	<u>ANGLE</u>
.X	±0.1	[±2.5]	±7' 30"
.XX		[±0.51]	
		[±0.127]	
		[±0.0127]	
REMO\	/E BURRS	& BREAK S	HARP
		5 [.076/.381]	
CORNE	R FILLETS	S: R.02 [.51]
MACHI	NED SURF	ACES: 200	5.1
		INCH ∨	mm 🗸
mm SH	OWN IN [E	BRACKETS]	

	DRAWN BY DRS DATE 09-27-1996		REGAL Regal Beloit Ame	rica, Inc.	
APPROVED BY GK DESCRIPTION CONNIDIAC			CONN DIAGRAM-E	YTERNA	
DATE 09-30-1996		3Ø SINDLE VOLTAGE			
,	REFERENCE	MATE	RIAL	PROCESS/FINISH	
	THIRD ANGLE PROJECTION	SIZE	DRAWING NUMBER EE7300U		SHEET 1 OF 1