
## **PRODUCT INFORMATION PACKET**

Model No: 444TTGS4042 Catalog No: U036 Explosion Proof Motor, 125 HP, 3 Ph, 60 Hz, 575 V, 1800 RPM, 444T Frame, EPFC





Product Information Packet: Model No: 444TTGS4042, Catalog No:U036 Explosion Proof Motor, 125 HP, 3 Ph, 60 Hz, 575 V, 1800 RPM, 444T Frame, EPFC


## Nameplate Specifications


| Output HP              | 125 Нр                                    | Output KW                  | 93.0 kW                    |
|------------------------|---|----------------------------|----------------------------|
| Frequency              | 60 Hz                                     | Voltage                    | 575 V                      |
| Current                | 113.0 A                                   | Speed                      | 1780 rpm                   |
| Service Factor         | 1.15                                      | Phase                      | 3                          |
| Efficiency             | 94.5 %                                    | Power Factor               | 86                         |
| Duty                   | Continuous                                | Insulation Class           | F                          |
| Design Code            | В   | KVA Code                   | G                          |
| Frame                  | 444T                                      | Enclosure                  | Explosion Proof Fan cooled |
| Thermal Protection     | Thermostat                                | Ambient Temperature        | 40 °C                      |
| Drive End Bearing Size | 6318                                      | Opp Drive End Bearing Size | 6316                       |
| UL                     | UL Listed And CSA Certified               | CSA                        | Y                          |
| CE                     | N   | IP Code                    | 54                         |
| Hazardous Location     | EXP PROOF CL I GR C&D CL II GR F&G<br>T3B | Number of Speeds           | 1                          |

## **Technical Specifications**

| Electrical Type       | Squirrel Cage Inverter Rated | Starting Method       | Line Or Inverter |
|-----------------------|------------------------------|-----------------------|------------------|
| Poles                 | 4                            | Rotation              | Reversible       |
| Resistance Main       | .036 Ohms                    | Mounting              | Rigid Base       |
| Motor Orientation     | Horizontal                   | Drive End Bearing     | Ball             |
| Opp Drive End Bearing | Ball                         | Frame Material        | Cast Iron        |
| Shaft Type            | Т                            | Overall Length        | 41.25 in         |
| Frame Length          | 18.50 in                     | Shaft Diameter        | 3.375 in         |
| Shaft Extension       | 8.75 in                      | Assembly/Box Mounting | F1 ONLY          |
| Inverter Load         | CONSTANT 2:1                 |                       |                  |
| Outline Drawing       | B-SS518995-1850              | Connection Drawing    | A-EE7300S        |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:09/06/2022

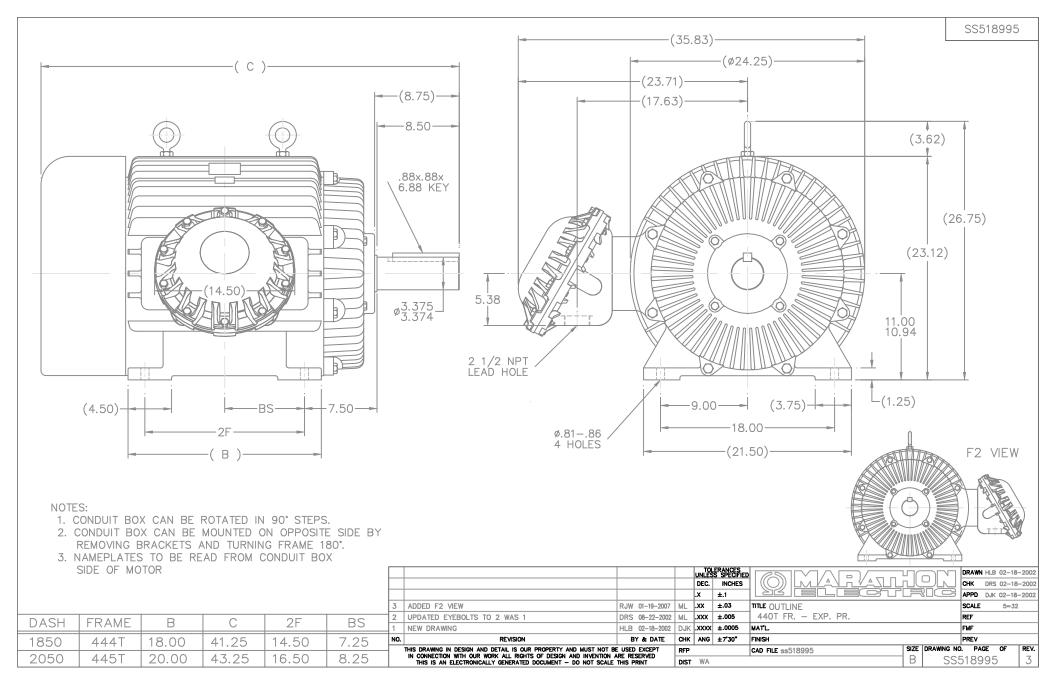

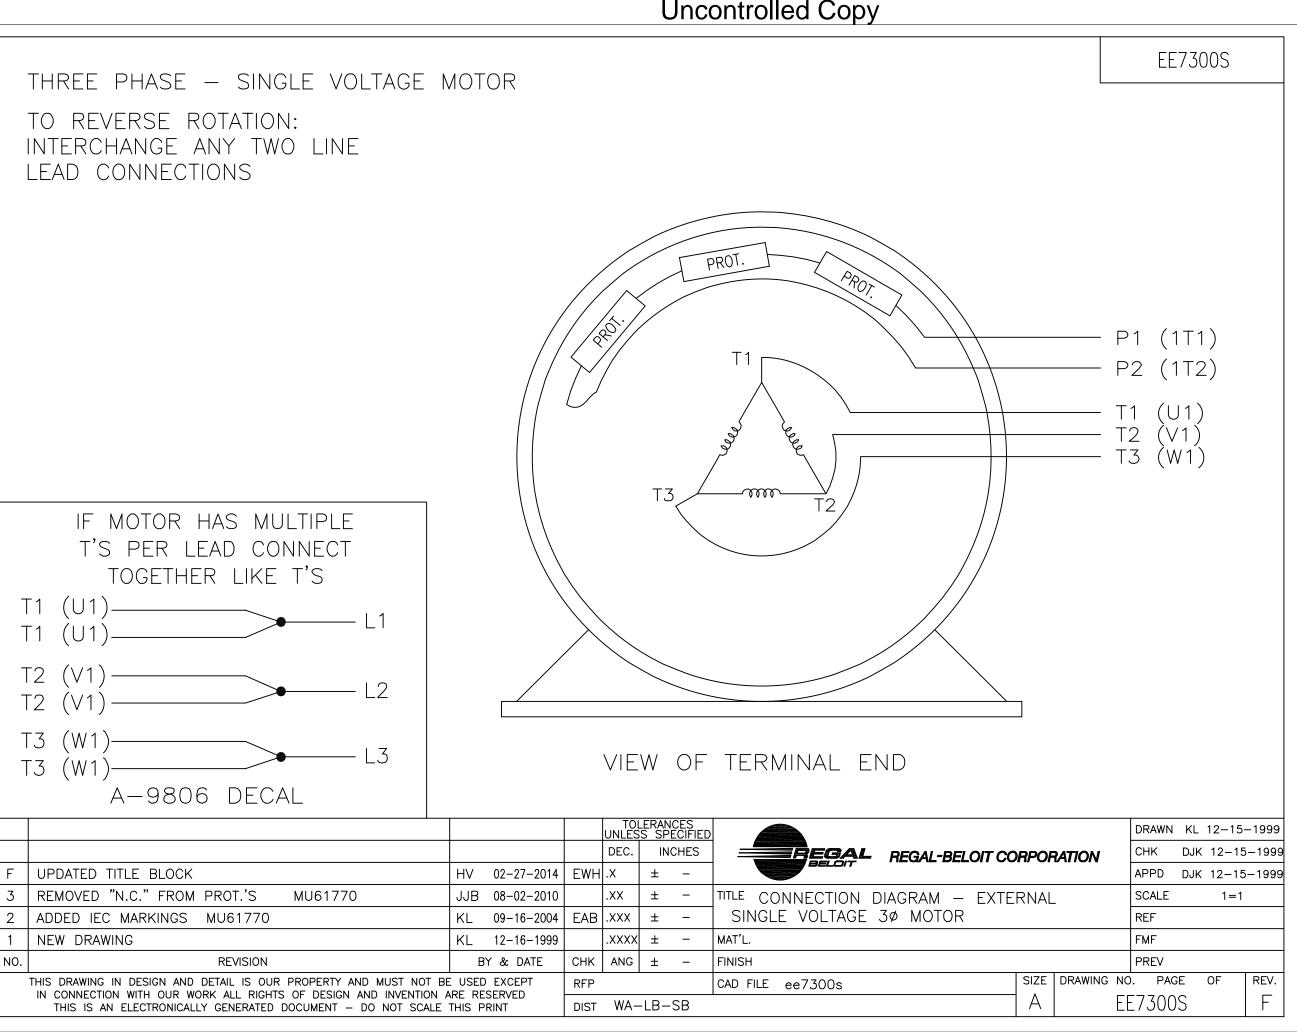

NO.