PRODUCT INFORMATION PACKET

Model No: 449THTS16601 Catalog No: 449THTS16601 175,900,TENV,449TZ,3/60/600





Product Information Packet: Model No: 449THTS16601, Catalog No:449THTS16601 175,900,TENV,449TZ,3/60/600


Nameplate Specifications

Output HP	175 Нр	Output KW	131.0 kW
Frequency	60 Hz	Voltage	600 V
Current	176.0 A	Speed	890 rpm
Service Factor	1	Phase	3
Efficiency	95 %	Power Factor	74
Duty	60 Minute	Insulation Class	Н
Design Code	INV	KVA Code	Н
Frame	447/449TZ	Enclosure	Totally Enclosed Non Ventilated
Thermal Protection	Thermostat	Ambient Temperature	40 °C
Drive End Bearing Size	6319	Opp Drive End Bearing Size	6318
UL	Recognized	CSA	Y
CE	Υ	IP Code	56
Number of Speeds	1		

Technical Specifications


Electrical Type	Squirrel Cage Inverter Duty	Starting Method	Inverter Only
Poles	8	Rotation	Reversible
Resistance Main	.018 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Special Extension Both Sides	Assembly/Box Mounting	F1/F2 CAPABLE
Connection Drawing	A-EE7300AK	Outline Drawing	B-SS554033-2875

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:09/03/2022

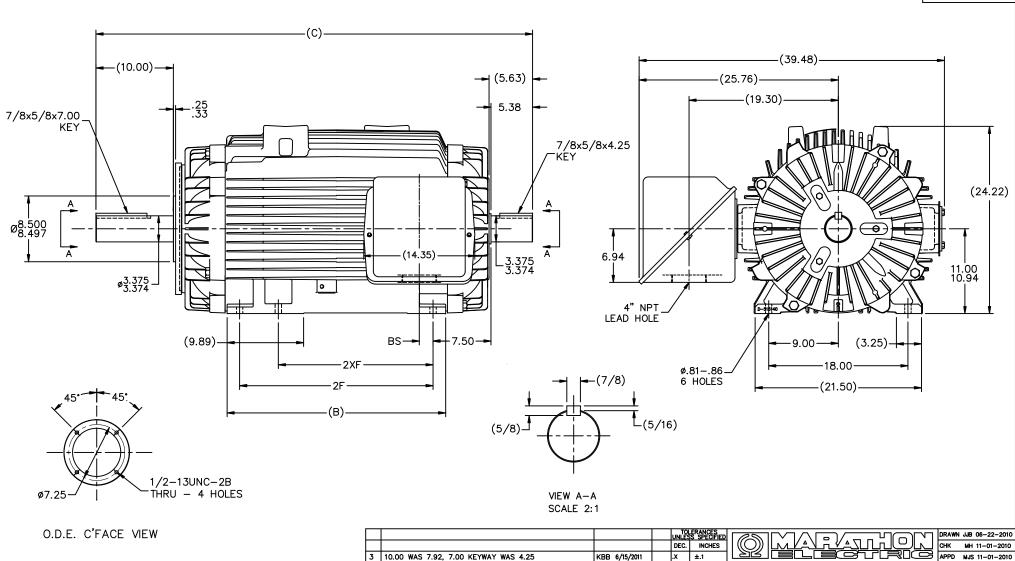

							5	10:00 WAS 7.32, 7:00 RETWAT WAS 4.25	RDD	0/10/2011							103 11-01-2010
								ISAAC 11-2542			EH	.xx	±.02	TILE OUTLINE - TENV - GROUND	RING	SCALE	1=8
		_	-	0.5			2	ODE SHAFT EXT. WAS 5.38, NOW 7.92 PER CUSTOMER	JJB	6/28/2010		.xxx	±.005	447/9TZ FR. – ENCODER PROV		REF	
DASH	I FRAME	В	С	2F	2XF	BS	1	ADDED VIEW A-A & REV'D. KEY DIMS. PER CUSTOMER	JJB	6/23/2010		.xxxx	±.0005	MAT'L.		FMF	QR00601A
2875	5 447TZ	28.25	56.20		20.00	1.78	NO.	REVISION	E	Y & DATE	СНК	ANG	±7'30"	FINISH		PREV	
20/0	, ++/12	20.25	30.20		20.00	1.70		THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE	E USEC	EXCEPT	RFP			CAD FILE SS554033	SIZE DRAWING N	PAGE	OF REV.
2875	5 449TZ	28.25	56.20	25.00		1.78		IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION A THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE			DIST	WA			B SS	55403	33 3

SS554033

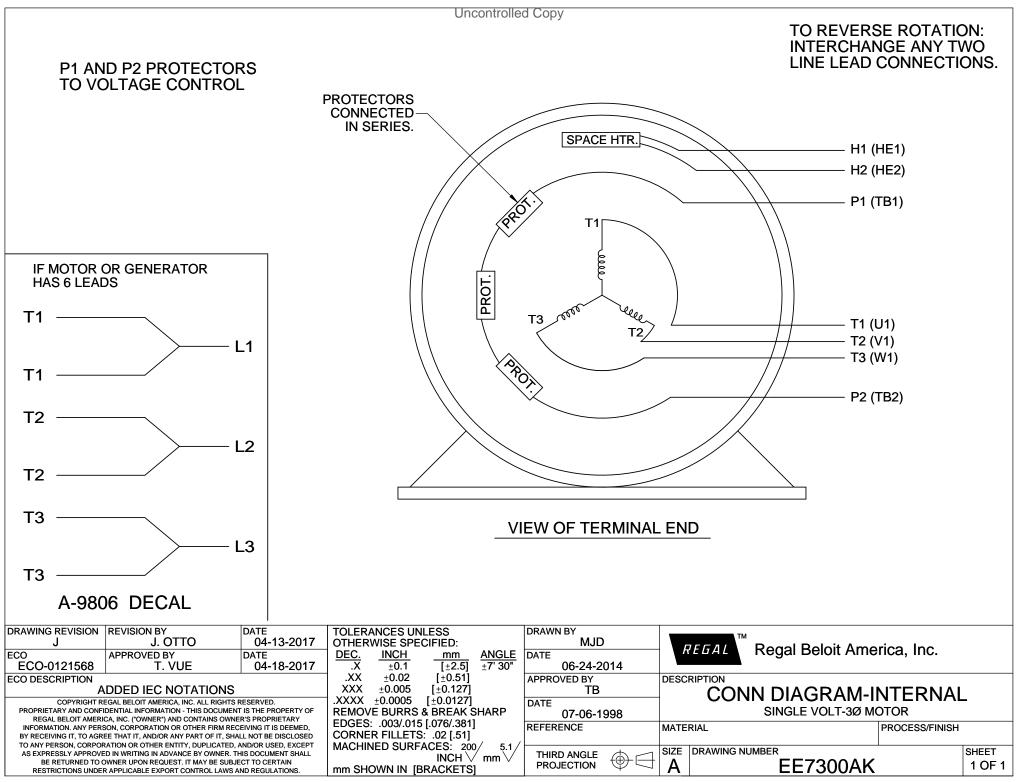

) m	electri			P.O. BOX (WAUSAU, PH. 715-6	WI 54401-8003	600	
						C	ERTIFICATION DATA SI	HEET					
сизтом									MER P.O. #:				[
ORDER #		A-EE7300/	AK				F	REFERENC	E MODEL #: CAT #:	449THTS1	6601 N/A		
OUTLINE:		B-SS5540						CUSTON	IER PART #:		N/A		
WINDING			T449848	NONE	2				MOUNTING:	F1/F2 CAP	ABLE		•
SPEED:										504205B			
							L MOTOR PERFORMA						
HP	ĸw		RPM	FL R			FRAME		LOSURE	TYPE	KVA CO	DE	DESIGN
175	131	9	00	89	0		447/449TZ	т	ENV	TTN	Н		INV
РН	HZ	٧O	LTS	AMF	PS .	1	START TYPE		UTY	INSL	S.F.	AMB	ELEV.
3	60		00	170			INVERTER ONLY) MIN	Н	1.00	40	3300
													•
	F.L. EFF	95.0		3/4 LD EFF	95.0		1/2 LD EFF		GTD EFF			T. TYPE	
	F.L. PF	74.0		3/4 LD PF	69.0		1/2 LD PF	58.0	94.5		SQ CAGE	INV DUTY	
EI T	ORQUE			460 V			R. TORQUE		B.D. TORQU	-	F.L. RISE	(° C)	
1,032		LR AMPS @ 460 1,112		400 V	1,500			2,400		233%	75	,	
.,			.,					_,					I
SOUND PRESSURE				ROTOR			MAX. LOAD WK ²	20	TALL TIME	STA	RTS/HOUR	APROX.	MOTOR
60	dBA	69	dBA	138	LB-FT ²	-	- LB-FT ²		SEC.		2	2960	LB.
						*** 5	SUPPLEMENTAL INFORMA	TION ***					
		ODE BRACKET MOUNT		MOTOR			HAZA	RDOUS	DRIP				
			PE	TYPE		TATION	SEVERE DUTY		LOCATION COVER NONE NO		SCREENS	PAINT BLUE - RAL 5003 (EPOXY	
51A1	NDARD	ENC	ODER	RIGID	HURIZ	ONTAL	PREMIUM SEVERE DUTY		UNE	NU	NONE	BLUE - R	AL 5003 (EPOAT)
BEA DE	RINGS	GRE	ASE	SHAFT	ТҮРЕ		SPECIAL DE	SPEC	IAL ODE	SHAFT	MATERIAL	FRAM	IE MATERIAL
BALL 6319	BALL 6318	BEAC	ON 325	DBL SP	LEXT	3.375 x 5.38 IN SEK		3.375 x 7.92 IN SEK		1045 HOT ROLLED (C-204)) CAST IRON	
THERM	OSTATS	PROTE	CTORS	WDG R	TD's		BRG RTD's	THER	MISTORS	C	ONTROL	SPACE	HEATERS
TSTA	rs (N/C)	N	ОТ	NON	IE		NONE	N	ONE	L	FALSE		120V
R1 (o	ms/nh)	R2 (ob	ms/ph)	X1 (ohn	ns/nh)		X2 (ohms/ph)	Xm (c	hms/ph)	VIBRA	TION (in/sec)		FLOAT
R1 (ohms/ph) 0.0391			357	0.43			0.6006		48.2972 0.080			ODE	
N O T									INVERTER	TORQUE: D RANGE:	CONSTANT 100: 1.5 X BASE SPE	1 ED	
E									ENCODER:	AVTRON			
S *									AV850			NONE	DDD
-									NONE BRAKE:	NONF		NONE	rpk
PREF	ARED BY:								NO		NONE		
	DATE:	8/29	/2022					1	FT-LB:		NA		
									VOLTAGE:		NONE		HZ:
FORM: 35	31 REV_4	2/27/06						UL:	V-INS, CONS	ST UL REC			