

PRODUCT INFORMATION PACKET

rotor nl®

Model No: 6RN112M06E36U24B3641-A

Catalog No: 6RN112M06E36U24B@3641-A

3.00 kW General Purpose Low Voltage IEC Motor IE3, 3 phase, 1000 rpm, D230/Y400V 50Hz,
112M Frame B14, IC411



Regal and Rotor nl are trademarks of Regal Rexnord Corporation or one of its affiliated companies.
©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E

RegalRexnord



Nameplate Specifications

Output HP	4 Hp	Output KW	3.0 kW
Frequency	50 Hz	Voltage	D230/Y400 V
Current	11.77 A	Speed	965 rpm
Service Factor	1	Phase	3
Efficiency	85.6 %	Power Factor	0.74
Duty	S1	Insulation Class	F
Frame	112M	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Ambient Temperature	40 °C
Drive End Bearing Size	6306-2Z/C3WT (-40°C/+160°C)	Opp Drive End Bearing Size	6306-2Z/C3WT (-40°C/+160°C)
UL	No	CSA	Optional
CE	Yes	IP Code	IP55
Number of Speeds	1	Efficiency Class	IE3

Technical Specifications

Electrical Type	Squirrel Cage	Starting Method	Direct On Line
Poles	6	Rotation	Clockwise Shaft End
Mounting	B14	Motor Orientation	Any
Frame Material	Cast iron	Shaft Type	Keyed
Outline Drawing	6RN112M06E36_3041		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:12/02/2022

Model No. 6-Pole cage motor 6RN 112M 3kW D230V 50Hz IM3641-FT130

U (V)	Δ/Y Conn	f [Hz]	P		I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __load			I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
			[kW]	[hp]					FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
230	D	50	3	4	11,7	965	29,7	IE3	85,6			0,74			5,50	2,00	2,70
400	Y				6,8												
265	D	60	3,45	4,625	11,6	1165	28,2	IE2	87,5			0,74					
460	Y				6,73												

Motor type	6RN112M06E36
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	112M
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	3 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B (80K)
Temperature rise winding	56 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM3641-FT130
Cooling method	IC411
Motor weight - approx.	46 kg
Gross weight - approx.	47 kg
Motor inertia	0,0146 kgm²
Vibration level	according IEC60034-14
Direction of rotation	cw / ccw


Rotor type	Cage motor
Bearing type	6306-2Z/C3WT - 6306-2Z/C3WT
Type of grease	Unirex N3
Phase resistance at 20°C	14,4570 Ohm
Country of origin	CZ

	Locked rotor Torque [nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	200%	319%		270%	7,27 A
@ D 265V 60Hz					

NOTE

All performance values at rated voltage and frequency.
 All performance parameters are subjected to standard tolerance as per IEC 60034-1
 Voltage, Frequency are as per IEC60034-1
 Technical data are subject to change. There may be discrepancies between calculated and name plate values.


Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

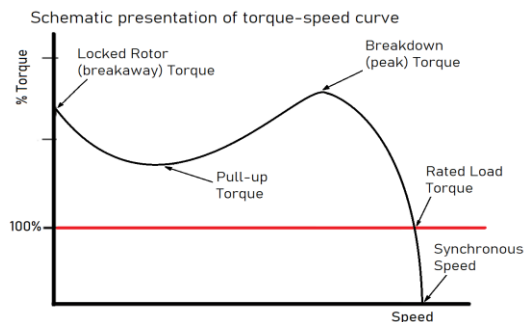

6RN112M06E36 6-pole 3,00kW D/Y 230/400V 50Hz S1 IC411 IE3



Torque versus Speed curve with variable frequency drive

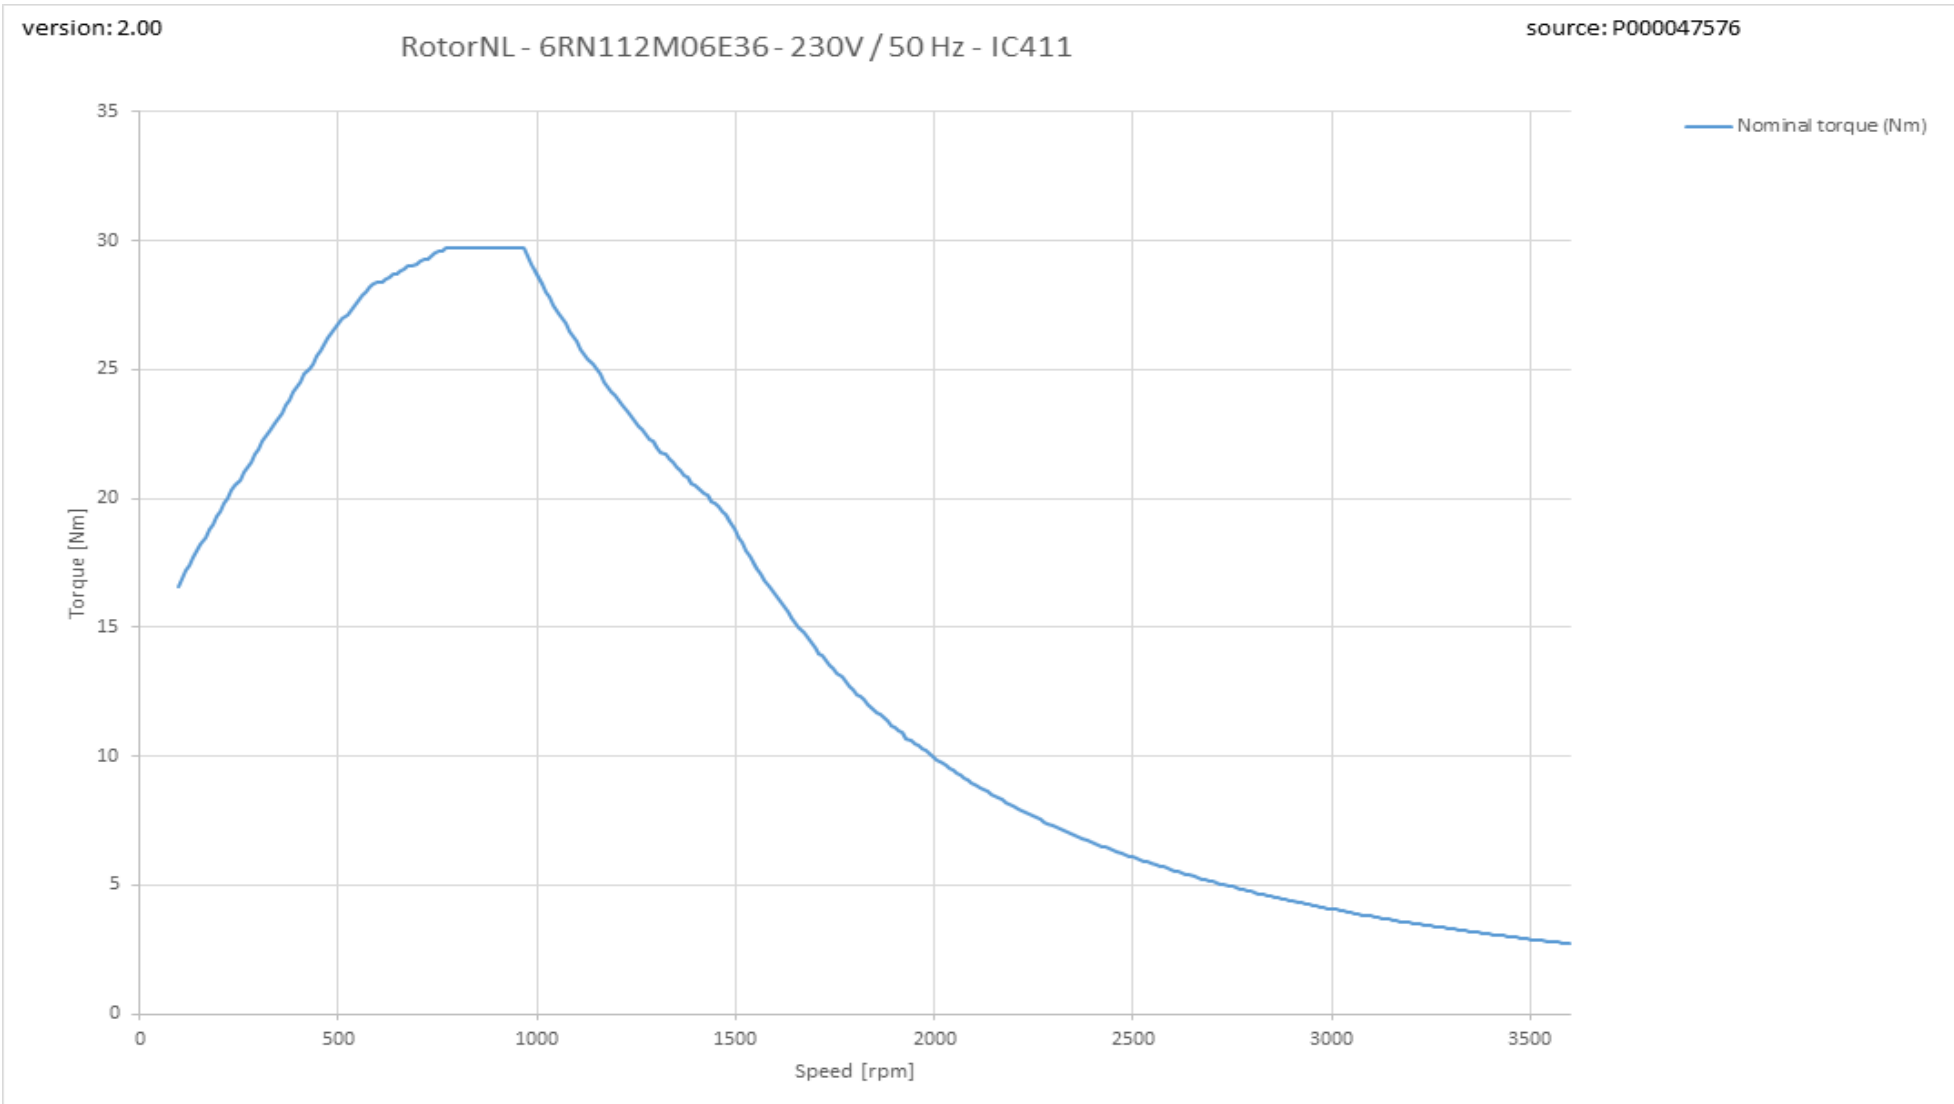

Therm_VSD graph

\\nleibfs01.rbc.int\temp\$\P000047576_Therm_VSD.png