


PRODUCT INFORMATION PACKET



Model No: 6RN112M06E36U46B3641-B

Catalog No: 6RN112M06E36U46B@3641-B

3.00 kW General Purpose Low Voltage IEC Motor IE3, 3 phase, 1000 rpm, D400/Y690V 50Hz,
112M Frame B14, IC411

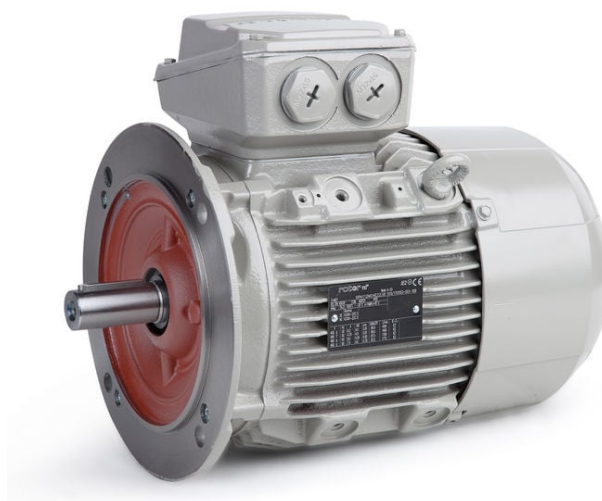

Regal and Rotor nl are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Nameplate Specifications

Output HP	4 Hp	Output KW	3.0 kW
Frequency	50 Hz	Voltage	D400/Y690 V
Current	6.80 A	Speed	965 rpm
Service Factor	1	Phase	3
Efficiency	85.6 %	Power Factor	0.74
Duty	S1	Insulation Class	F
Frame	112M	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Ambient Temperature	40 °C
Drive End Bearing Size	6306-2Z/C3WT (-40°C/+160°C)	Opp Drive End Bearing Size	6306-2Z/C3WT (-40°C/+160°C)
UL	No	CSA	Optional
CE	Yes	IP Code	IP55
Number of Speeds	1	Efficiency Class	IE3

Technical Specifications

Electrical Type	Squirrel Cage	Starting Method	Direct On Line
Poles	6	Rotation	Clockwise Shaft End
Mounting	B14	Motor Orientation	Any
Frame Material	Cast iron	Shaft Type	Keyed
Outline Drawing	6RN112M06E36U46B3641-B		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:12/02/2022

Datasheet

rotor nl®

rotor b.v.

Mors 1-5, 7151 MX Eibergen NL
www.rotor.nl tel.: +31 545 464640
sales@rotor.nl tel.: +31 545 464646

Model No. 6-Pole cage motor 6RN 112M 3kW D400V 50Hz IM1081

U (V)	Δ / Y Conn	f [Hz]	P [kW]	P [hp]	I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load FL 3/4FL 1/2FL	PF at __ load FL 3/4FL 1/2FL	I _A /I _N [pu]	T _A /T _N [pu]	T _K /T _N [pu]
400	D	50	3	4	6,8	965	29,7	IE3	85,6	0,74	5,50	2,00	2,70
690	Y				3,93								
460	D	60	3,45	4,625	6,2	1175	28,2	IE2	87,5	0,72	8,19	2,82	3,40

Motor type	6RN112M06E36
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	112M
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	3 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B (80K)
Temperature rise winding	56 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Degree of protection	IP55
Mounting type	IM1081
Cooling method	IC411
Motor weight - approx.	46 kg
Gross weight - approx.	47 kg
Motor inertia	0,0146 kgm²
Vibration level	according IEC60034-14
Direction of rotation	cw / ccw

Rotor type	Cage motor
Bearing type	6306-2Z/C3WT - 6306-2Z/C3WT
Type of grease	Unirex N3

Phase resistance at 20°C	4,7800 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	200%	550%		270%	4,18 A
@ D 460V 60Hz	282%	819%		340%	3,81 A

NOTE


All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

Voltage, Frequency are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

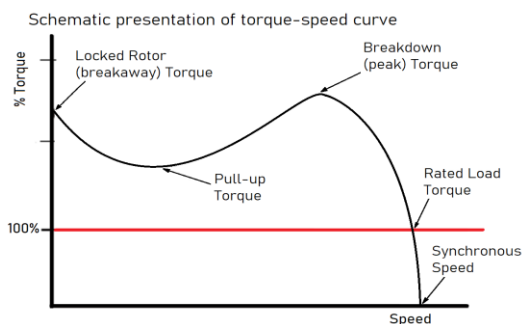

rotor
is a
ISO 9001
certified
company

This is an uncontrolled copy, data can be changed anytime.

REGAL BvD

6RN112M06E36 6-pole 3,00kW D/Y 400/690V 50Hz S1 IC411 IE3



Torque versus Speed curve with variable frequency drive

