

PRODUCT INFORMATION PACKET

rotor nl[®]

Model No: 6RN160M04E42U243041

Catalog No: 6RN160M04E42U24@3041

11.00 kW General Purpose Low Voltage IEC Motor IE4, 3 phase, 1500 rpm, D230/Y400V 50Hz,
160M Frame B5, IC411

Regal and Rotor nl are trademarks of Regal Rexnord Corporation or one of its affiliated companies.
©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E

RegalRexnord



Nameplate Specifications

Technical Specifications

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:01/19/2023

Datasheet



Mors 1-5, 7151 MX Eibergen NL
 www.rotor.nl tel.: +31 545 464640
 sales@rotor.nl tel.: +31 545 464646

Model No. 4-Pole cage motor 6RN 160M 11kW D230V 50Hz IM3041-FF300

U (V)	Δ/Y Conn	f [Hz]	P		I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __load			I _A /I _N [pu]	T _A /T _N [pu]	T _R /T _N [pu]
			[kW]	[hp]					FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
230	D	50	11	15	36	1479	71	IE4	93,4			0,83			9,12	2,84	4,02
400	Y				21												

Motor type	6RN160M04E42
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	160M
Duty	S1
Voltage	230 V
Frequency	50 Hz
Power output	11 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B (80K)
Temperature rise winding	35 K
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area

Rotor type	Cage motor
Bearing type	6309-2Z/C3WT

Type of grease	Unirex N3
----------------	------------------

Country of origin	CZ
-------------------	-----------


Voltage/Freq	Locked rotor Torque [% nom]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 230V 50Hz	284%	911%	266%	402%	16,5 A

NOTE
 All performance values at rated voltage and frequency.
 All performance parameters are subjected to standard tolerance as per IEC 60034-1
 Voltage, Frequency are as per IEC60034-1
 Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

Degree of protection	IP55
Mounting type	IM3041-FF300
Cooling method	IC411
Motor weight - approx.	127 kg
Gross weight - approx.	131 kg
Motor inertia	0,0990 kgm²
Vibration level	according IEC60034-14
Noise level (pressure) acc 60034-9	63 dB(A)

Direction of rotation	cw / ccw
-----------------------	-----------------

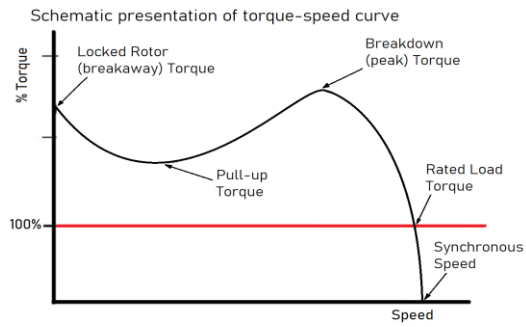

V2.07


This is an uncontrolled copy, data can be changed anytime.



6RN160M04E42 4-pole 11,00kW D/Y 230/400V 50Hz S1 IC411 IE4




Torque versus Speed curve with variable frequency drive

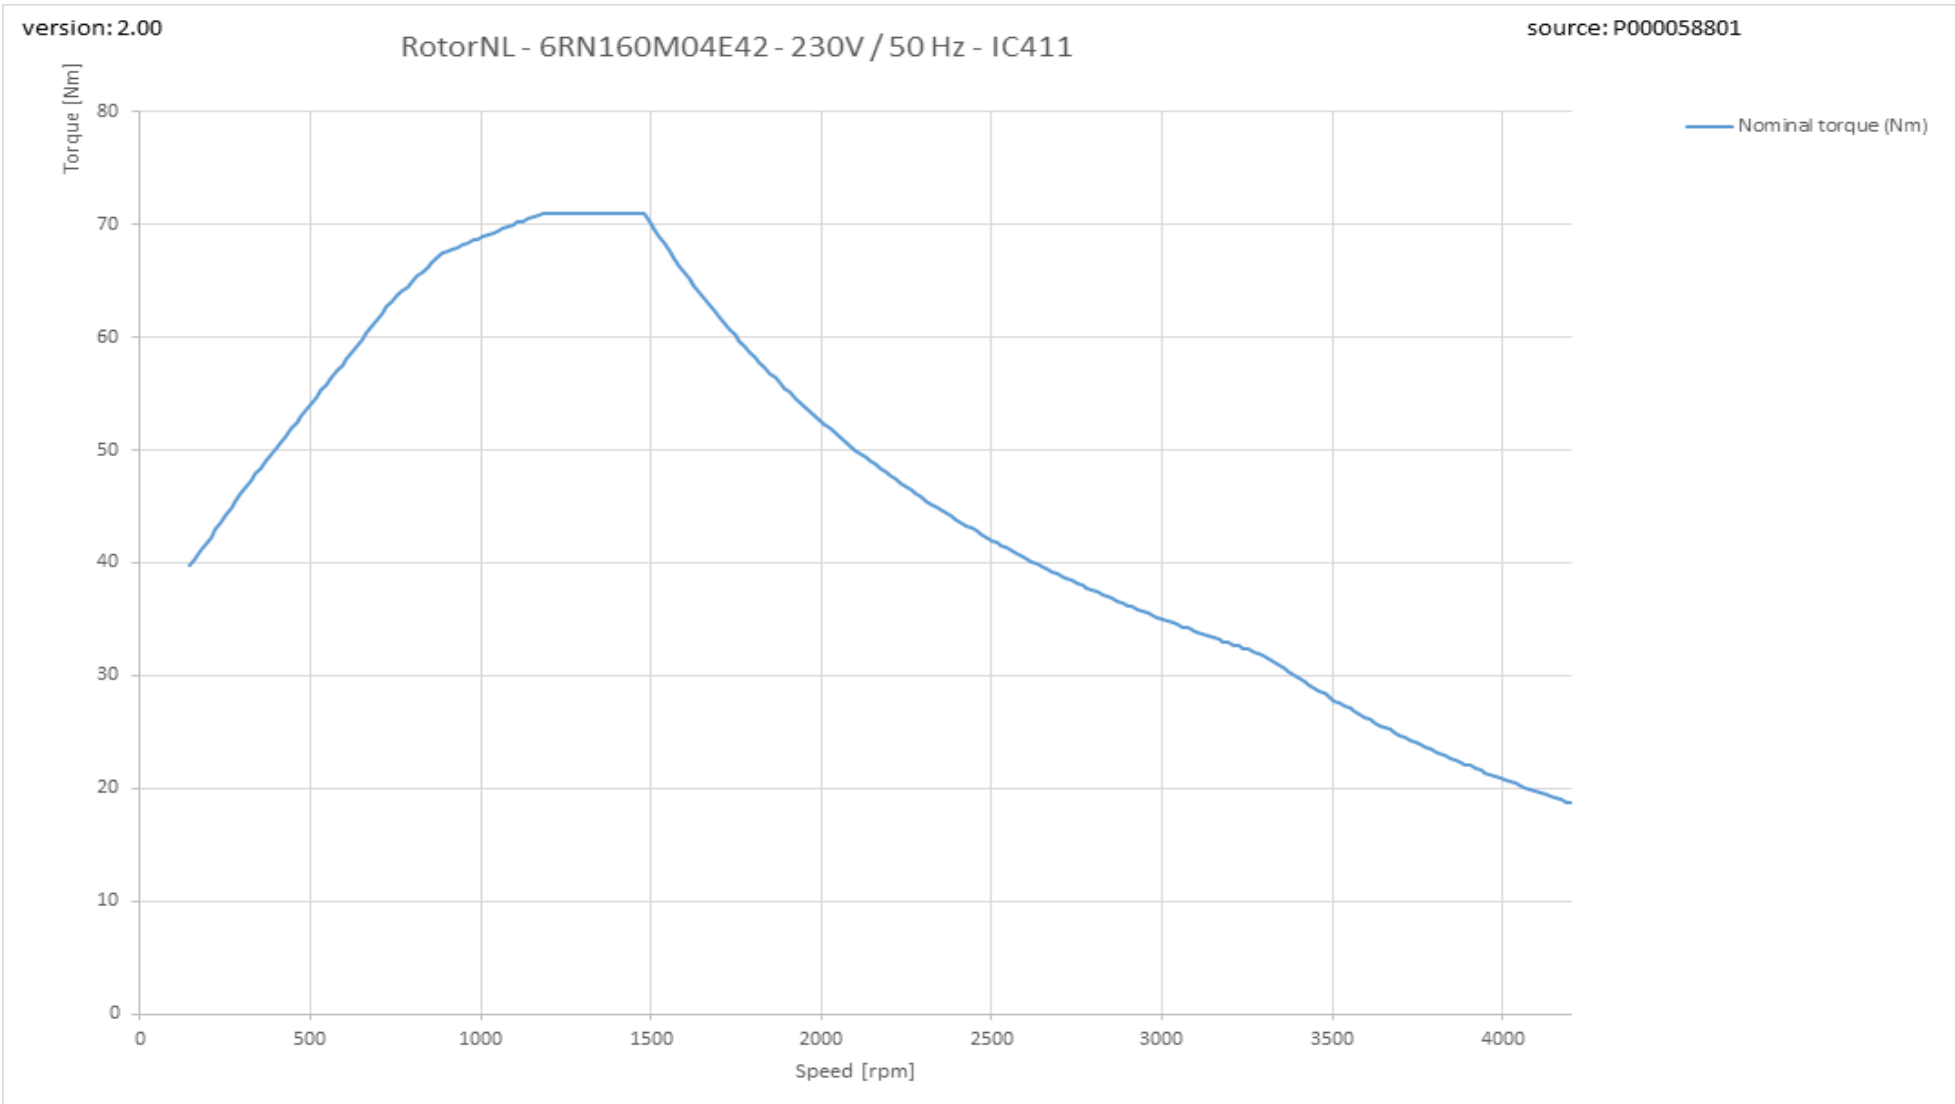

This is an uncontrolled copy - document subject to change - alterations reserved without notice

Therm_VSD graph

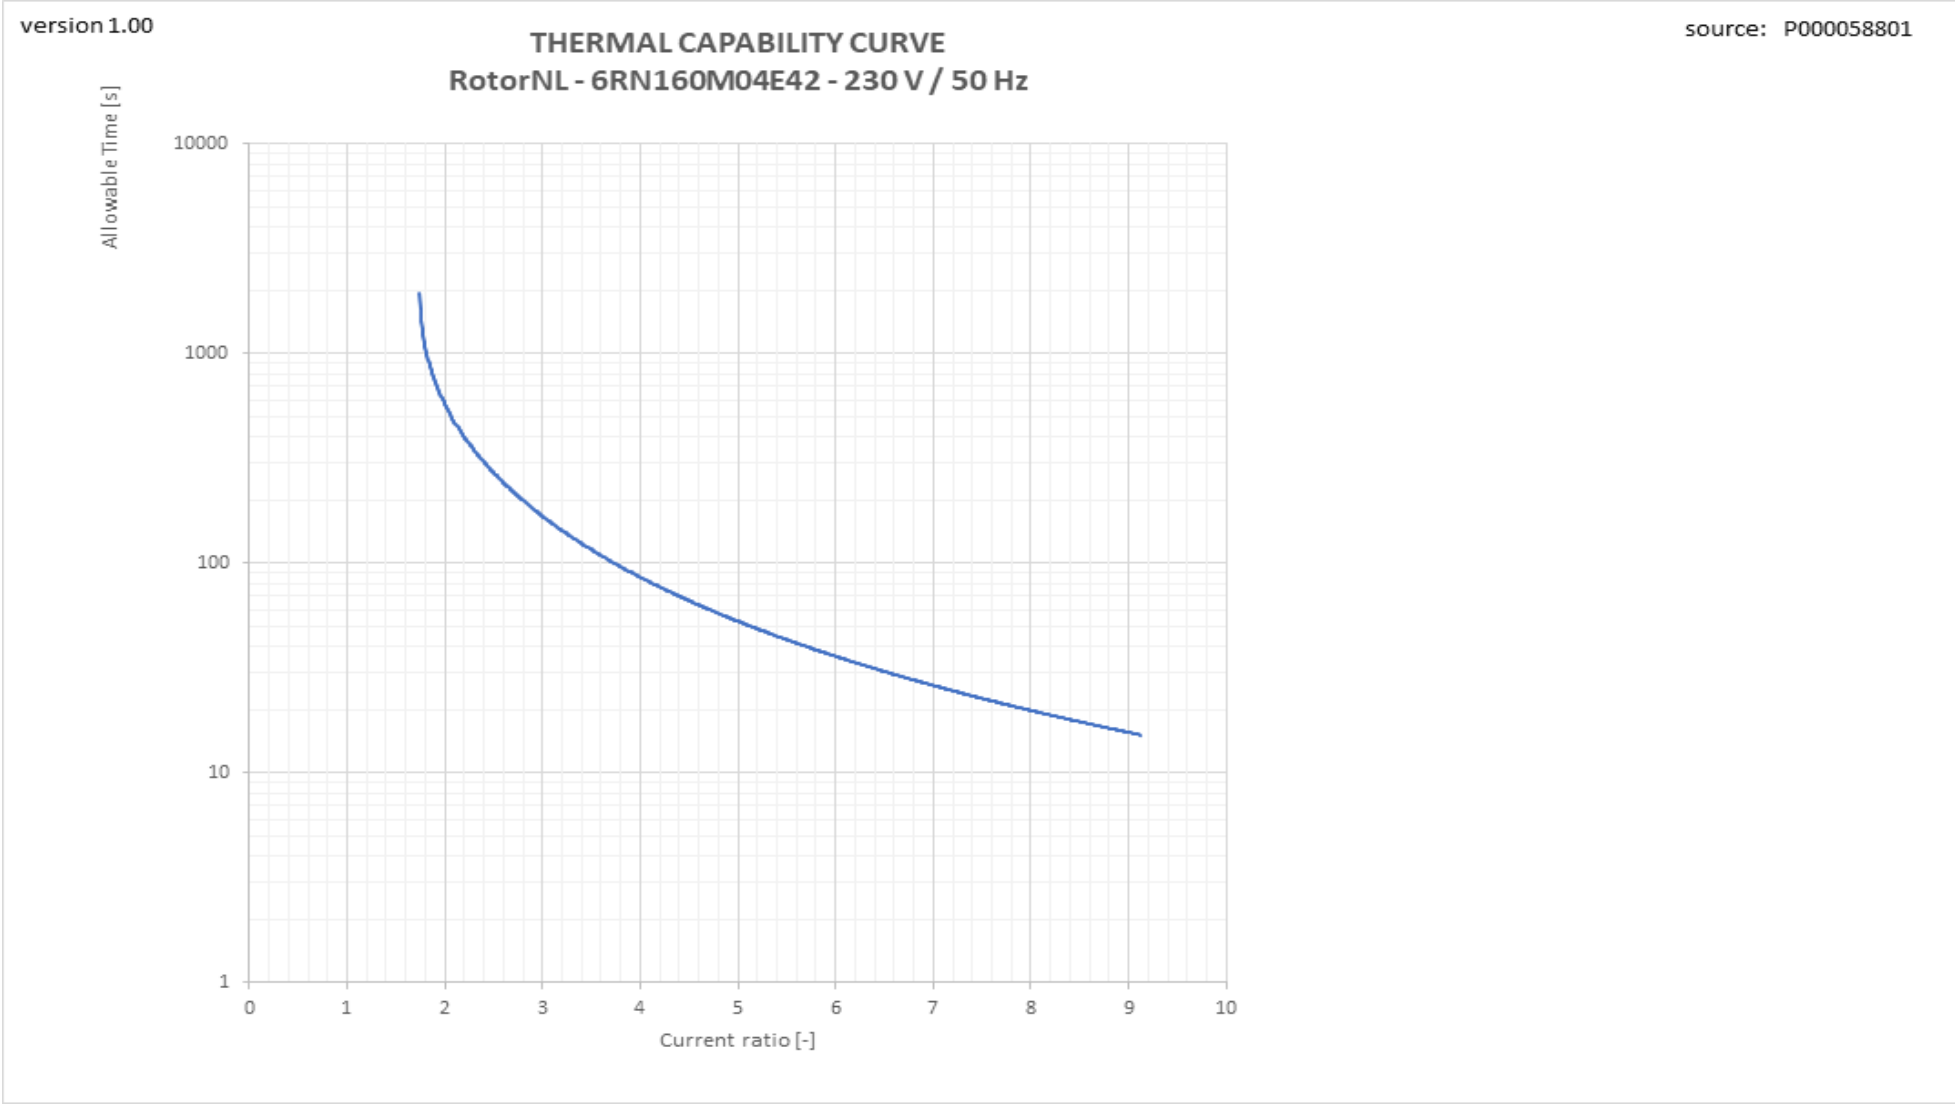

This is an uncontrolled copy - document subject to change - alterations reserved without notice