


PRODUCT INFORMATION PACKET



Model No: 6RN250M04E36U46B2021

Catalog No: 6RN250M04E36U46B@2021

75.00 kW General Purpose Low Voltage IEC Motor IE3, 3 phase, 1500 rpm, D400/Y690V 50Hz,
250M Frame B35, IC411

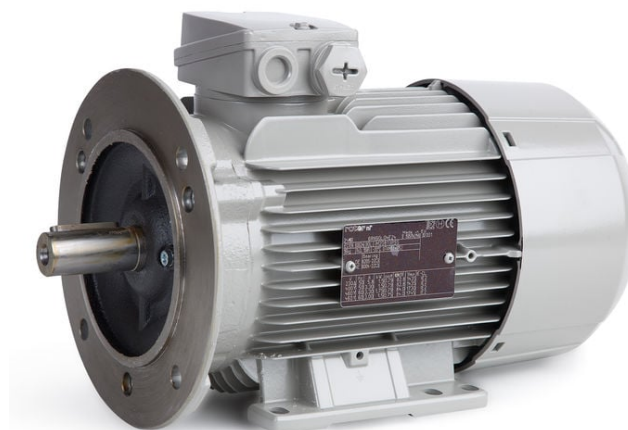

Regal and Rotor nl are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Nameplate Specifications

Output HP	100.00 Hp	Output KW	75.0 kW
Frequency	50 Hz	Voltage	D400/Y690 V
Current	134.40 A	Speed	1476 rpm
Service Factor	1	Phase	3
Efficiency	95 %	Power Factor	0.84
Duty	S1	Insulation Class	F
Frame	250M	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Ambient Temperature	40 °C
Drive End Bearing Size	6315/C3	Opp Drive End Bearing Size	6315/C3
UL	No	CSA	Optional
CE	Yes	IP Code	IP55
Number of Speeds	1	Efficiency Class	IE3

Technical Specifications

Electrical Type	Squirrel Cage	Starting Method	Direct On Line
Poles	4	Rotation	Clockwise Shaft End
Mounting	B35	Motor Orientation	Any
Frame Material	Cast iron	Shaft Type	Keyed
Outline Drawing	6RN250M04E36_2041		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:01/19/2023

Datasheet



Mors 1-5, 7151 MX Eibergen NL
 www.rotor.nl tel.: +31 545 464640
 sales@rotor.nl tel.: +31 545 464646

Model No. 4-Pole cage motor 6RN 250M 75kW D400V 50Hz IM2021-FF500

U (V)	Δ / Y Conn	f [Hz]	P		I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __load			I _A /I _N [pu]	T _A /T _N [pu]	T _R /T _N [pu]
			[kW]	[hp]					FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	75	100	134	1476	482	IE3	95,4			0,84			8,24	2,89	3,38
690	Y		77,6														
460	D	60	86	115,3	131	1785	460	IE3	95,7			0,86			8,31	2,89	3,24

Motor type	6RN250M04E36
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	250M
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	75 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B (80K)
Temperature rise winding	66 K
Temperature rise surface	45 K
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area


Degree of protection	IP55
Mounting type	IM2021-FF500
Cooling method	IC411
Motor weight - approx.	530 kg
Gross weight - approx.	550 kg
Motor inertia	1,1000 kgm²
Vibration level	according IEC60034-14
Direction of rotation	cw / ccw

Rotor type	Cage motor
Bearing type	6315/C3
Lubrication method	25gr/8000hrs
Type of grease	Unirex N3
Phase resistance at 20°C	0,0536 Ohm
Country of origin	CZ

Voltage/Freq	Locked rotor Torque [nom] [%]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	289%	820%	252%	338%	51,2 A
@ D 460V 60Hz	289%	832%	240%	324%	46,2 A

NOTE
 All performance values at rated voltage and frequency.
 All performance parameters are subjected to standard tolerance as per IEC 60034-1
 Voltage, Frequency are as per IEC60034-1
 Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30

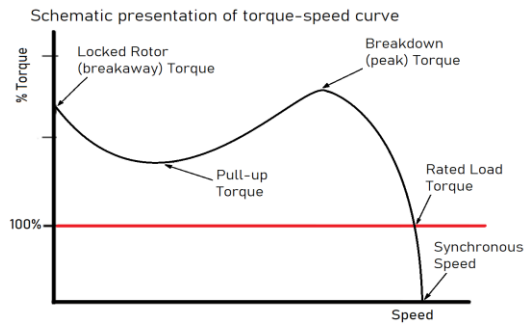

V2.07


This is an uncontrolled copy, data can be changed anytime.



6RN250M04E36 4-pole 75,00kW D/Y 400/690V 50Hz S1 IC411 IE3




Torque versus Speed curve with variable frequency drive

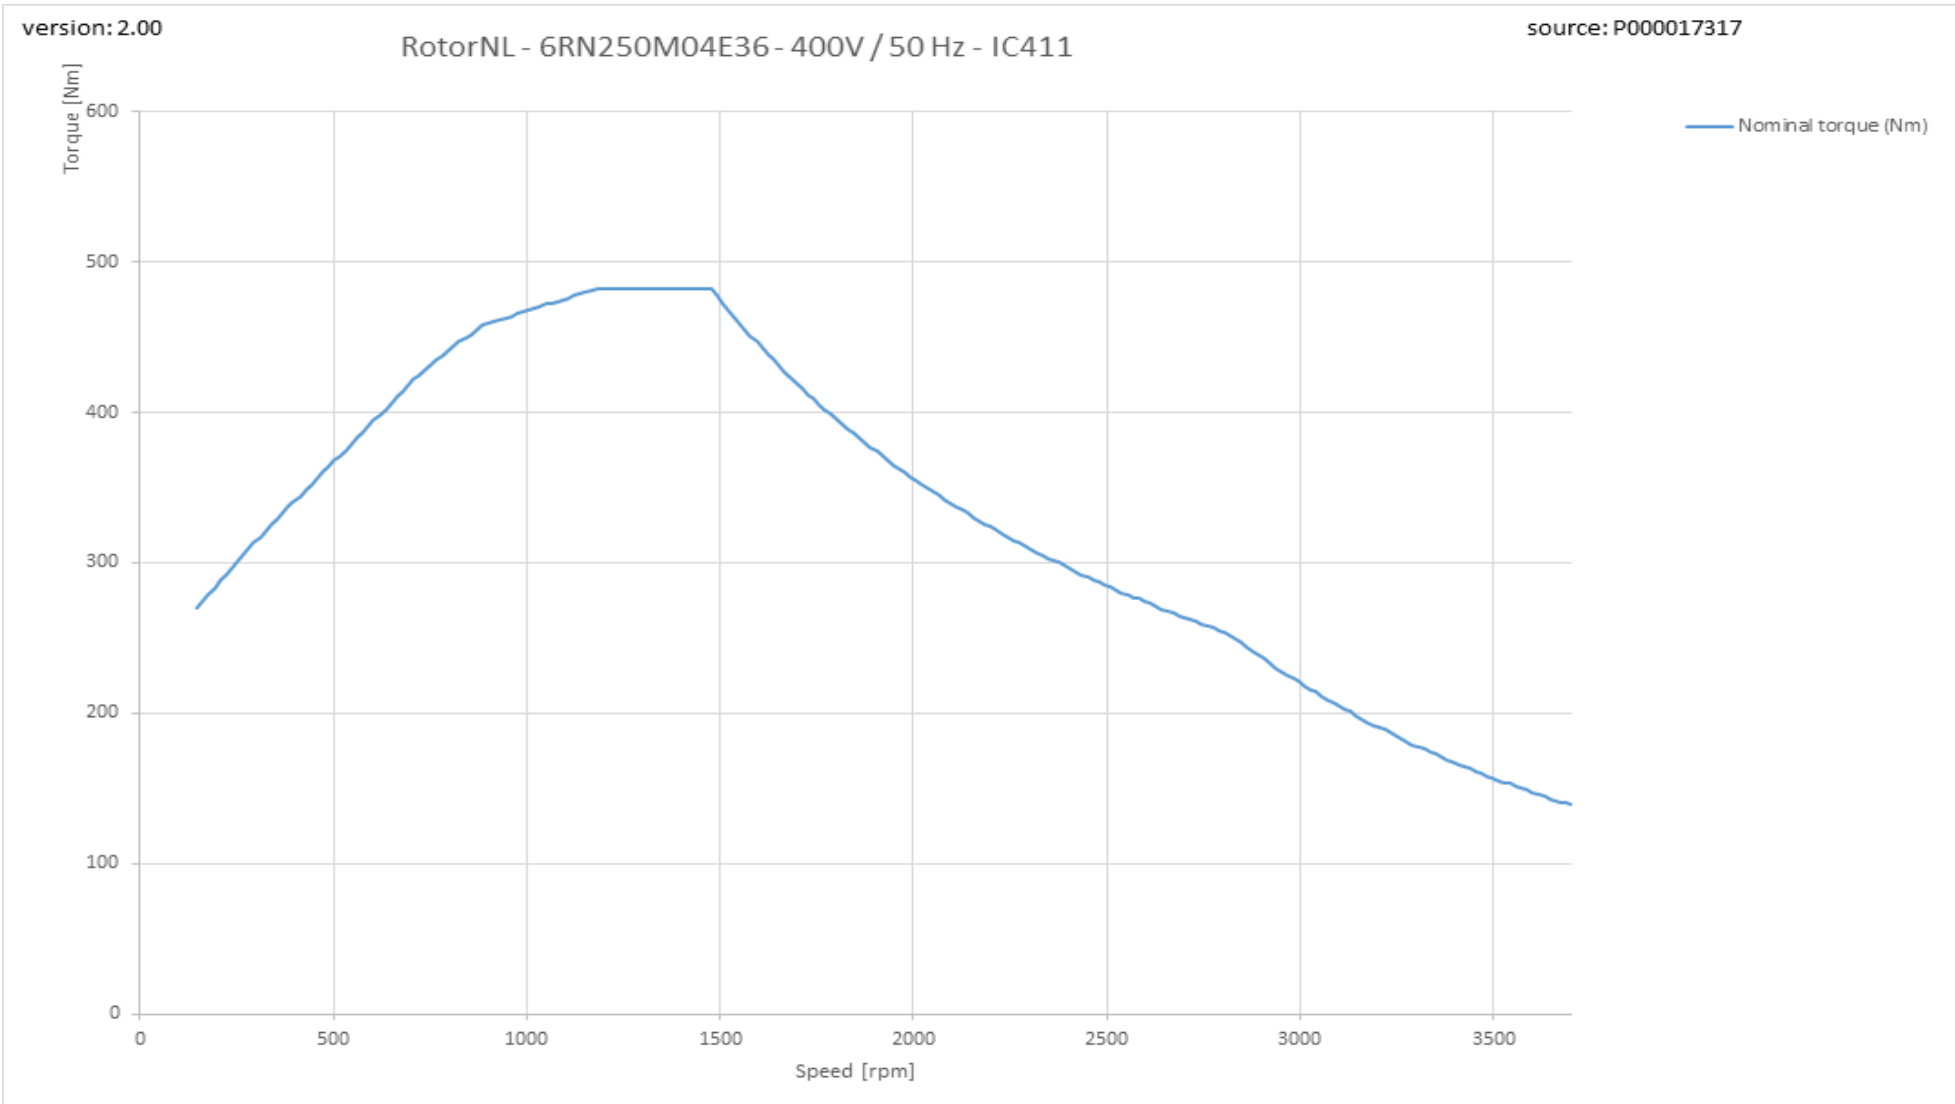


This is an uncontrolled copy - document subject to change - alterations reserved without notice

Therm_VSD graph

This is an uncontrolled copy - document subject to change - alterations reserved without notice

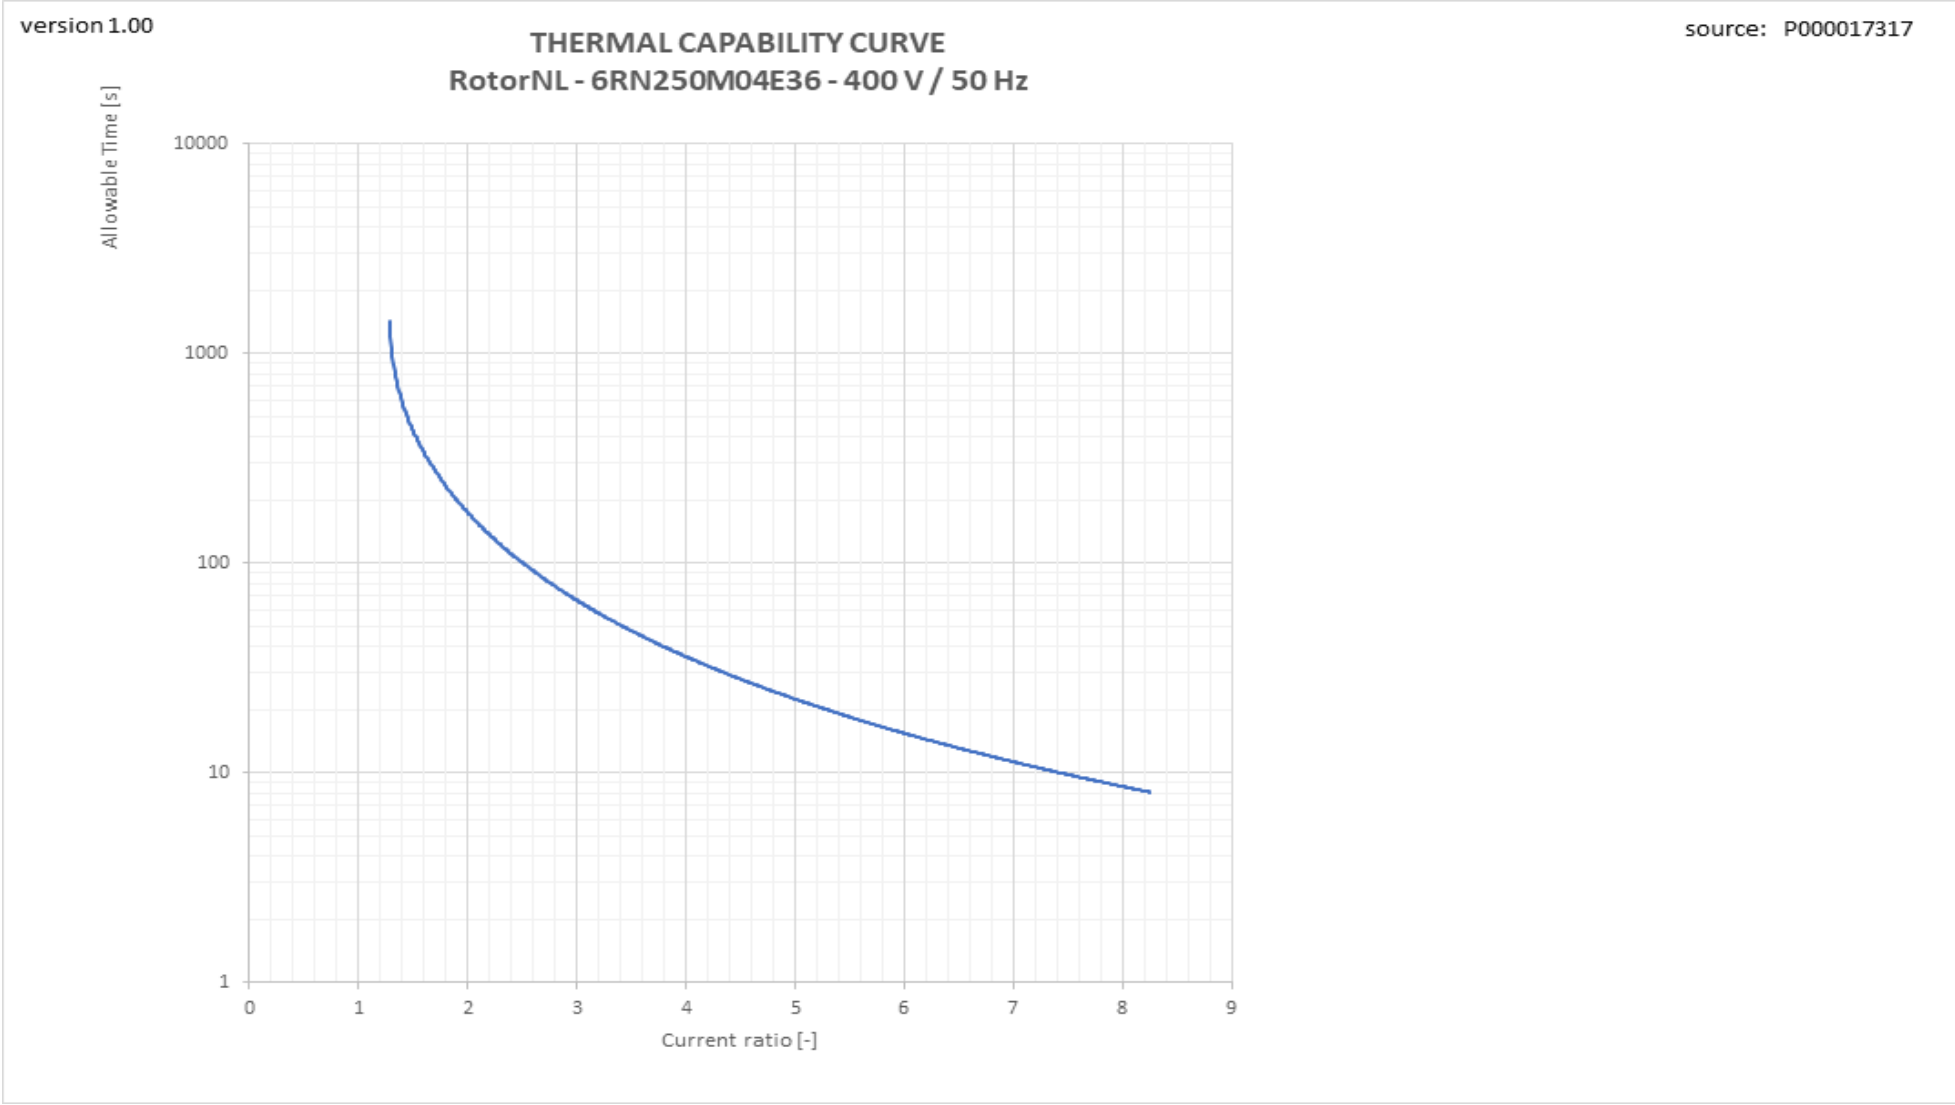

Tn graph

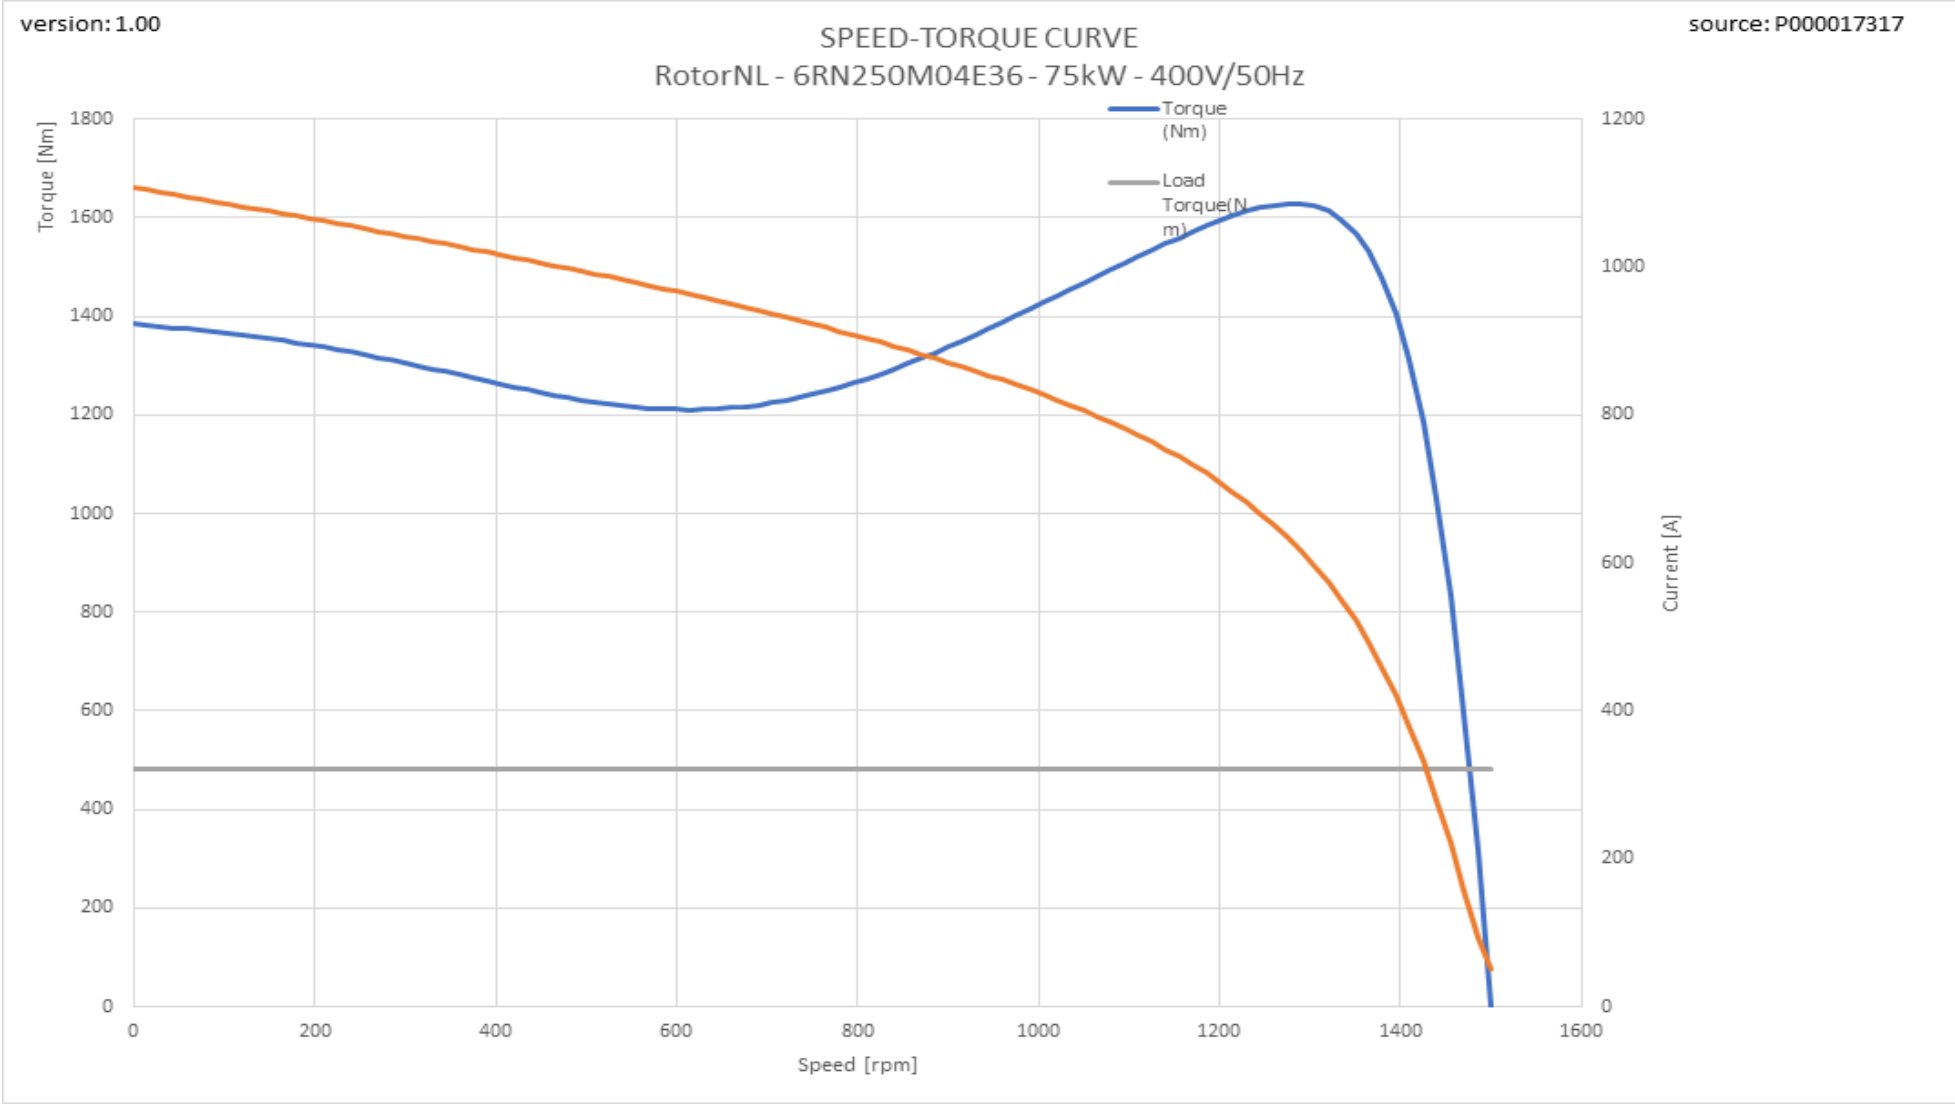

This is an uncontrolled copy - document subject to change - alterations reserved without notice