

PRODUCT INFORMATION PACKET

rotor nl[®]

Model No: 6RN315M06E42U461041

Catalog No: 6RN315M06E42U46@1041

90.00 kW General Purpose Low Voltage IEC Motor IE3, 3 phase, 1000 rpm, D400/Y690V 50Hz,
315M Frame B3, IC411



Regal and Rotor nl are trademarks of Regal Rexnord Corporation or one of its affiliated companies.
©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E

RegalRexnord



Nameplate Specifications

Technical Specifications

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:01/19/2023

Datasheet



Mors 1-5, 7151 MX Eibergen NL
 www.rotor.nl tel.: +31 545 464640
 sales@rotor.nl tel.: +31 545 464646

Model No. 6-Pole cage motor 6RN 315M 90kW D400V 50Hz IM1041

U (V)	Δ/Y Conn	f [Hz]	P		I [A]	n [RPM]	T [Nm]	IE Class	% EFF at __ load			PF at __load			I _A /I _N [pu]	T _A /T _N [pu]	T _R /T _N [pu]
			[kW]	[hp]					FL	3/4FL	1/2FL	FL	3/4FL	1/2FL			
400	D	50	90	120	160	993	886	IE4	95,6			0,85			7,20	2,70	3,00
690	Y				92,4												
460	D	60	108	144,8	166	1192	865	IE4	95,8			0,85			7,20	2,40	2,70

Motor type	6RN315M06E42
Enclosure	Totally Enclosed Fan Cooling
Frame Material	Cast iron
Frame size	315M
Duty	S1
Voltage	400 V
Frequency	50 Hz
Power output	90 kW
Insulation class	F
Ambient temperature	-20 till 40 °C
Temperature rise	temp.rise acc. B (80K)
Temperature rise surface	
Altitude above sea level	1000 mtr
Hazardous area classification	Safe area
Rotor type	Cage motor
Bearing type	6319/C3
Lubrication method	40gr/6000hrs
Type of grease	Unirex N3
Country of origin	CZ

Degree of protection	IP55
Mounting type	IM1041
Cooling method	IC411
Motor weight - approx.	890 kg
Gross weight - approx.	920 kg
Vibration level	according IEC60034-14
Direction of rotation	cw / ccw
	PTC 150°C


Voltage/Freq	Locked rotor Torque [nom] [%]	Starting current [% nom]	Pull-up Torque [% nom]	Breakdown Torque [% nom]	No-load Current [A]
@ D 400V 50Hz	270%	718%		300%	
@ D 460V 60Hz	240%	716%		270%	

NOTE

All performance values at rated voltage and frequency.
 All performance parameters are subjected to standard tolerance as per IEC 60034-1
 Voltage, Frequency are as per IEC60034-1
 Technical data are subject to change. There may be discrepancies between calculated and name plate values.

Efficiency	Europe	Global IEC
Standards	EN-IEC: 60034-30	IEC: 60034-30


This is an uncontrolled copy, data can be changed anytime.

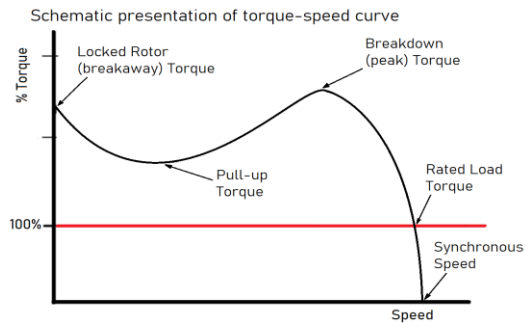

6RN315M06E42 6-pole 90,00kW D/Y 400/690V 50Hz S1 IC411 IE4



Torque versus Speed curve with variable frequency drive

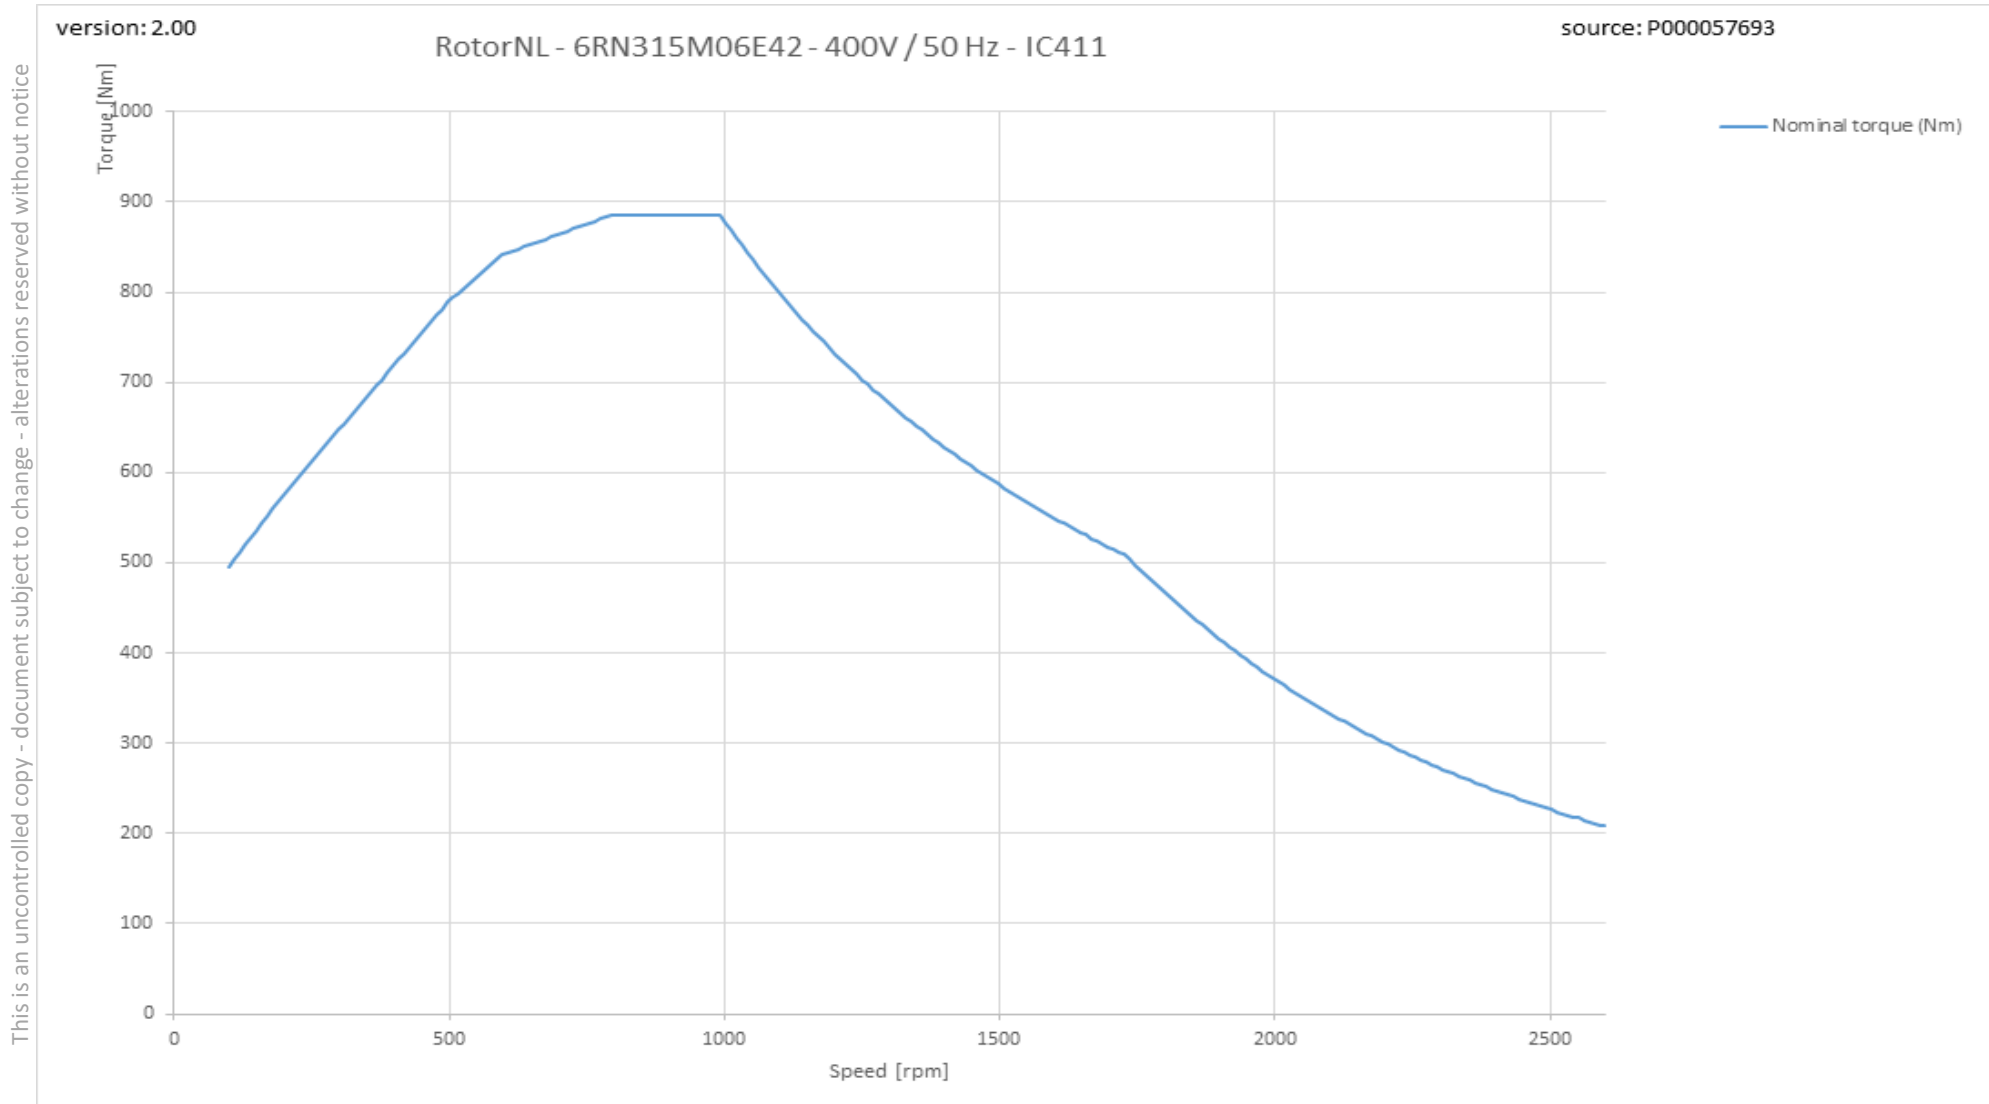

This is an uncontrolled copy - document subject to change - alterations reserved without notice