
PRODUCT INFORMATION PACKET



Model No: EXG140619.00 Catalog No: EXG140619.00 EXG140619.00..10/7.5HP..1760/1450RPM.215JM.ODP.208-230/460//190/380V.3PH.60/50HZ.CONT.40C.1.15SF.RI GID.....





Product Information Packet: Model No: EXG140619.00, Catalog No:EXG140619.00 EXG140619.00..10/7.5HP..1760/1450RPM.215JM.ODP.208-230/460//190/380V.3PH.60/50HZ.CONT.40C.1.15SF.RIGID.....

LEESON


Nameplate Specifications

Phase	3	Output HP	10 & 7.50 Hp
Output KW	7.5 & 5.6 kW	Voltage	208-230/460 & 190/380 V
Speed	1760 & 1450 rpm	Service Factor	1.15 & 1.15
Frame	215JM	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	89.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	29-28/14 & 26/13 A	Power Factor	74
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	Н
Drive End Bearing Size	6209	Opp Drive End Bearing Size	6206
UL	Recognized	CSA	Υ
CE	Υ	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line	
Poles	4	Rotation	Reversible	
Resistance Main	.976 Ohms	Mounting	Rigid Base	
Motor Orientation	Horizontal	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel	
Shaft Type	JM	Assembly/Box Mounting	F1 ONLY	
Outline Drawing	037704-1100	Connection Drawing	005010.01	

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

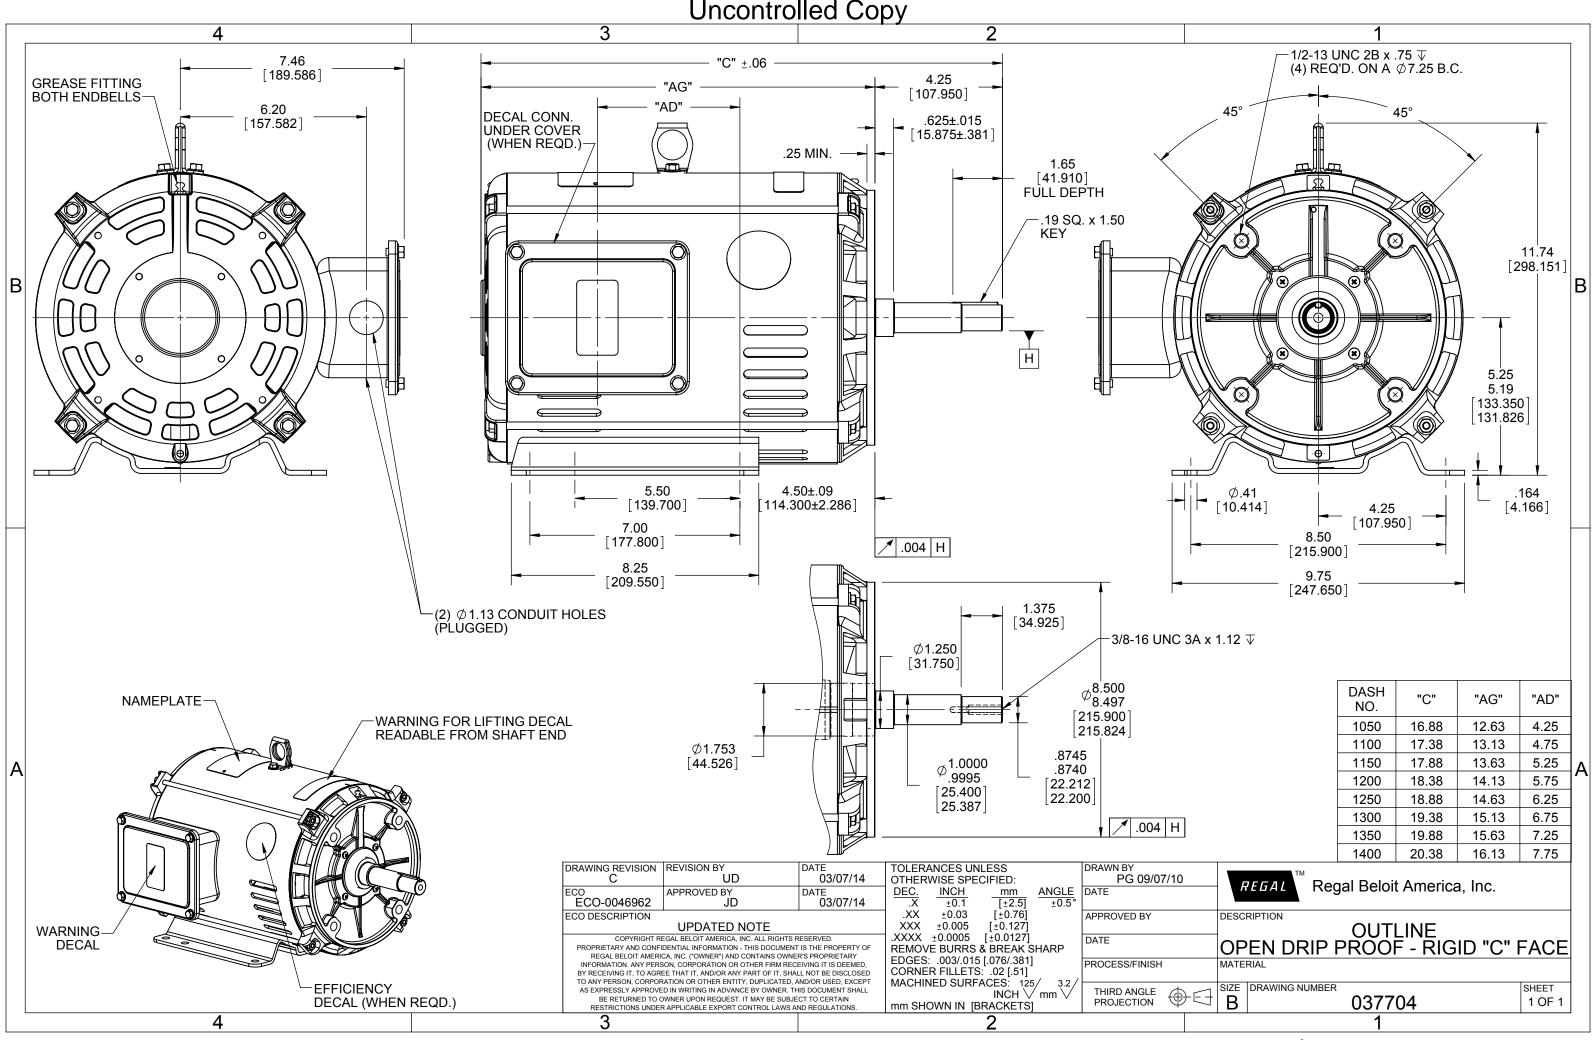

3 of 4

Uncontrolled Copy

