
PRODUCT INFORMATION PACKET



Model No: EXG140668.00 Catalog No: EXG140668.00 EXG140668.00..10/7.5HP..1760/1450RPM.215JP.ODP.208-230/460//190/380V.3PH.60/50HZ.CONT.40C.1.15SF.RI GID.....





Product Information Packet: Model No: EXG140668.00, Catalog No:EXG140668.00 EXG140668.00..10/7.5HP..1760/1450RPM.215JP.ODP.208-230/460//190/380V.3PH.60/50HZ.CONT.40C.1.15SF.RIGID.....

LEESON


Nameplate Specifications

3	Output HP	10 & 7.50 Hp
7.5 & 5.6 kW	Voltage	208-230/460 & 190/380 V
1760 & 1450 rpm	Service Factor	1.15 & 1.15
215JP	Enclosure	Drip Proof
No Protection	Efficiency	89.5 %
40 °C	Frequency	60 & 50 Hz
29-28/14 & 26/13 A	Power Factor	74
Continuous	Insulation Class	F
В	KVA Code	н
6209	Opp Drive End Bearing Size	6206
Recognized	CSA	Y
Y	IP Code	22
1		
	7.5 & 5.6 kW 1760 & 1450 rpm 215JP No Protection 40 °C 29-28/14 & 26/13 A Continuous B 6209 Recognized	7.5 & 5.6 kWVoltage1760 & 1450 rpmService Factor215JPEnclosureNo ProtectionEfficiency40 °CFrequency29-28/14 & 26/13 APower FactorContinuousInsulation ClassBKVA Code6209Opp Drive End Bearing SizeRecognizedCSA

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line	
Poles	4	Rotation	Reversible	
Resistance Main	.976 Ohms	Mounting	Rigid Base	
Motor Orientation	Horizontal	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel	
Shaft Type	JP	Assembly/Box Mounting	F1 ONLY	
Outline Drawing	037623-1100	Connection Drawing	005010.01	

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

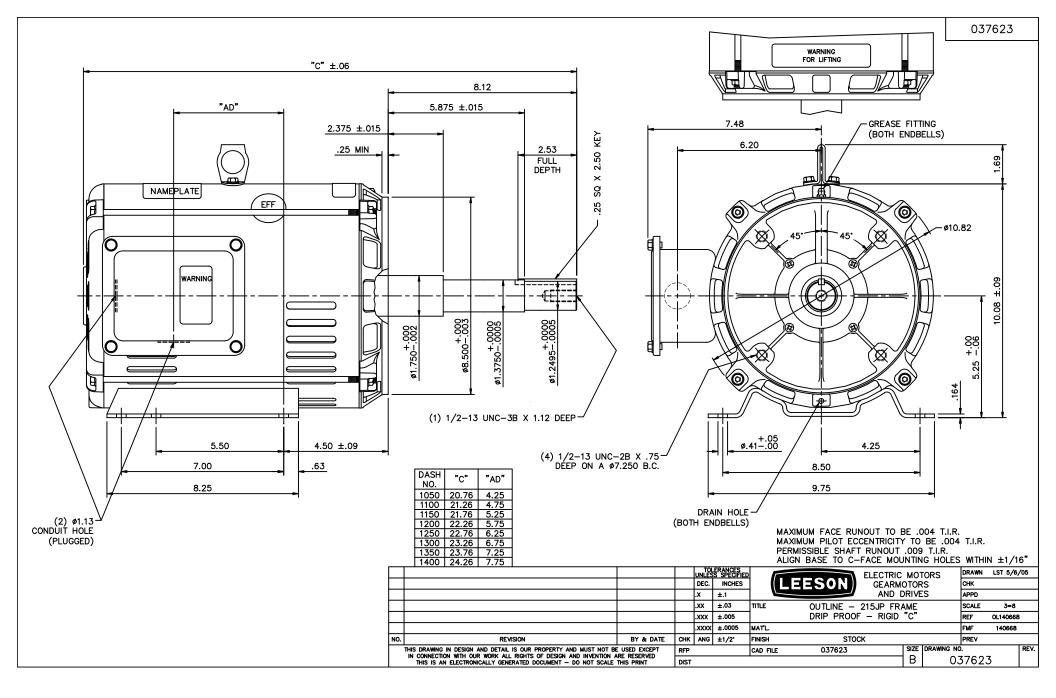

Uncontrolled Copy

