## PRODUCT INFORMATION PACKET



Model No: EXG151741.60 Catalog No: EXG151741.60

EXG151741.60..5.0/3.0HP..1755/1465RPM.184JP.TEFC.208-230/460//190/380V.3PH.60/50HZ.CONT.40C.1.15SF.

RIGID.....






## Nameplate Specifications

Phase	3	Output HP	5 & 3 Hp
Output KW	3.7 & 2.2 kW	Voltage	208-230/460 & 190/380 V
Speed	1755 & 1465 rpm	Service Factor	1.15 & 1.15
Frame	184JP	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	87.5 & 86.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	14.4-13.8/6.9 & 11.2/5.6 A	Power Factor	77.7
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	J
Drive End Bearing Size	6207	Opp Drive End Bearing Size	6205
UL	Recognized	CSA	Υ
CE	Υ	IP Code	55
Number of Speeds	1		

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.754 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	JP	Assembly/Box Mounting	F2/F1 CAPABLE
Inverter Load	CONSTANT 10:1		
Outline Drawing	SS622301	Connection Drawing	00501001

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

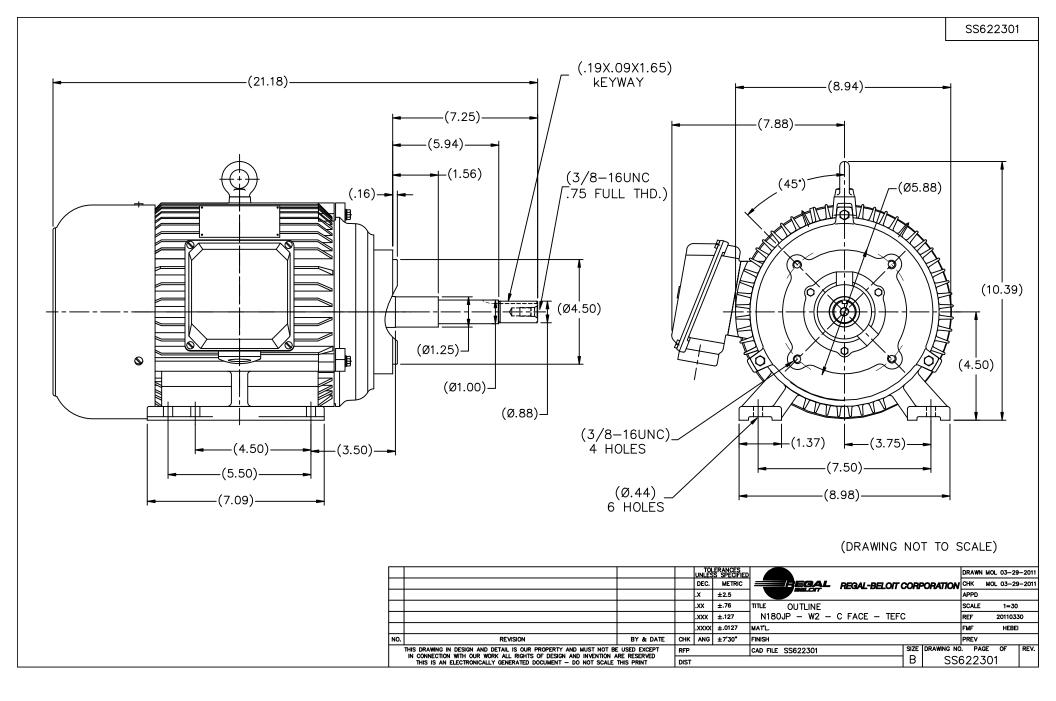

## Uncontrolled Copy

