PRODUCT INFORMATION PACKET



Model No: EXG825194.00 Catalog No: EXG825194.00 EXG825194.00..10/7.5HP..1760/1455RPM.215TC.EPFC.230/460/190/380V.3PH.60/50HZ.CONT.40C.1.0SF.ROUND..

.....

Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. \hat{A} ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: EXG825194.00, Catalog No:EXG825194.00 EXG825194.00..10/7.5HP..1760/1455RPM.215TC.EPFC.230/460/190/380V.3PH.60/50HZ.CONT.40C.1.0SF.ROUND.....

Nameplate Specifications


Phase	nase 3		10 & 7.50 Hp				
Output KW	7.5 & 5.6 kW	Voltage	230/460 & 190/380 V				
Speed	1760 & 1455 rpm	Service Factor	1.0 & 1.0				
Frame	215TC	Enclosure	Explosion Proof Fan cooled				
Thermal Protection	Thermostat	Efficiency	89.5 & 89.5 %				
Ambient Temperature	40 °C	Frequency	60 & 50 Hz				
Current	25/12.5 & 23/11.5 A	Power Factor	83.5				
Duty	Continuous	Insulation Class	F				
Design Code	В	KVA Code	F 6208				
Drive End Bearing Size	6309	Opp Drive End Bearing Size					
UL	No	CSA	Ν				
CE	Ν	IP Code	54				
Number of Speeds	No	Hazardous Location	EXP PROOF CL I GR D CL II GR F&G T3B				

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line		
Poles	4	Rotation	Reversible		
Resistance Main	1.18 Ohms	Mounting	Round		
Motor Orientation Horizontal		Drive End Bearing	Ball		
Opp Drive End Bearing	Ball	Frame Material	Cast Iron		
Shaft Type	т	Assembly/Box Mounting	F1 ONLY		
Outline Drawing	037703LE-1212	Connection Drawing	EE7038T-LE		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

LEESON

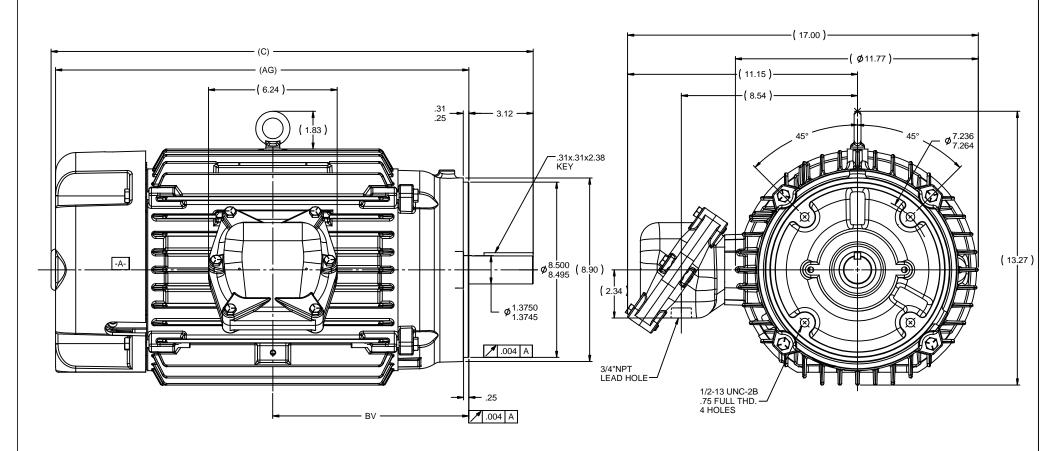

NOTES:

1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.

2. CONDUIT BOX CAN BE MOUNTED IN OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°. THIS MODIFICATION CAN BE PERFORMED ONLY BY THE ORGINAL EQUIPMENT MANUFACTURER, OR BY A FACILITY THAT IS COVERED UNDER UNDERWRITERS LABORATORIES INC. CATEGORY PTKQ, TITLED "MOTOR AND GENERATORS, REBUILT FOR USE IN HAZARDOUS LOCATION". 3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR.

1212	213/215	23.45	20.11	9.5
912	213/215	20.45	17.11	8
DASH	FRAME	С	AG	BV

				UNLE	LERANCES SS SPECIFIED		ELECTRIC M		RS		NB 9/15/20	
⊢				DEC	INCHES	(LIEESON)	GEARMOTORS AND DRIVES				ST 9/15/20	<u>)11</u>
⊢					±.1					APPR		
\vdash						TITLE OUTLINE					1:8	
⊢				XXX	±.005	210 FR EPFC - C'FACE				REF	037703	
				хххх	±.0005	MAT'L				FMF		
N		BY & DATE	CHK /	ANG	±7'30"	FINISH			-	PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK, ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED.			RFP CAD FILE				SIZE	DRAWING	NO		REV	
1."				DIST 037703LE				В	037703LE			