
PRODUCT INFORMATION PACKET

Model No: G130004.00 Catalog No: G130004.00 SOLETE - REPLACED BY 131520.00 - 5HP..1760RPM.184.DP./V.3PH.60HZ.CONT.NOT.40C.1.15SF.RIGID.GENERA PURPOSE.C184T17DB39B





Product Information Packet: Model No: G130004.00, Catalog No:G130004.00 OBSOLETE - REPLACED BY 131520.00 - 5HP..1760RPM.184.DP./V.3PH.60HZ.CONT.NOT.40C.1.15SF.RIGID.GENERAL PURPOSE.C184T17DB39B


Nameplate Specifications

Output HP	5 Hp	Output KW	3.7 kW	
Frequency	60 Hz	Voltage	208-230/460 V	
Current	14.0-13.2/6.6 A	Speed	1760 rpm	
Service Factor	1.15	Phase	3	
Efficiency	87.5 %	Power Factor	81	
Duty	Continuous	Insulation Class	F	
Design Code	В	KVA Code	J	
Frame	184T	Enclosure	Drip Proof	
Thermal Protection	No Protection	Ambient Temperature	40 °C	
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205	
UL	Recognized	CSA	Y	
CE	Y	IP Code	22	
Number of Speeds	1			

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	3.17 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	т	Assembly/Box Mounting	F1 ONLY
Connection Drawing	005010.01	Outline Drawing	035464-950

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:07/18/2022

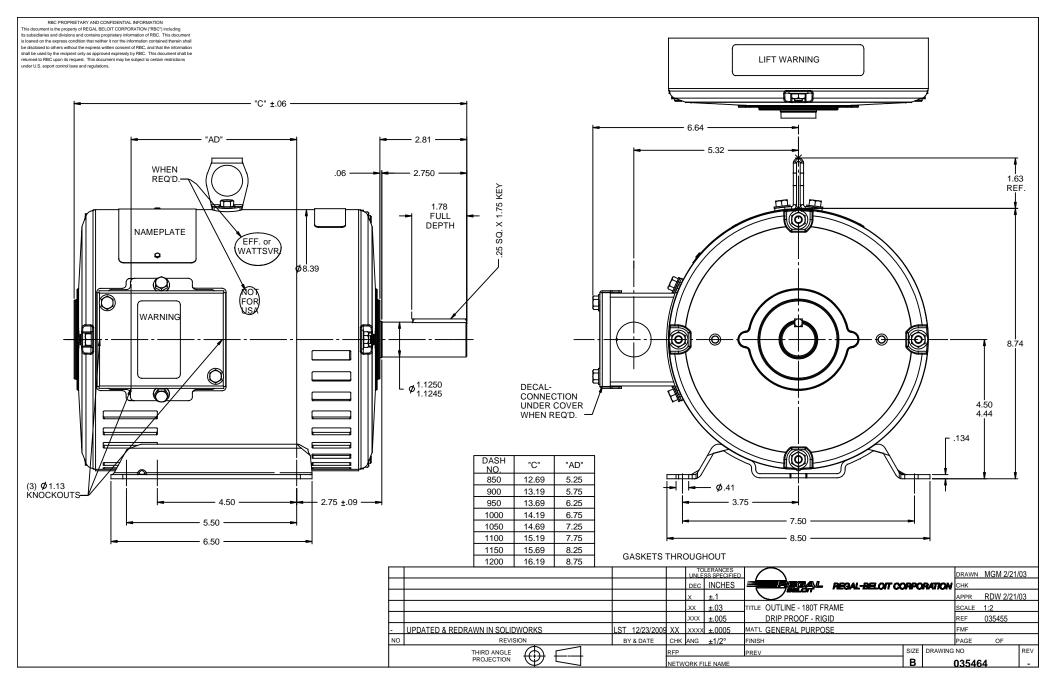

Uncontrolled Copy

