PRODUCT INFORMATION PACKET



Model No: G131779.00 Catalog No: G131779.00

BSOLETE REPLACED BY 132426.00 - ..5HP..3500RPM.182TC.DP.230/460V.3PH.60HZ.CONTINUOUS.40C.1.15 S.F.

.C FACE.C182T34DC11A.....



Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E






Nameplate Specifications

Phase	3	Output HP	5 & 3 Hp
Output KW	3.7 & 2.2 kW	Voltage	230/460 & 190/380 V
Speed	3500 & 2920 rpm	Service Factor	1.15 & 1.15
Frame	182TC	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	85.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	12.2/6.1 & 9.4/4.7 A	Power Factor	90
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	J
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205
UL	Recognized	CSA	Υ
CE	Υ	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Resistance Main	2.74 Ohms	Mounting	Round
Drive End Bearing	Ball	Opp Drive End Bearing	Ball
Frame Material	Rolled Steel	Shaft Type	Т
Assembly/Box Mounting	VERIFY		
Outline Drawing	035344-900	Connection Drawing	005010.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

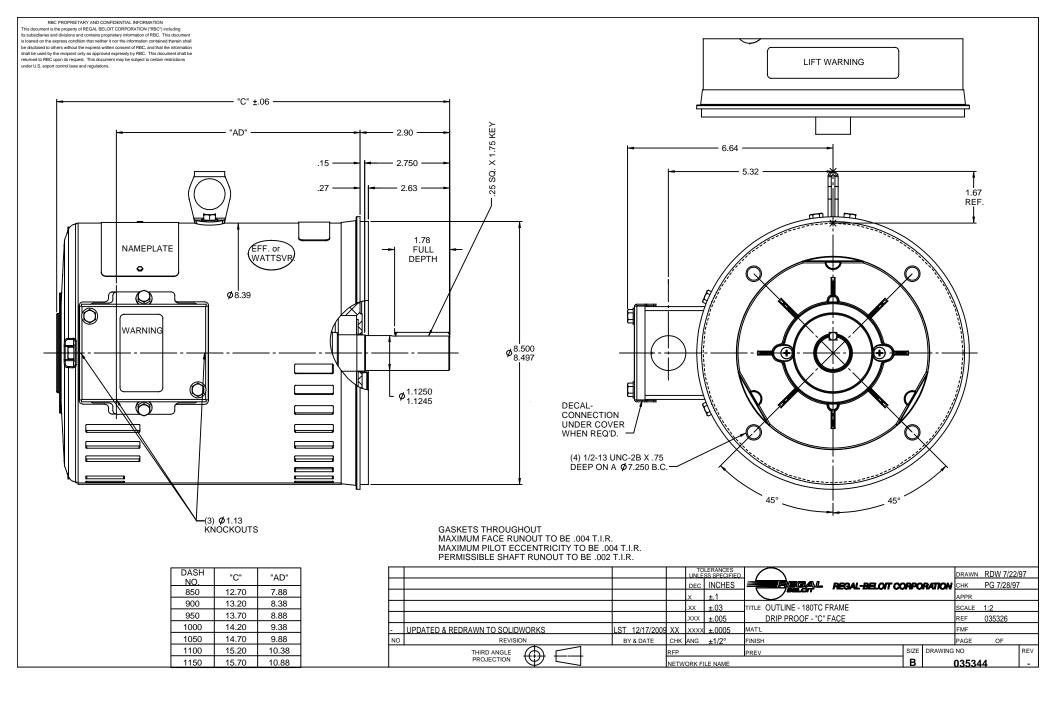

Uncontrolled Copy

