
PRODUCT INFORMATION PACKET



Model No: G140535.00 Catalog No: G140535.00 Obsolete, ced by 141232.00 -..5HP..1170RPM.215TC.TEFC.230/460V.3PH.60HZ.CONT.40C.1.15SF.C FACE.C215T11FC3A.....





Product Information Packet: Model No: G140535.00, Catalog No:G140535.00 Obsolete, replaced by 141232.00 - ..5HP..1170RPM.215TC.TEFC.230/460V.3PH.60HZ.CONT.40C.1.15SF.C FACE.C215T11FC3A.....




Nameplate Specifications

3	Output HP	5 & 3 Hp
3.7 & 2.2 kW	Voltage	230/460 & 190/380 V
1170 & 975 rpm	Service Factor	1.15 & 1.15
215TC	Enclosure	Totally Enclosed Fan Cooled
No Protection	Efficiency	87.5 %
40 °C	Frequency	60 & 50 Hz
19.6/9.8 & 16.8/8.4 A	Power Factor	55
Continuous	Insulation Class	F
В	KVA Code	J
6207	Opp Drive End Bearing Size	6206
Recognized	CSA	Y
Y	IP Code	43
1		
	3.7 & 2.2 kW 1170 & 975 rpm 215TC No Protection 40 °C 19.6/9.8 & 16.8/8.4 A Continuous B 6207 Recognized	3.7 & 2.2 kWVoltage1170 & 975 rpmService Factor215TCEnclosureNo ProtectionEfficiency40 °CFrequency19.6/9.8 & 16.8/8.4 APower FactorContinuousInsulation ClassBKVA Code6207Opp Drive End Bearing SizeRecognizedCSA

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	6	Rotation	Reversible
Resistance Main	1.464 Ohms	Mounting	Round
Drive End Bearing	Ball	Opp Drive End Bearing	Ball
Frame Material	Rolled Steel	Shaft Type	Т
Assembly/Box Mounting	VERIFY		
Outline Drawing	037614-1150	Connection Drawing	005010.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

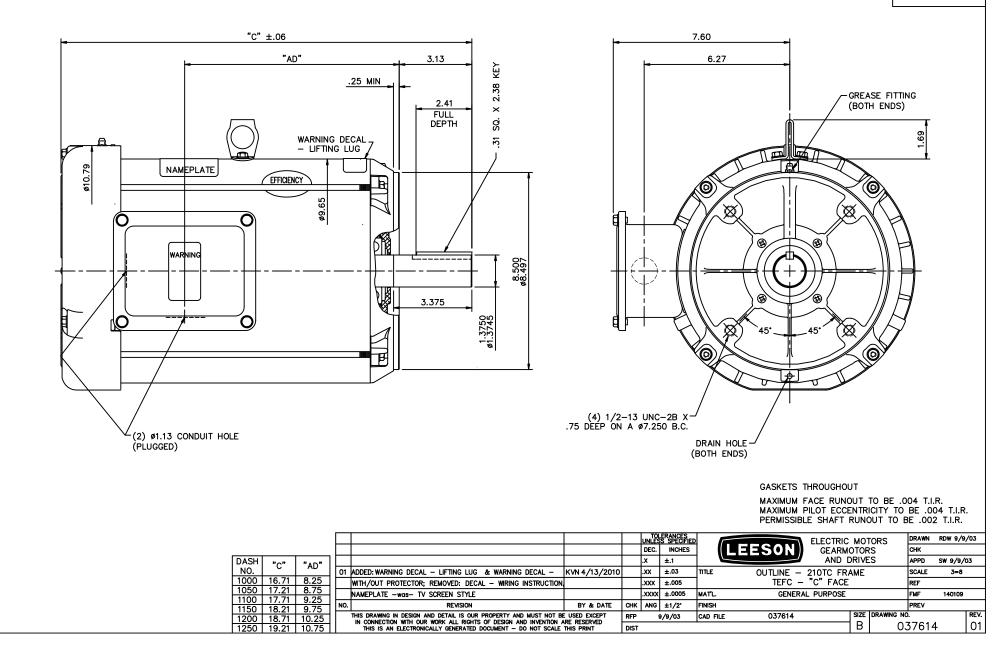

Uncontrolled Copy

