PRODUCT INFORMATION PACKET



Model No: G150157.60 Catalog No: G150157.60

BSOLETE - REPLACED BY 170157.60 - 7.5HP..1760/1470RPM.213.TEFC.208-230/460V.3PH.60/50HZ.CONT.NOT.4

0C.1.15/1.15SF.RIGID.GENERAL PURPOSE.C213T17FB45C






Nameplate Specifications

3	Output HP	7.50 & 5 Hp
5.6 & 3.7 kW	Voltage	208-230/460 & 190/380 V
1760 & 1470 rpm	Service Factor	1.25 & 1.15
213T	Enclosure	Totally Enclosed Fan Cooled
No Protection	Efficiency	89.5 & 89.5 %
40 °C	Frequency	60 & 50 Hz
20.4-19.2/9.6 & 16.0/8.0 A	Power Factor	82
Continuous	Insulation Class	F
В	KVA Code	Н
6308	Opp Drive End Bearing Size	6306
Recognized	CSA	Υ
Υ	IP Code	43
1		
	5.6 & 3.7 kW 1760 & 1470 rpm 213T No Protection 40 °C 20.4-19.2/9.6 & 16.0/8.0 A Continuous B 6308 Recognized	5.6 & 3.7 kW 1760 & 1470 rpm Service Factor 213T Enclosure No Protection Efficiency 40 °C Frequency 20.4-19.2/9.6 & 16.0/8.0 A Power Factor Continuous Insulation Class B KVA Code 6308 Opp Drive End Bearing Size Recognized CSA

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	.399 Ohms	Mounting	Rigid Base
Motor Orientation	Nan	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Assembly/Box Mounting	NAN
Outline Drawing	16953560	Connection Drawing	005010.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

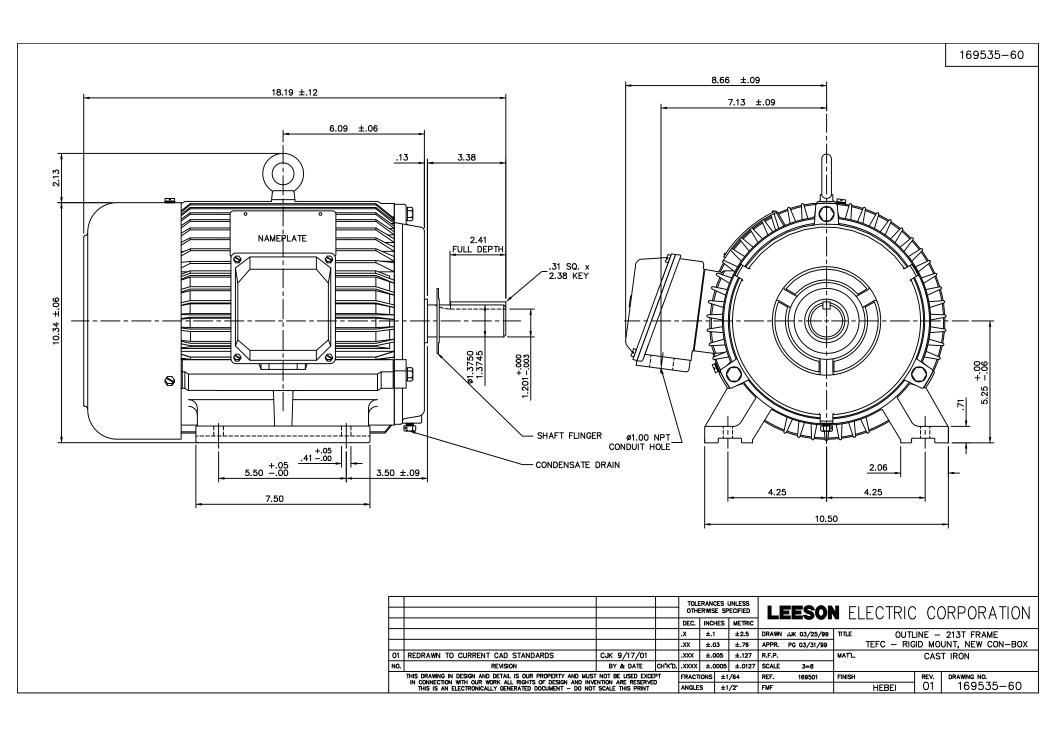

Uncontrolled Copy

