PRODUCT INFORMATION PACKET



Model No: G151542.60 Catalog No: G151542.60 Obsolete in the US,

65.60 - .30HP..1775RPM.286TZ.DP.230/460V.3PH.60HZ.CONT.40C.1.15SF.RIGID.C286T17DB12.....W/RODENT SCF






Nameplate Specifications

| Phase | 3 | Output HP | 30 & 20 Hp |
|------------------------|------------------------|----------------------------|-------------------------|
| Output KW | 22.4 & 15.0 kW | Voltage | 208-230/460 & 190/380 V |
| Speed | 1775 & 1475 rpm | Service Factor | 1.15 & 1.15 |
| Frame | 286T | Enclosure | Drip Proof |
| Thermal Protection | No Protection | Efficiency | 92.4 & 91.7 % |
| Ambient Temperature | 40 °C | Frequency | 60 & 50 Hz |
| Current | 77-72/36 & 72.0/36.0 A | Power Factor | 84.4 |
| Duty | Continuous | Insulation Class | F |
| Design Code | В | KVA Code | G |
| Drive End Bearing Size | 6312 | Opp Drive End Bearing Size | 6311 |
| UL | Recognized | CSA | Υ |
| CE | Υ | IP Code | 23 |
| Number of Speeds | 1 | | |

Technical Specifications

| Electrical Type | cal Type Squirrel Cage Induction Run Sta | | Across The Line | | |
|-----------------------|--|-----------------------|-----------------|--|--|
| Poles | 4 | Rotation | Reversible | | |
| Resistance Main | .0618 Ohms | Mounting | Rigid Base | | |
| Motor Orientation | Horizontal | Drive End Bearing | Ball | | |
| Opp Drive End Bearing | Ball | Frame Material | Cast Iron | | |
| Shaft Type | Т | Assembly/Box Mounting | F1/F2 CAPABLE | | |
| Outline Drawing | SS622280 | Connection Drawing | 004172.01 | | |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

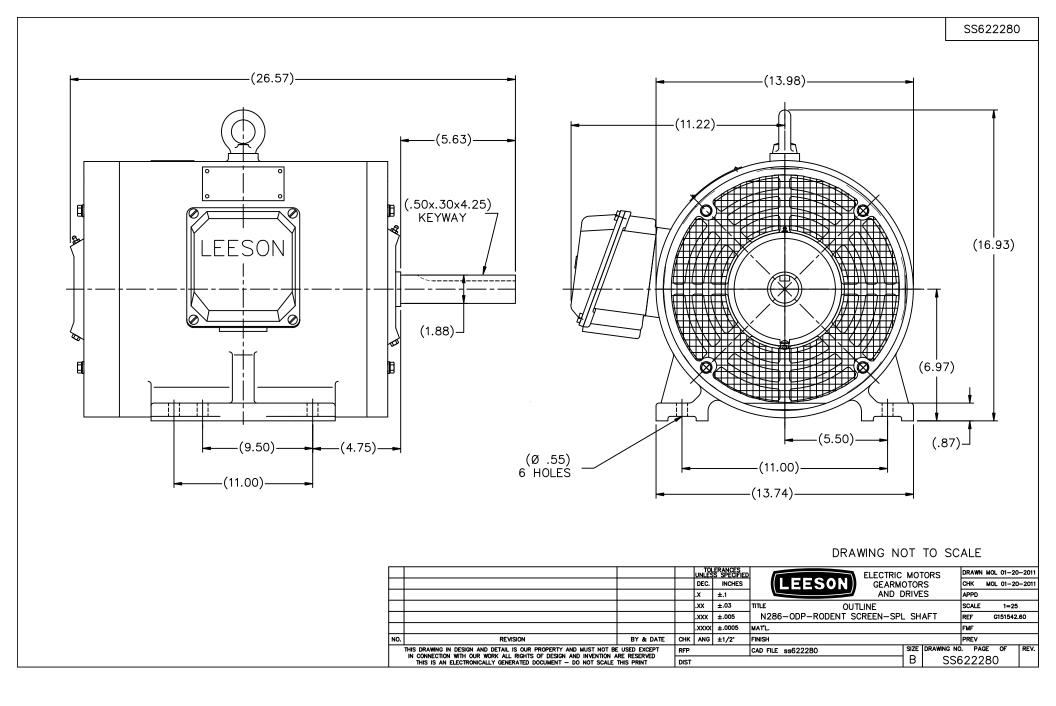

DRAWN WLW 09/08/77 CHK RPB 09/12/77

JCW 09/12/77

1=1

REV.

03


APPD

SCALE


REF FMF PREV

004172 - 01

WYE - DELTA STARTING USEABLE ON 2,4 AND 6 POLE MOTORS.

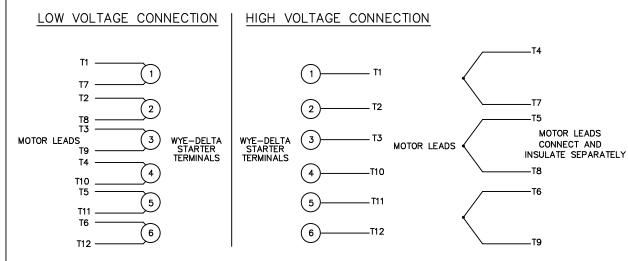

REFER TO THE WYE-DELTA STARTER CONNECTION INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

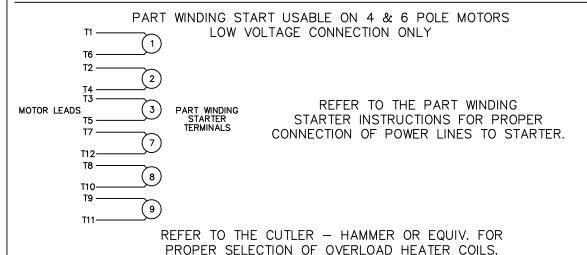

IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED

THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

| | | | | UNLES | ERANCES S SPECIFIED | | | ELECTRIC | МОТ | ORS | DF |
|-----|---|--------------|-----|-------|---------------------|----------|-------------|-----------------|------|------------|----|
| | | | | DEC. | INCHES | | 11250 | GEARMO | | | CH |
| | | | | .x | ±.1 | | | AND D | RIVE | :S | AF |
| 03 | REV'D LOW VOLTAGE CONN. LEADS PER ELEC. | BJB 06/07/00 | | .xx | ±.01 | TITLE | DELTA - WYE | CONNECTION | DIA | GRAM | s |
| 02 | ADDED T-STAT. NOTES PER ELECTRICAL | KMM 06/02/98 | | .xxx | ±.005 | | | | | | RE |
| 01 | REDRAWN TO CAD | DBT 06/02/97 | | .xxxx | ±.0005 | MAT'L. | | | | | FN |
| NO. | REVISION | BY & DATE | СНК | ANG | ±1/2° | FINISH | | | | | PI |
| | THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT | | | | | CAD FILE | 0041720 | 1 | SIZE | DRAWING NO |). |

DIST

T12 T1

T6 THERMOSTAT OPTIONAL

T3

T11 T8

T5 T2

ROTATION CAN BE REVERSED BY INTERCHANGING ANY TWO LINE LEADS

RED LEADS OR P1, P2, FOR N/C THERMOSTAT

| ACROSS THE LINE START & RUN | | | | | | |
|-----------------------------|-----------------|-----------------|-----------------|-------------------------------|--|--|
| | LINE 1 | LINE 2 | LINE 3 | JOIN & INSULATE SEPARATELY | | |
| HIGH VOLT | T1,T12 | T2,T10 | T3,T11 | (T4,T7) (T5,T8) (T6,T9) | | |
| LOW VOLT | T1,T6 T7,T12 | T2,T4 T8,T10 | T3,T5 T9,T11 | | | |