PRODUCT INFORMATION PACKET



Model No: G151684.60 Catalog No: G151684.60

Obsolete,

replaced by 171684.60 -..20HP..1800RPM.256TC.ODP.230/460V.3PH.60HZ.CONT.40C..C-FACE.....






Nameplate Specifications

Phase	3	Output HP	20 & 15 Hp
Output KW	14.9 & 11.2 kW	Voltage	208-230/460 & 190/380 V
Speed	1765 & 1469 rpm	Service Factor	1.15 & 1.15
Frame	256TC	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	91.7 & 91 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	52-48/24 & 44/22 A	Power Factor	85
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6208
UL	Recognized	CSA	Υ
CE	Υ	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line				
Poles	4	Rotation	Reversible				
Resistance Main	.413 Ohms	Mounting	Round				
Motor Orientation	Horizontal	Drive End Bearing	Ball				
Opp Drive End Bearing	Ball	Frame Material	Cast Iron				
Shaft Type	Т	Assembly/Box Mounting	F1/F2 CAPABLE				
Outline Drawing	SS622037LE	Connection Drawing	004172.01				

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

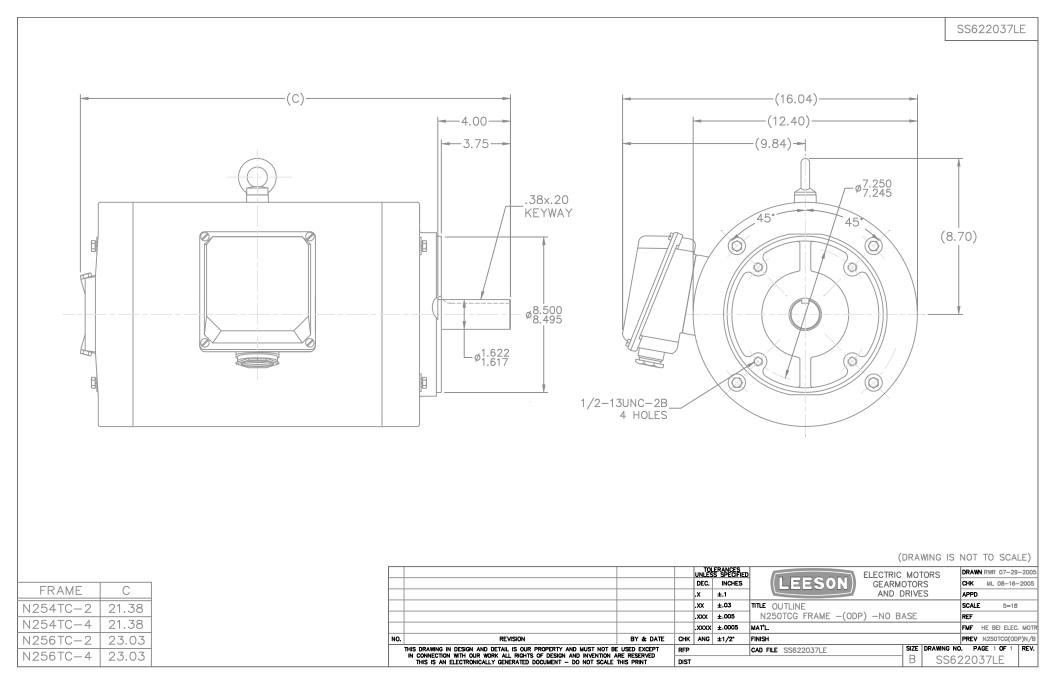

DRAWN WLW 09/08/77 CHK RPB 09/12/77

JCW 09/12/77

1=1

REV.

03


APPD

SCALE


REF FMF PREV

004172 - 01

WYE - DELTA STARTING USEABLE ON 2,4 AND 6 POLE MOTORS.

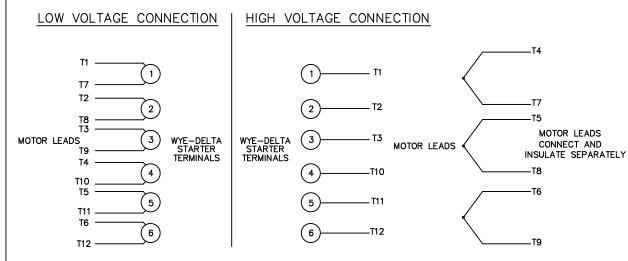

REFER TO THE WYE-DELTA STARTER CONNECTION INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

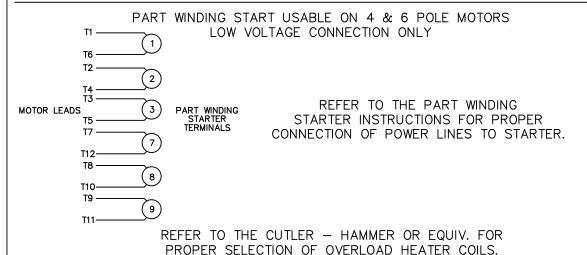

IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED

THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

				UNLES	ERANCES S SPECIFIED			ELECTRIC	МОТ	ORS	DF
				DEC.	INCHES		11250	GEARMO			CH
				.x	±.1			AND D	RIVE	:S	AF
03	REV'D LOW VOLTAGE CONN. LEADS PER ELEC.	BJB 06/07/00		.xx	±.01	TITLE	DELTA - WYE	CONNECTION	DIA	GRAM	s
02	ADDED T-STAT. NOTES PER ELECTRICAL	KMM 06/02/98		.xxx	±.005						RE
01	REDRAWN TO CAD	DBT 06/02/97		.xxxx	±.0005	MAT'L.					FN
NO.	REVISION	BY & DATE	СНК	ANG	±1/2°	FINISH					PI
	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT					CAD FILE	0041720	1	SIZE	DRAWING NO).

DIST

T12 T1

T6 THERMOSTAT OPTIONAL

T3

T11 T8

T5 T2

ROTATION CAN BE REVERSED BY INTERCHANGING ANY TWO LINE LEADS

RED LEADS OR P1, P2, FOR N/C THERMOSTAT

ACROSS THE LINE START & RUN						
	LINE 1	LINE 2	LINE 3	JOIN & INSULATE SEPARATELY		
HIGH VOLT	T1,T12	T2,T10	T3,T11	(T4,T7) (T5,T8) (T6,T9)		
LOW VOLT	T1,T6 T7,T12	T2,T4 T8,T10	T3,T5 T9,T11			