## PRODUCT INFORMATION PACKET



Model No: G151349.60 Catalog No: G151349.60 Obsolete in the US,

aced by 171349.60 - 15HP..3520RPM.215.TEFC.230/460V.3PH.60HZ.CONT.NOT.40C.1.15SF.C FACE..C215T34FC4






## Nameplate Specifications

Phase	3	Output HP	15 & 10 Hp
Output KW	11.2 & 7.5 kW	Voltage	208-230/460 & 190/380 V
Speed	3520 & 2930 rpm	Service Factor	1.15 & 1.15
Frame	215TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	90.2 & 90.2 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	38.3-35/17.5 & 29/14.5 A	Power Factor	89
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6308	Opp Drive End Bearing Size	6306
UL	Recognized	CSA	Υ
CE	Υ	IP Code	43
Number of Speeds	1		

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	2	Rotation	Reversible
Resistance Main	.155 Ohms	Mounting	Round
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Assembly/Box Mounting	F1/F2 CAPABLE
Inverter Load	CONSTANT 2:1		
Outline Drawing	16957760	Connection Drawing	005010.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

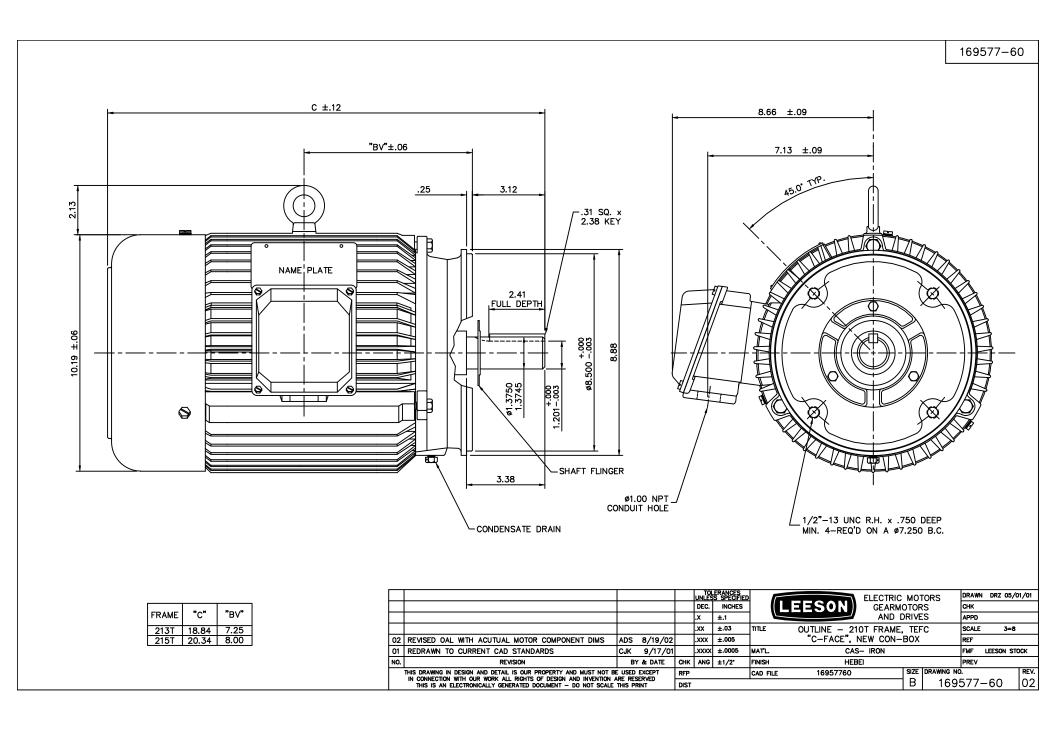

ERROR: undefined

OFFENDING COMMAND: currentdic

STACK:

-dictionary-/Pscript\_WinNT\_Compat -dictionary-

## Uncontrolled Copy

