

PRODUCT INFORMATION PACKET



Model No: G151529.60

Catalog No: G151529.60

OBSOLETE REPLACED BY 171529.60 - ..300HP..1800RPM.449T.TEFC.460V.3PH.60HZ.CONT.40C..RIGID.....

....

Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E





Nameplate Specifications


Phase	3	Output HP	300 & 250 Hp
Output KW	224.0 & 187.0 kW	Voltage	460 & 380 V
Speed	1785 & 1485 rpm	Service Factor	1.15 & 1.15
Frame	447/449T	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	95.8 & 95.4 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	330 & 340 A	Power Factor	89
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	G
Drive End Bearing Size	6319	Opp Drive End Bearing Size	6317
UL	Recognized	CSA	Y
CE	Y	IP Code	43
Number of Speeds	1		

Technical Specifications


Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Wye Start Delta Run Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.006 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	T	Assembly/Box Mounting	F1/F2 CAPABLE
Inverter Load	CONSTANT 10:1		
Outline Drawing	SS622242	Connection Drawing	005190.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

SS622242

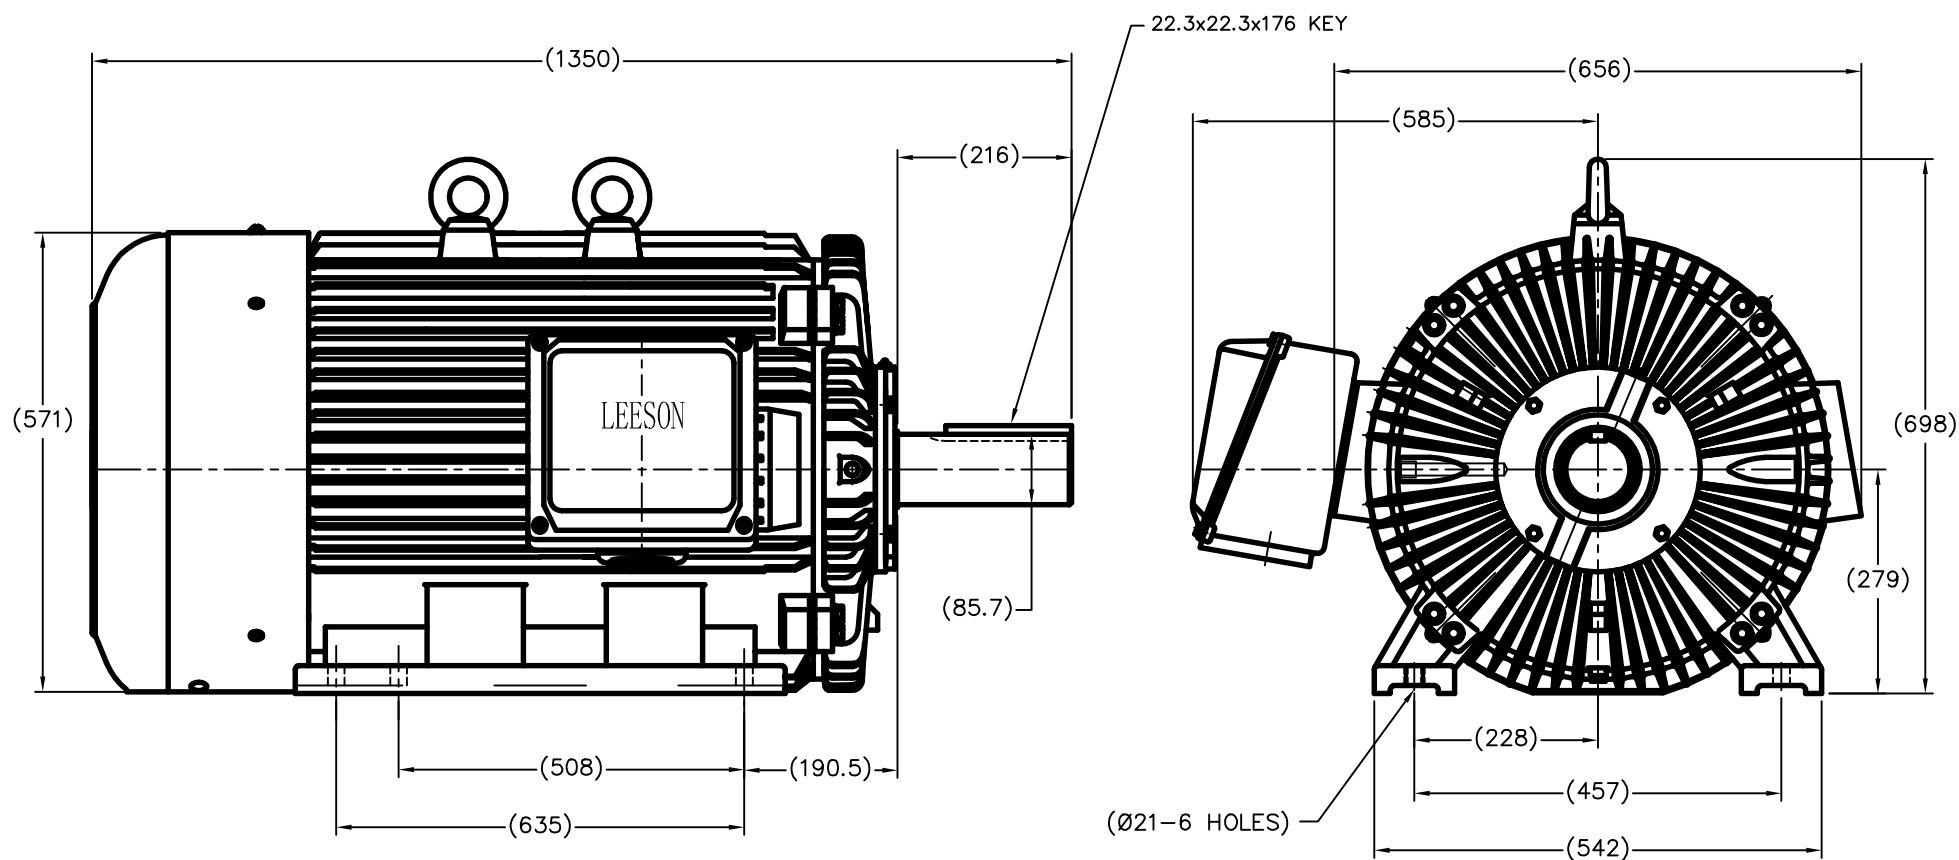

DRAWING NOT TO SCALE

TOLERANCES UNLESS SPECIFIED		DEC. INCHES		 REGAL-BELOIT CORPORATION	DRAWN MOL 11-16-2010	
NO.	REVISION	BY & DATE	CHK	ANG	CHK	MOL 11-16-2010
					APPD	
					SCALE	1=6
					REF	170625.60
					FMF	
					PREV	170624.60
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT				RFP	CAD FILE SS622242	SIZE B
				DIST		DRAWING NO. SS622242
						PAGE OF
						REV.



C	T1	U1
C	T2	V1
C	T3	W1
C	T4	U2
C	T5	V2
C	T6	W2



	L1	L2	L3	JOIN
START (WYE)	T1 U1	T2 V1	T3 U2	(T4,T5,T6) (U2,V2,W2)
RUN (DELTA)	(T1,T6) (U1,W2)	(T2,T4) (V1,U2)	(T3,T5) (W1,V2)	

				TOLERANCES UNLESS OTHERWISE SPECIFIED		<div>LEESON ELECTRIC CORPORATION</div>			
04	ADDED MAT'L (CWLE) PER ECO-0168542	DS	6/10/2019	DECIMALS					
03	ADDED IEC DESIGNATIONS	MOL	4/27/2012	.00	± .01	DRAWN PG 05/07/82	EXT. WIRING DIAGRAM STAR START – DELTA RUN		
02	REMOVED OBSOLETE STATUS	KJH	6/28/99	.000	± .005	CH'K'D. TEM			
01	REDRAWN ON CAD	DBT	05/30/97	.0000	± .0005	APPR. 05/07/82	MAT'L. Y-CONNECTED START (CWLE) DELTA CONNECTED RUN – SINGLE VOLTAGE		
NO.	REVISION	BY	DATE	FRACTIONS	± 1/64	SCALE 1=1			
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED				ANGLES	± 1/2°	REF. T2E	FINISH	SIZE A	DRAWING NO. 005190-01
				INCH/MM		FMF ELECTRO POWER			