## PRODUCT INFORMATION PACKET



Model No: G151741.60 Catalog No: G151741.60

Obsolete,

replaced by 199095.00 -.5HP..1725RPM.N184JP.TEFC.230/460V.3PH.60HZ.CONT.NOT.40C.1.15SF.RIGID.PUMP.






## Nameplate Specifications

3	Output HP	5 & 3 Hp
3.7 & 2.2 kW	Voltage	208-230/460 & 190/380 V
1755 & 1465 rpm	Service Factor	1.15 & 1.15
184JP	Enclosure	Totally Enclosed Fan Cooled
No Protection	Efficiency	87.5 & 86.5 %
40 °C	Frequency	60 & 50 Hz
14.4-13.8/6.9 & 11.2/5.6 A	Power Factor	77.7
Continuous	Insulation Class	F
В	KVA Code	J
6207	Opp Drive End Bearing Size	6205
Recognized	CSA	Υ
Υ	IP Code	55
1		
	3.7 & 2.2 kW  1755 & 1465 rpm  184JP  No Protection  40 °C  14.4-13.8/6.9 & 11.2/5.6 A  Continuous  B  6207  Recognized	3.7 & 2.2 kW  1755 & 1465 rpm  Service Factor  184JP  Enclosure  No Protection  Efficiency  40 °C  Frequency  14.4-13.8/6.9 & 11.2/5.6 A  Power Factor  Continuous  Insulation Class  B  KVA Code  6207  Opp Drive End Bearing Size  Recognized  CSA

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.754 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	JP	Assembly/Box Mounting	F2/F1 CAPABLE
Inverter Load	CONSTANT 10:1		
Outline Drawing	SS622301	Connection Drawing	00501001

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

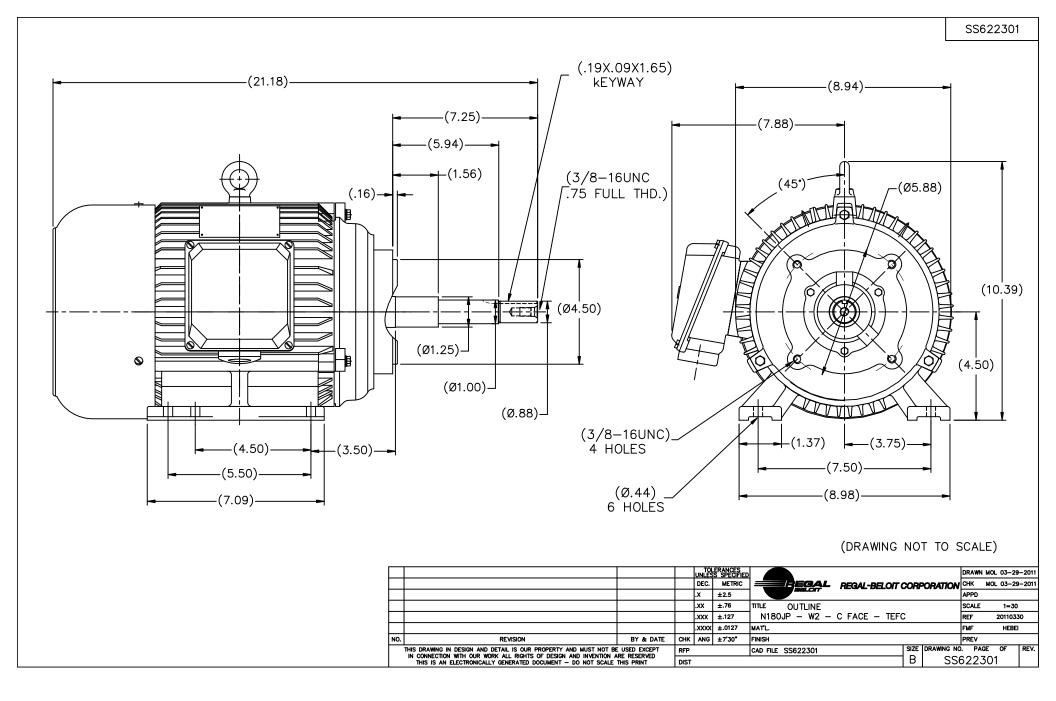

## Uncontrolled Copy

