PRODUCT INFORMATION PACKET



Model No: KS10P520A40W44XSX Catalog No: AL08D4040MFAFTOAOO

10.5 Kw, Crane Duty Slipring Motors, 3 phase, 8 Pole, 415 V, S4 Duty, KS200L1 Frame, 40 CDF,

300 Start/Hr., TEFC





Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E




Nameplate Specifications

| Output HP | 14 Hp | Output KW | 10.5 kW |
|-------------------------------|---------------|----------------------------|-----------------------------|
| Frequency | 50 Hz | Voltage | 415 V |
| Current | 27.7 A | Speed | 731 rpm |
| Phase | 3 | Duty | S4 |
| Frame | KS200L1 | Enclosure | Totally Enclosed Fan Cooled |
| Thermal Protection | No Protection | Ambient Temperature | 45 °C |
| Drive End Bearing Size | 6312 | Opp Drive End Bearing Size | 6312 |
| UL | No | CSA | No |
| CE | No | IP Code | 55 |
| CDF | 40 % | Start/Hr | 300 |
| RA | 25 A | RV | 255 V |
| Insulation class Stator/Rotor | F/F | Temp. Rise Stator/Rotor | 75/75 K |
| Stator Connection | Delta | Rotor Connection | Star |
| Efficiency Class | Standard | | |

Technical Specifications

| Electrical Type | Slipring | Starting Method | Rotor resistance starter |
|-----------------------|-----------------|-----------------------|--------------------------|
| Rotation | Bi-Directional | Mounting | IMB3 |
| Motor Orientation | Horizontal | Drive End Bearing | Antifriction |
| Opp Drive End Bearing | Antifriction | Frame Material | Cast Iron/Fabricated |
| Shaft Type | Single Cylinder | Overall Length | 947.00 mm |
| Frame Length | 947.00 mm | Shaft Diameter | 55.000 mm |
| Shaft Extension | 110 mm | Assembly/Box Mounting | Тор |
| Rotor GD2 | 2.17 kg·m² | Pull Out Torque | 3.9 |
| Outline Drawing | CM1383 | Connection Drawing | DP2253 |
| | | | |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:03/06/2023

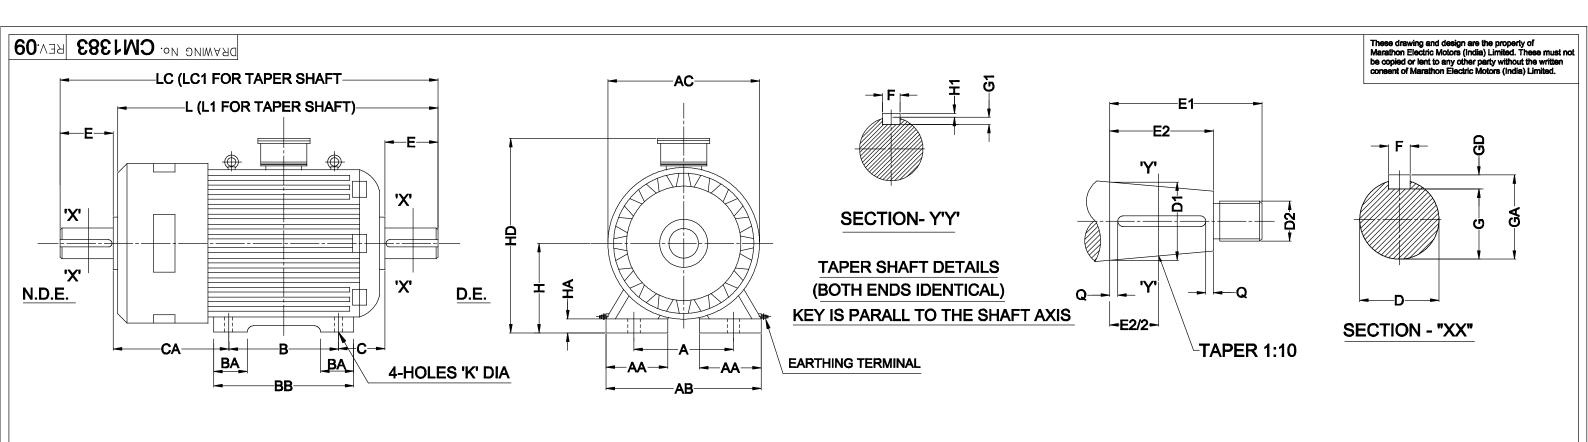

| | FRAME | POLE | D(SHA | FT DIA) | E | GA | ı | F | G | D | G | ; | Н | | FIX | NG DI | MENSI | ONS | V | ша | 40 | ПΡ | 40 | | DD. | D4 | | | L1 | LC1 | TAPI | ER SHAF | T DIME | NSION | IS DET | TAILS (I | вотн) | |
|-----|--------|------|-------|----------------|-----|------|------|-----------|------|-----------|------|---------|------|------------|-----|-------|-------|-----|----------|----|------------------|-----|-----|----|--------------------------|------|-----|-------|------------------|-------|------|---------|--------|-----------------|--------|----------|-------|---|
| NO. | | | NOM. | TOL. | | | NOM. | TOL. | NOM. | TOL. | NOM. | TOL. | NOM. | TOL. | Α | В | С | CA | ^ | НА | AC | HD | AB | AA | BB | ВА | | LC | L'I | 101 | D1 | D2 | E1 | E2 | F1 | H1 | G1 | Q |
| 1 | KS112M | 4-8 | 28 | +.009 004 | 60 | 31 | 8 | +0 036 | 7 | +0 090 | 24 | +0 2 | 112 | +0 -0.5 | 190 | 140 | 70 | 345 | 12 | 15 | 252 | 330 | 226 | 45 | 170 | 50 | 610 | 672.5 | 610 | 672.5 | T28 | M16x1.5 | 60 | 42 | 5 | 5 | 3 | 3 |
| 2 | KS132M | 4-8 | 38 | +.018 +.002 | 80 | 41 | 10 | +0 | 8 | +0 090 | 33 | +0 2 | 132 | +0 -0.5 | 216 | 178 | 89 | 358 | 12 | 15 | 300 | 380 | 260 | 55 | 220 | 55 | 700 | 785 | 700 | 785 | T38 | M20x1.5 | 80 | 54 | 8 | 7 | 4 | 5 |
| 3 | KS160M | 4-8 | 42 | +.018 +.002 | 110 | 45 | 12 | +0 043 | 8 | +0 090 | 37 | +0 2 | 160 | +0 -0.5 | 254 | 210 | 108 | 347 | 15 | 20 | 350 | 440 | 305 | 55 | 305 | 92.5 | 815 | 932 | 815 | 932 | T42 | M24x2 | 110 | 82 [©] | 10 | 8 | 5 | 5 |
| 4 | KS160L | 4-8 | 42 | +.018 +.002 | 110 | 45 | 12 | +0 043 | 8 | +0 090 | 37 | +0 2 | 160 | +0 -0.5 | 254 | 254 | 108 | 347 | 15 | 20 | 350 | 440 | 305 | 55 | 305 | 92.5 | 815 | 932 | 815 | 932 | T42 | M24x2 | 110 | 82 [@] | 10 | 8 | 5 | 5 |
| 5 | KS180L | 4-8 | 48 | +.018 +.002 | 110 | 51.5 | 14 | +0 043 | 9 | +0 090 | 42.5 | +0 2 | 180 | +0 -0.5 | 279 | 279 | 121 | 370 | 15 | 21 | 445 | 490 | 340 | 75 | 340 ^{@4} | 85 | 875 | 990 | 875 | 990 | T48 | M30x2 | 110 | 82 | 12 | 8 | 5 | 5 |
| 6 | KS200L | 4-8 | 55 | +.030 +.011 | 110 | 59 | 16 | +0 052 | 10 | +0 090 | 49 | +0 2 | 200 | +0 -0.5 | 318 | 305 | 133 | 399 | 19 | 25 | 450 [©] | 545 | 400 | 89 | 365 | 95 | 947 | 1057 | 947 [©] | 1057 | T55 | M36x3 | 110 | 82 | 14 | 9 | 5.5 | 5 |
| · | | | | | | | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | • |

| 09 | 14.04.14 | 'E2' Dimension for Pt.No. 3 & 4 Changed to 82 was 87 | | | | | | | | |
|----------|----------|---|---------|--------|-----------|---------------|--------|--------------------------------|----|---------|
| 08 | 07.07.11 | Unification of KS160 M&L Frame | | | | | | | | |
| 07 | 06.06.11 | EARTHING TERMINAL INCORPORATED | | | | | | | | ALL DII |
| 06 | 19.07.10 | 'G' Dimn. for Pt.1 Changed to 24mm. was 27mm. | | | 1(1) | marat | hon' | Marathon Elec | | |
| 05 | 14.12.07 | COMPANY NAME AND LOGO CHANGED | | | | gal Beloit Co | | | | |
| 04 | 05.05.06 | 'BB' Dimension for KS180 Frame was 394 mm. 'AC' Dimension for KS200 Frame was 494 mm. 'L' & 'L1' Dimension for KS20 Frame was 942 mm. | | | TITLE | OUTLINE | DIME | NSION DRAWI | | |
| 03 | 11.09.04 | DRAWING GENERALLY REVISED | | | | | | (KRANE MOT | JR | .) |
| В | 10.11.97 | 'L' & 'L1' DIM. ALTERED (OLD 704) FOR PT.2 | B.B. | S.B. | DRAWN B | B.BISWAS | 23 | 3.07.96 | T | DR/ |
| А | 19.04.97 | 'G' FOR PART 3 & 4 CHANGED | B.B. | S.B. | | S.BHOWMICK | | 3.07.96 | | |
| REVISION | DATE | DETAIL OF REVISION | DONE BY | APPRVD | APPRVD. R | + | SIGN D | 3.07.96 SCALE IF ANY ATE N.T.S | (| CM |