## **PRODUCT INFORMATION PACKET**

Model No: KS17P020A40V35XSX Catalog No: AL08D4030MFAFTOAOO 17.0 Kw, Crane Duty Slipring Motors, 3 phase, 6 Pole, 415 V, S5 Duty, KS200L1 Frame, 40 CDF, 150 Start/Hr., TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



marathon<sup>®</sup>

Motors



Product Information Packet: Model No: KS17P020A40V35XSX, Catalog No:AL08D4030MFAFTOAOO 17.0 Kw, Crane Duty Slipring Motors, 3 phase, 6 Pole, 415 V, S5 Duty, KS200L1 Frame, 40 CDF, 150 Start/Hr., TEFC

# marathon®


### Nameplate Specifications

| Output HP                     | 23 Нр         | Output KW                  | 17.0 kW                     |
|-------------------------------|---------------|----------------------------|-----------------------------|
| Frequency                     | 50 Hz         | Voltage                    | 415 V                       |
| Current                       | 34.0 A        | Speed                      | 972 rpm                     |
| Phase                         | 3             | Duty                       | S5                          |
| Frame                         | KS200L1       | Enclosure                  | Totally Enclosed Fan Cooled |
| Thermal Protection            | No Protection | Ambient Temperature        | 45 °C                       |
| Drive End Bearing Size        | 6312          | Opp Drive End Bearing Size | 6312                        |
| UL                            | No            | CSA                        | No                          |
| CE                            | No            | IP Code                    | 55                          |
| CDF                           | 40 %          | Start/Hr                   | 150                         |
| RA                            | 39.5 A        | RV                         | 260 V                       |
| Insulation class Stator/Rotor | F/F           | Temp. Rise Stator/Rotor    | 75/75 K                     |
| Stator Connection             | Delta         | Rotor Connection           | Star                        |
| Efficiency Class              | Standard      |                            |                             |

### **Technical Specifications**

| Electrical Type       | Slipring        | Starting Method       | Rotor resistance starter |
|-----------------------|-----------------|-----------------------|--------------------------|
| Rotation              | Bi-Directional  | Mounting              | IMB3                     |
| Motor Orientation     | Horizontal      | Drive End Bearing     | Antifriction             |
| Opp Drive End Bearing | Antifriction    | Frame Material        | Cast Iron/Fabricated     |
| Shaft Type            | Single Cylinder | Overall Length        | 947.00 mm                |
| Frame Length          | 947.00 mm       | Shaft Diameter        | 55.000 mm                |
| Shaft Extension       | 110 mm          | Assembly/Box Mounting | Тор                      |
| Rotor GD2             | 2.3 kg·m²       | Pull Out Torque       | 3.5                      |
| Outline Drawing       | CM1383          | Connection Drawing    | DP2237                   |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:03/06/2023

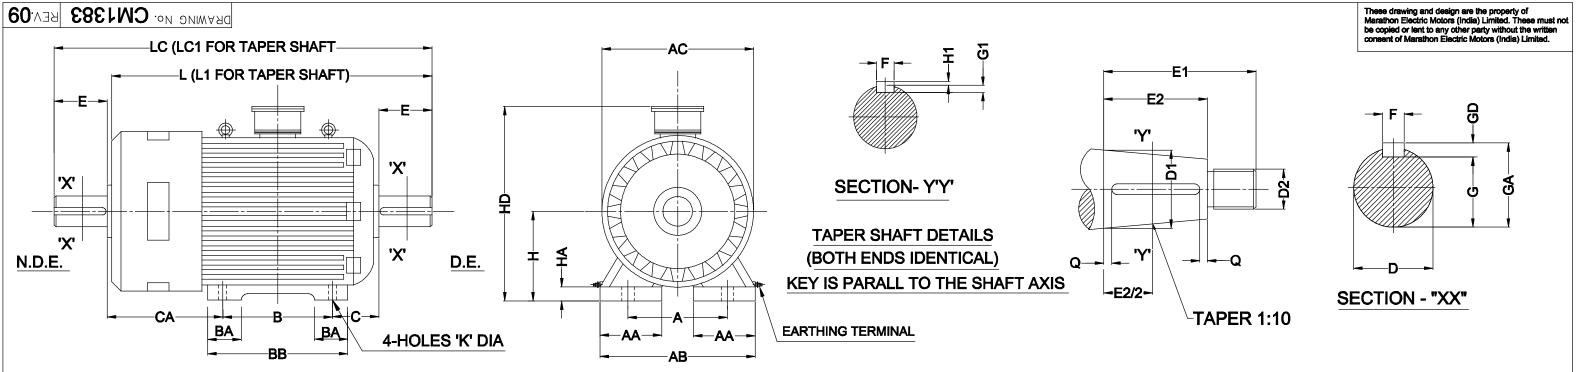

|     | FRAME  | POLE | D(SHA | FT DIA)        | Е   | GA   |      | F         | G    | D         |      | G       | н    |            | FIX |     | IENSI | ONS | K  |    |                   |     |     |    |                         |      |                  | 10    | 14                | 1.01  | TAP        | ER SHAF |     | NSION                    | IS DET | AILS (E | BOTH) |   |
|-----|--------|------|-------|----------------|-----|------|------|-----------|------|-----------|------|---------|------|------------|-----|-----|-------|-----|----|----|-------------------|-----|-----|----|-------------------------|------|------------------|-------|-------------------|-------|------------|---------|-----|--------------------------|--------|---------|-------|---|
| NO. |        |      | NOM.  | TOL.           |     |      | NOM. | TOL.      | NOM. | TOL.      | NOM. | TOL.    | NOM. | TOL.       | A   | в   | С     | CA  | r  | HA | AC                | HD  | AB  | AA | BB                      | BA   |                  | LC    | L1                | LC1   | D1         | D2      | E1  | E2                       | F1     | H1      | G1    | Q |
| 1   | KS112M | 4-8  | 28    | +.009<br>004   | 60  | 31   | 8    | +0<br>036 | 7    | +0<br>090 | 24   | +0<br>2 | 112  | +0<br>-0.5 | 190 | 140 | 70    | 345 | 12 | 15 | 252               | 330 | 226 | 45 | 170                     | 50   | 610              | 672.5 | 610               | 672.5 | T28        | M16x1.5 | 60  | 42                       | 5      | 5       | 3     | 3 |
| 2   | KS132M | 4-8  | 38    | +.018<br>+.002 | 80  | 41   | 10   | +0<br>036 | 8    | +0<br>090 | 33   | +0<br>2 | 132  | +0<br>-0.5 | 216 | 178 | 89    | 358 | 12 | 15 | 300               | 380 | 260 | 55 | 220                     | 55   | 700              | 785   | 700               | 785   | <b>T38</b> | M20x1.5 | 80  | 54                       | 8      | 7       | 4     | 5 |
| 3   | KS160M | 4-8  | 42    | +.018<br>+.002 | 110 | 45   | 12   | +0<br>043 | 8    | +0<br>090 | 37   | +0<br>2 | 160  | +0<br>-0.5 | 254 | 210 | 108   | 347 | 15 | 20 | 350               | 440 | 305 | 55 | 305                     | 92.5 | 815              | 932   | 815               | 932   | T42        | M24x2   | 110 | <b>82</b> <sup>(09</sup> | 10     | 8       | 5     | 5 |
| 4   | KS160L | 4-8  | 42    | +.018<br>+.002 | 110 | 45   | 12   | +0<br>043 | 8    | +0<br>090 | 37   | +0<br>2 | 160  | +0<br>-0.5 | 254 | 254 | 108   | 347 | 15 | 20 | 350               | 440 | 305 | 55 | 305                     | 92.5 | 815              | 932   | 815               | 932   | T42        | M24x2   | 110 | 82 <sup>09</sup>         | 10     | 8       | 5     | 5 |
| 5   | KS180L | 4-8  | 48    | +.018<br>+.002 | 110 | 51.5 | 14   | +0<br>043 | 9    | +0<br>090 | 42.5 | +0<br>2 | 180  | +0<br>-0.5 | 279 | 279 | 121   | 370 | 15 | 21 | 445               | 490 | 340 | 75 | <b>340</b> <sup>@</sup> | 85   | 875              | 990   | 875               | 990   | T48        | M30x2   | 110 | 82                       | 12     | 8       | 5     | 5 |
| 6   | KS200L | 4-8  | 55    | +.030<br>+.011 | 110 | 59   | 16   | +0<br>052 | 10   | +0<br>090 | 49   | +0<br>2 | 200  | +0<br>-0.5 | 318 | 305 | 133   | 399 | 19 | 25 | 450 <sup>69</sup> | 545 | 400 | 89 | 365                     | 95   | 947 <sup>®</sup> | 1057  | 947 <sup>03</sup> | 1057  | T55        | M36x3   | 110 | 82                       | 14     | 9       | 5.5   | 5 |

| 09     | 14.04.14 | 'E2' Dimension for Pt.No. 3 & 4 Changed to 82 was 87  |         |       |
|--------|----------|---|---------|-------|
| 08     | 07.07.11 | Unification of KS160 M&L Frame  |         |       |
| 07     | 06.06.11 | EARTHING TERMINAL INCORPORATED  |         |       |
| 06     | 19.07.10 | 'G' Dimn. for Pt.1 Changed to 24mm. was 27mm.   |         |       |
| 05     | 14.12.07 | COMPANY NAME AND LOGO CHANGED   |         |       |
| 04     | 05.05.06 | 'BB' Dimension for KS180 Frame was 394 mm.<br>'AC' Dimension for KS200 Frame was 494 mm.<br>'L' & 'L1' Dimension for KS20 Frame was 942 mm. |         |       |
| 03     | 11.09.04 | DRAWING GENERALLY REVISED   |         |       |
| В      | 10.11.97 | 'L' & 'L1' DIM. ALTERED (OLD 704) FOR PT.2  | B.B.    | S.B.  |
| А      | 19.04.97 | 'G' FOR PART 3 & 4 CHANGED  | B.B.    | S.B.  |
| VISION | DATE     | DETAIL OF REVISION  | DONE BY | APPRV |

| 32      | <b>mar</b><br>gal Bel |
|---------|-----------------------|
| TITLE   | OUTI                  |
| DRAWN   | B.BISWAS              |
| CHECKED | S.BHOWM               |
| APPRVD. | R.RANJAN              |
|         |                       |
|         |                       |



