PRODUCT INFORMATION PACKET



Model No: LM13814
Catalog No: LM13814

General Purpose Motor, 60 & 60 HP, 3 Ph, 60 & 50 Hz, 230/460 & 208/415 V, 3600 & 3000 RPM,

326TS Frame, DP





Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E




Nameplate Specifications


Phase	3	Output HP	60 & 60 Hp
Output KW	44.8 & 44.8 kW	Voltage	230/460 & 208/415 V
Speed	3550 & 2935 rpm	Service Factor	1.25 & 1.15
Frame	326TS	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	93.6 & 93 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	136/68 & 151/75.5 A	Power Factor	88.5
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	F
Drive End Bearing Size	311	Opp Drive End Bearing Size	309
UL	Recognized	CSA	Υ
CE	Υ	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Wye Start Delta Run
Poles	2	Rotation	Reversible
Resistance Main	.13 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	TS	Overall Length	25.82 in
Frame Length	16.57 in	Shaft Diameter	1.875 in
Shaft Extension	3.75 in	Assembly/Box Mounting	F1 ONLY
Outline Drawing	XG2D1SS2-1657	Connection Drawing	A-EE7308AA-LN

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

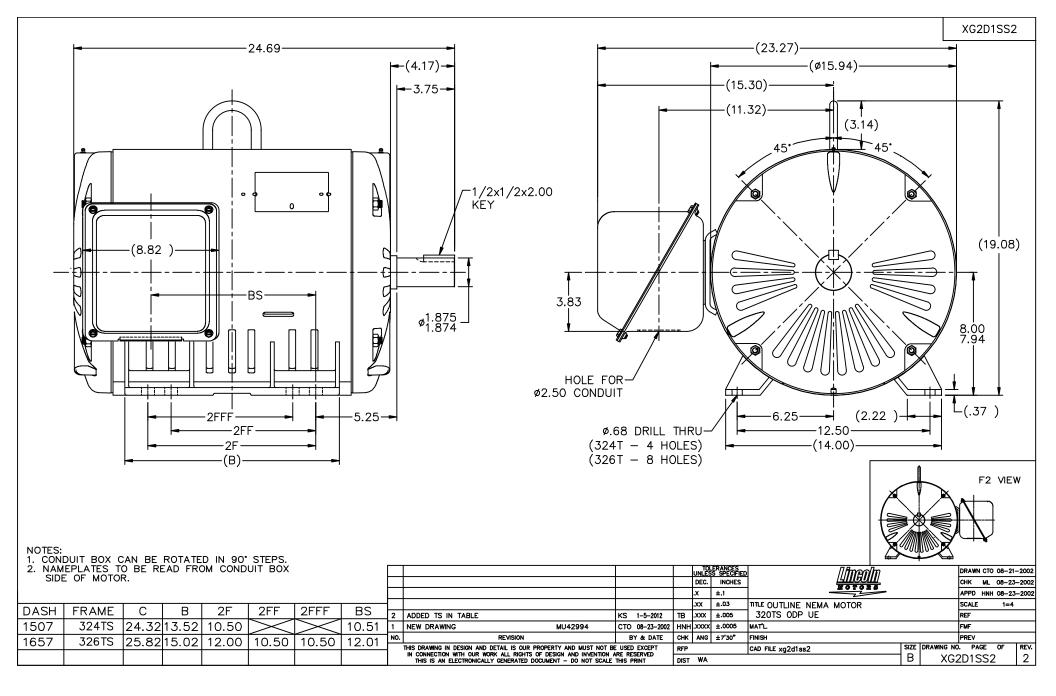

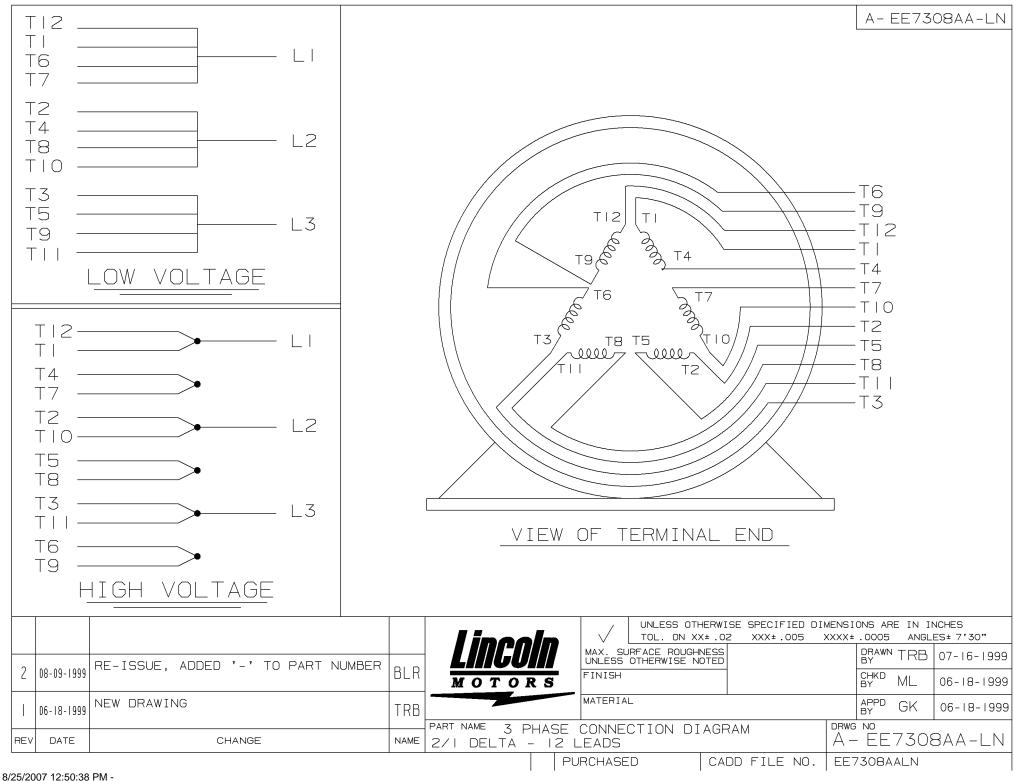

ERROR: undefined

OFFENDING COMMAND: Pscrip

STACK:



CERTIFICATION DATA SHEET

2100 WASHINGTON ST. GRAFTON, WI PH. 262-277-8810

CONN. DIAGRAM: A-EE7308AA-LN

 OUTLINE:
 XG2D1SS2-1657
 CATALOG: LM13814

 WINDING #:
 L3262008
 1
 MOUNTING:
 F1 ONLY

TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
60&60	44.8&44.8	3600	3550&2935	326TS	DP	F	В

РН	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	амв°с
3	60/50	230/460&208/415	136/68&151/75.5	WYE START DELTA RUN	CONTINUOUS	F1	1.25/1.15	40

FULL LOAD EFF:	93.6&93	3/4 LOAD EFF:	94.5	1/2 LOAD EFF:	94.5	GTD, EFF	ELEC, TYPE
FULL LOAD PF:	88.5&88.5	3/4 LOAD PF:	88.5	1/2 LOAD PF:	87.5	92.4	SQ CAGE IND RUN

F.L. TORQUE LOCKED ROTOR AMPS		LOCKED ROTOR AMPS		L.R. TORÇ	UE	B.D. TORQUE			F.L. RISE°C
89	LB-FT	700 / 350	145	LB-FT	163 %	185	LB-FT	208 %	50

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
82 dBA	92 dBA	5.5 LB-FT^2	- LB-FT^2	- SEC.	-	- LBS

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	GRAY - LINCOLN

BEAR	RINGS	GREASE	SHAFT TYPE	SPECTAL DE	SPECIAL ODE	SHAFT	FRAME	
DE	ODE	GREASE	SHAFI ITPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL	DOLVDEY EM	TC	NONE NO	NONE	1045 HOT DOLLED (C 204)	DOLLED STEEL	
311	309	POLYREX EM	TS	NONE	NONE	1045 HOT ROLLED (C-204)	ROLLED STEEL	

	THERMO-PROTE	CTORS	THERMISTORS	CONTROL	CDACE HEATERS	
THERMOSTATS	THERMOSTATS PROTECTORS WDG RTDs BRG RTDs		THERMISTORS	CONTROL	SPACE HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

*	INVERTER TORQUE: NONE INV. HP SPEED RANGE: NONE
N	ENCODER: NONE
0	NONE NONE PPR
т	BRAKE: NONE NONE
_	NONE P/N NONE
E	NONE NONE
S	NONE FT-LB NONE V NONE Hz

6 of 7 8/9/2018

