PRODUCT INFORMATION PACKET



Model No: LM15647 Catalog No: LM15647

OBSOLETE - REPLACED BY LM33486 - 3HP,1800,TEFC,182T,3/60/230/460






Nameplate Specifications

| Phase | 3 | Output HP | 3 & 3 Hp |
|------------------------|-----------------------|----------------------------|-----------------------------|
| Output KW | 2.2 & 2.2 kW | Voltage | 230/460 & 190-208/380-415 V |
| Speed | 1760 & 1450 rpm | Service Factor | 1.25 & 1.15 |
| Frame | 182T | Enclosure | Totally Enclosed Fan Cooled |
| Thermal Protection | No Protection | Efficiency | 89.5 & 87.5 % |
| Ambient Temperature | 40 °C | Frequency | 60 & 50 Hz |
| Current | 8/4 & 9-8.6/4.5-4.3 A | Power Factor | 80 |
| Duty | Continuous | Insulation Class | F |
| Design Code | В | KVA Code | К |
| Drive End Bearing Size | 207 | Opp Drive End Bearing Size | 205 |
| UL | Recognized | CSA | Υ |
| CE | Υ | IP Code | 43 |
| Number of Speeds | 1 | | |
| | | | |

Technical Specifications

| Electrical Type | Squirrel Cage Induction Run | Starting Method | Across The Line | |
|-----------------------|-----------------------------|-----------------------|-----------------|--|
| Poles | 4 | Rotation | Reversible | |
| Resistance Main | 3.76 Ohms | Mounting | Rigid Base | |
| Motor Orientation | Horizontal | Drive End Bearing | Ball | |
| Opp Drive End Bearing | Ball | Frame Material | Aluminum | |
| Shaft Type | Т | Assembly/Box Mounting | F1/F2 CAPABLE | |
| Outline Drawing | B-SS601006LN-720 | Connection Drawing | A-EE7308-LN | |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

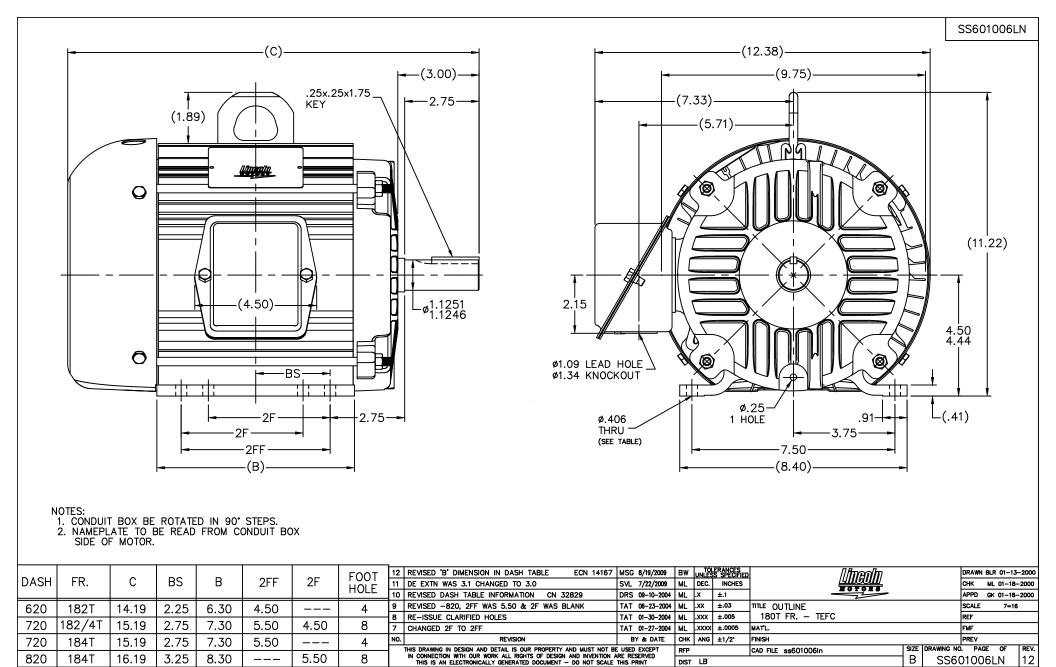

184T

16.19

8.30

DIST LB

В

SS601006LN

12

