PRODUCT INFORMATION PACKET




Model No: LM24202 Catalog No: LM24202

General Purpose Motor, 5 & 5 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190-208/380-415 V, 1800 & 1500 RPM,

184T Frame, DP










Nameplate Specifications

3	Output HP	5 & 5 Hp
3.7 & 3.7 kW	Voltage	230/460 & 190-208/380-415 V
1755 & 1460 rpm	Service Factor	1.15 & 1.15
184T	Enclosure	Drip Proof
No Protection	Efficiency	89.5 & 87.5 %
40 °C	Frequency	60 & 50 Hz
12.6/6.3 & 15.2-14.4/7.6-7.2 A	Power Factor	83
Continuous	Insulation Class	F
В	KVA Code	J
6206	Opp Drive End Bearing Size	6205
Recognized	CSA	Υ
Υ	IP Code	22
1		
	3.7 & 3.7 kW 1755 & 1460 rpm 184T No Protection 40 °C 12.6/6.3 & 15.2-14.4/7.6-7.2 A Continuous B 6206 Recognized	3.7 & 3.7 kW Voltage 1755 & 1460 rpm Service Factor 184T Enclosure No Protection Efficiency 40 °C Frequency 12.6/6.3 & 15.2-14.4/7.6-7.2 A Power Factor Continuous Insulation Class B KVA Code 6206 Opp Drive End Bearing Size Recognized CSA


Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	2.72 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Overall Length	14.19 in
Frame Length	10.00 in	Shaft Diameter	1.125 in
Shaft Extension	2.75 in	Assembly/Box Mounting	F1 ONLY
Connection Drawing	005010.01LN	Outline Drawing	035539LN-1000

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

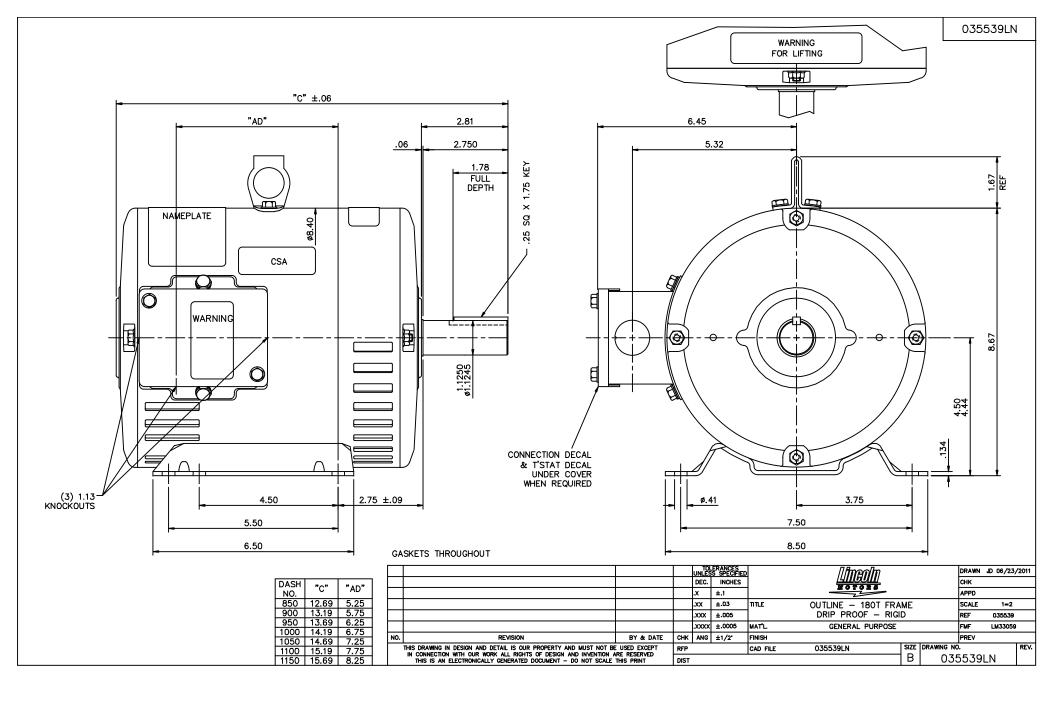

VIEW FROM OUTSIDE OF MOTOR AT SWITCH END.

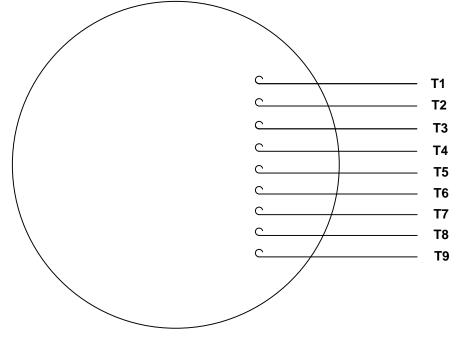

RBC PROPRIETARY AND CONFIDENTIAL INFORMATION
This document is the property of REGAL BELOIT CORPORATION ("RBC") including
its subsidiaries and divisions and contains proprietary information of RBC. This document
is loaned on the express condition that neither it nor the information contained therein shall
be disclosed to others without the express written consent of RBC, and that the information
shall be used by the recipient only as approved expressly by RBC. This document shall be
returned to RBC upon its request. This document may be subject to certain restrictions
under U.S. export control laws and regulations.

LINE LEADS

VOLTAGE	L1	L2	L3	JOIN & INSULATE
HIGH	T1	T2	Т3	(T4,T7) (T5,T8) (T6,T9)
LOW	T1,T7	T2,T8	T3,T9	T4,T5,T6

		TOLERANCES UNLESS SPECIFIED					DRAWN	KMM 04/1	16/02
		DEC	INCHES	<u> </u>			СНК		
		.x	±.1	2			APPR		
		.XX	±.01	TITLE EXTERNAL WIRING DIAGRAM			SCALE 1	l:1	
		.xxx	±.005	3 PHASE W/O PROTECTOR			REF F	FIG. 2-51	
REDRAWN IN SOLIDWORKS	VJB 02/08/11	.xxx	× ±.0005	MAT'L DECAL - 004014			FMF		
NO REVISION	BY & DATE	CHK ANG	±1/2°	FINISH			PAGE	OF	
THIRD ANGLE		RFP 04	/12/02	PREV	SIZE	DRAWING	NO		REV
PROJECTION		NETWORK I	TIENAME O	00501001LN	Α	005	010-01	II N	

