
PRODUCT INFORMATION PACKET

Model No: LM24249 Catalog No: LM24249 125HP..1200RPM.445TSC.TEFC.460V.3PH.60HZ.Cont......







Product Information Packet: Model No: LM24249, Catalog No:LM24249 125HP..1200RPM.445TSC.TEFC.460V.3PH.60HZ.Cont......




Nameplate Specifications

Phase	3	Output HP	125 & 100 Hp
Output KW	93.0 & 75.0 kW	Voltage	460 & 380 V
Speed	1190 & 990 rpm	Service Factor	1.15 & 1.15
Frame	445TSC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	94.1 & 93.6 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	173 & 166 A	Power Factor	72
Duty	Continuous	Insulation Class	F
Design Code	BC	KVA Code	G
Drive End Bearing Size	6318	Opp Drive End Bearing Size	6315
UL	Recognized	CSA	Y
CE	Y	IP Code	43
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Wye Start Delta Run
Poles	6	Rotation	Reversible
Resistance Main	.03 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	TS	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	XK2F1SC2-2317	Connection Drawing	A-EE7340-LN

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

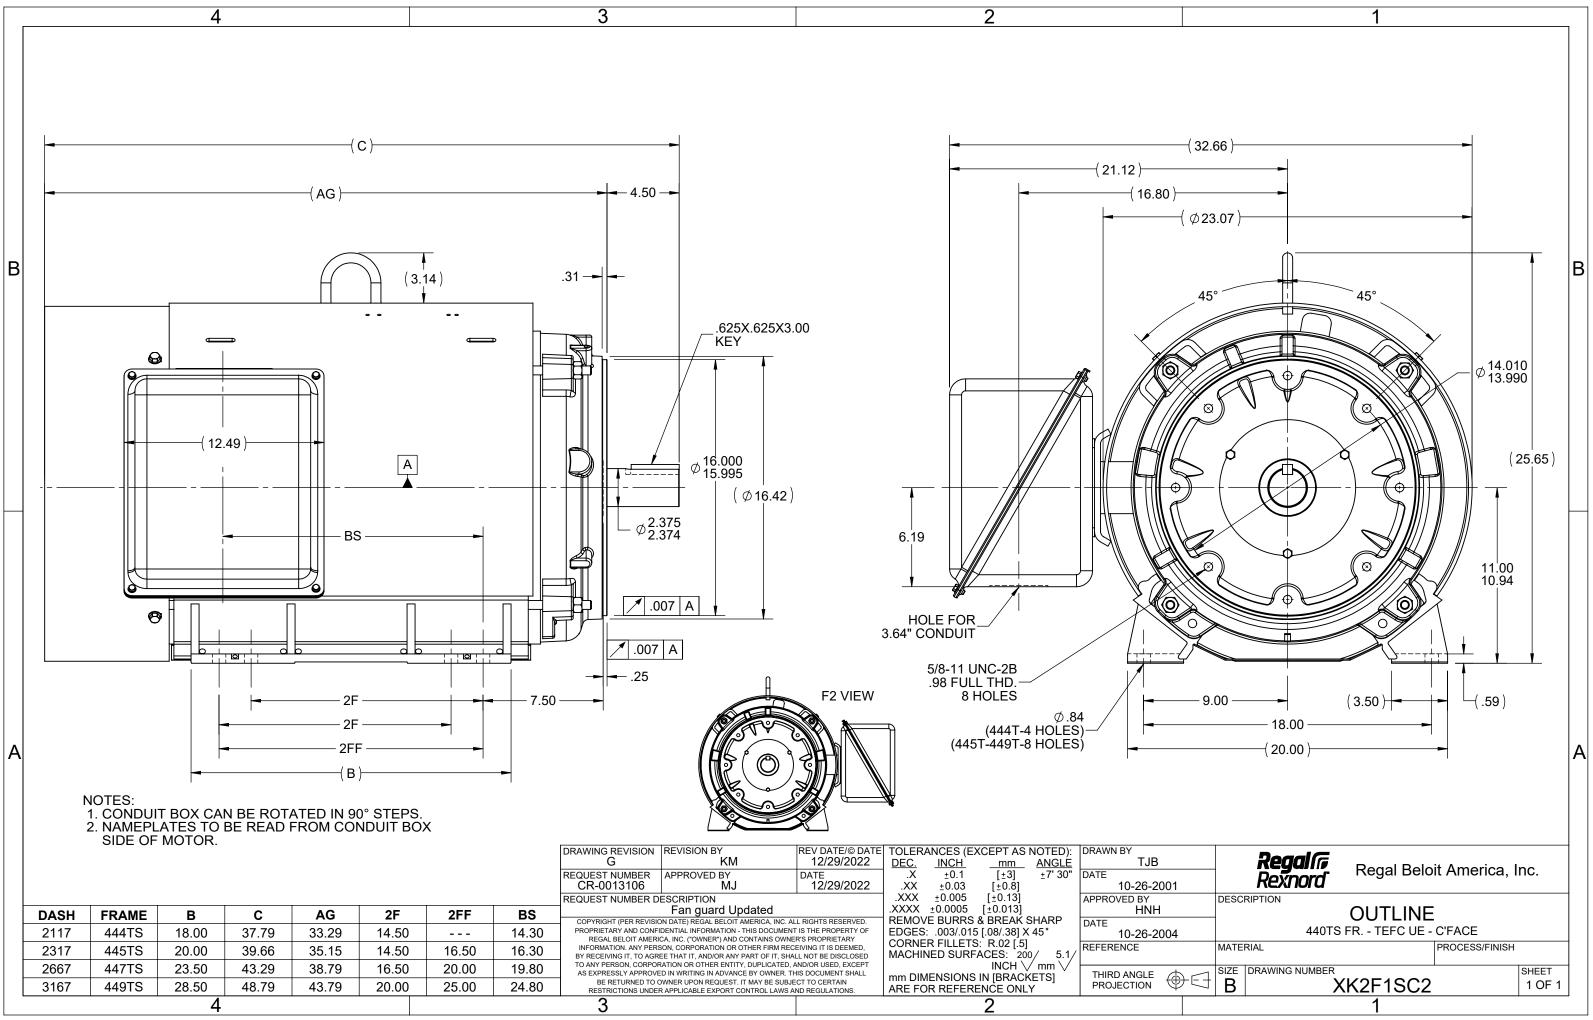

3 of 4

IEC LEAD MARKINGS ARE NOTED	-	V I L				
T1 (U1) T6 (W2) T2 (V1) T4 (U2) T3 (W1) T5 (V2) NOTE:				T2 T2 RMINAL END	 	T2 (V1) T6 (W2) T3 (W1) T6CK T6BM T4CC T2DL T4C
START T1 (U1) • L1 T2 (V1) • L2 T3 (W1) • L3 T4 (U2) • 5 T5 (V2) • 5 T6 (W2) • START			T1	S - Y START		T1 (U1) T4 (U2) T5 (V2)