PRODUCT INFORMATION PACKET



Model No: LM27645 Catalog No: LM27645 15,1800,TEFC,254TC,3/60/230/460






Nameplate Specifications


3	Output HP	15 & 15 Hp
11.2 & 11.2 kW	Voltage	230/460 & 380-415 V
1775 & 1460 rpm	Service Factor	1.25 & 1.15
254TC	Enclosure	Totally Enclosed Fan Cooled
No Protection	Efficiency	92.4 & 91 %
40 °C	Frequency	60 & 50 Hz
37.5/18.8 & 23-22 A	Power Factor	81
Continuous	Insulation Class	F
В	KVA Code	G
309	Opp Drive End Bearing Size	208
Recognized	CSA	Υ
Υ	IP Code	43
1		
	11.2 & 11.2 kW 1775 & 1460 rpm 254TC No Protection 40 °C 37.5/18.8 & 23-22 A Continuous B 309 Recognized	11.2 & 11.2 kW 1775 & 1460 rpm Service Factor 254TC Enclosure No Protection Efficiency 40 °C Frequency 37.5/18.8 & 23-22 A Power Factor Continuous Insulation Class B KVA Code 309 Opp Drive End Bearing Size Recognized CSA

Technical Specifications


Electrical Type	Squirrel Cage Induction Run	Starting Method	Wye Start Delta Run
Poles	4	Rotation	Reversible
Resistance Main	.649 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Aluminum
Shaft Type	NEMA STD DBL	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	B-SS321106LN-1200	Connection Drawing	A-EE7358-LN

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

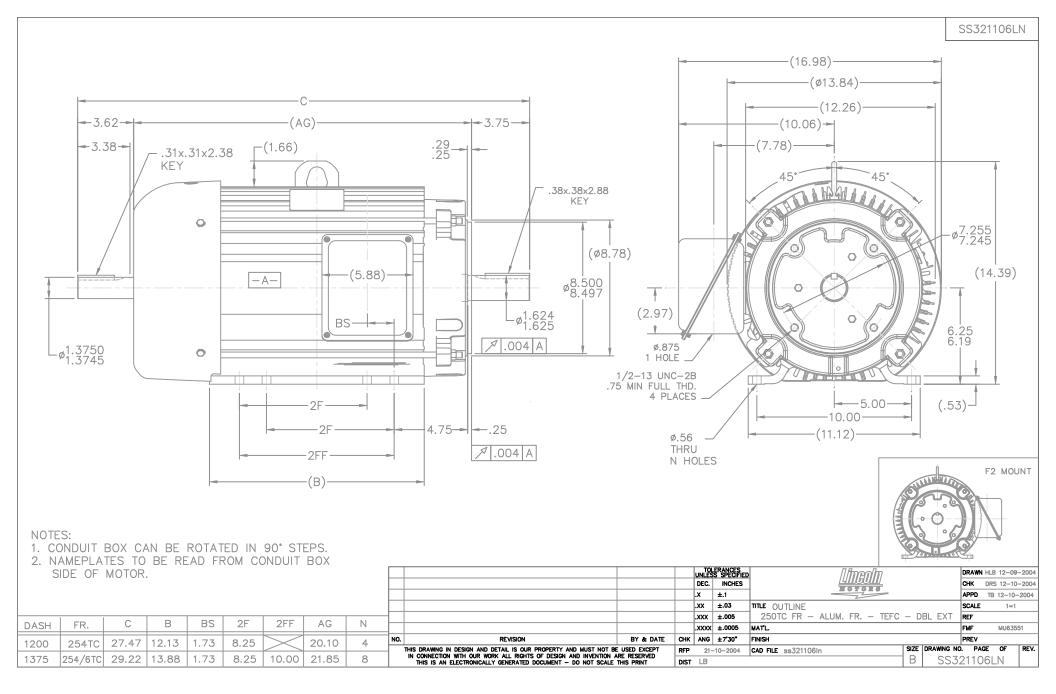

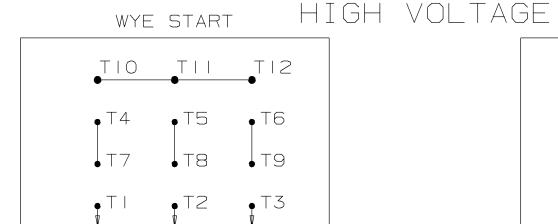


DELTA RUN

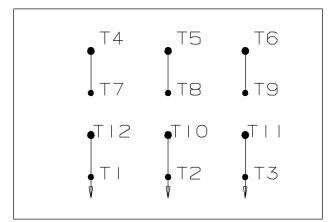


WYE START

LOW VOLTAGE

DELTA RUN

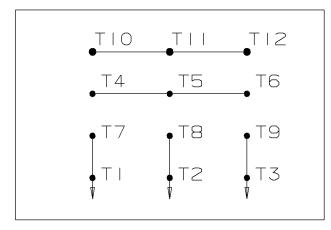

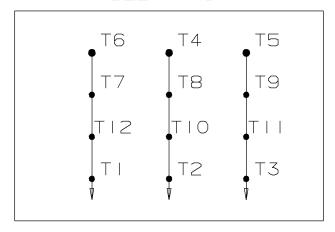

4/2 CKTY△

A-EE7358-LN

					Lincoln	UNLESS OTHERWISE SPECIFIED DIMEN TOL. ON XX±.02 XXX±.005 XXX		NCHES ES± 7'30"
	+					MAX. SURFACE ROUGHNESS UNLESS OTHERWISE NOTED	BRAWN DRS	12-07-1999
					MOTORS	FINISH	CHKD ML	12-07-1999
	12	2-07-1999	NEW DRAWING	DRS		MATERIAL	APPD TB	12-07-1999
					PART NAME CONNECTI	ON DIAGRAM	RWG NO	
IRI	EV	DATE	CHANGE	NAME	COMMECTI	OIN DIAGRAM	4 - FF735	8-1 N

PURCHASED

CADD FILE NO. EE7358-LN