PRODUCT INFORMATION PACKET



Model No: LM32656 Catalog No: LM32656 General Purpose Motor, 75 & 75 HP, 3 Ph, 60 & 50 Hz, 230/460 & 208/415 V, 1800 & 1500 RPM, 365TSC Frame, DP



Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. \hat{A} ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: LM32656, Catalog No:LM32656 General Purpose Motor, 75 & 75 HP, 3 Ph, 60 & 50 Hz, 230/460 & 208/415 V, 1800 & 1500 RPM, 365TSC Frame, DP

Nameplate Specifications


Phase	3	Output HP	75 & 75 Hp
Output KW	56.0 & 56.0 kW	Voltage	230/460 & 208/415 V
Speed	1782 & 1480 rpm	Service Factor	1.25 & 1.00
Frame	365TSC	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	95 & 94.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	176/88 & 200/100 A	Power Factor	84
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6313	Opp Drive End Bearing Size	6311
UL	Recognized	CSA	Y
CE	Υ	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Wye Start Delta Run
Poles	4	Rotation	Reversible
Resistance Main	.067 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	тѕ	Overall Length	27.27 in
Frame Length	16.48 in	Shaft Diameter	1.875 in
Shaft Extension	3.75 in	Assembly/Box Mounting	F1 ONLY
Outline Drawing	XH2D1SC2-1648	Connection Drawing	EE7308AA-LN

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/21/2023

LEESON

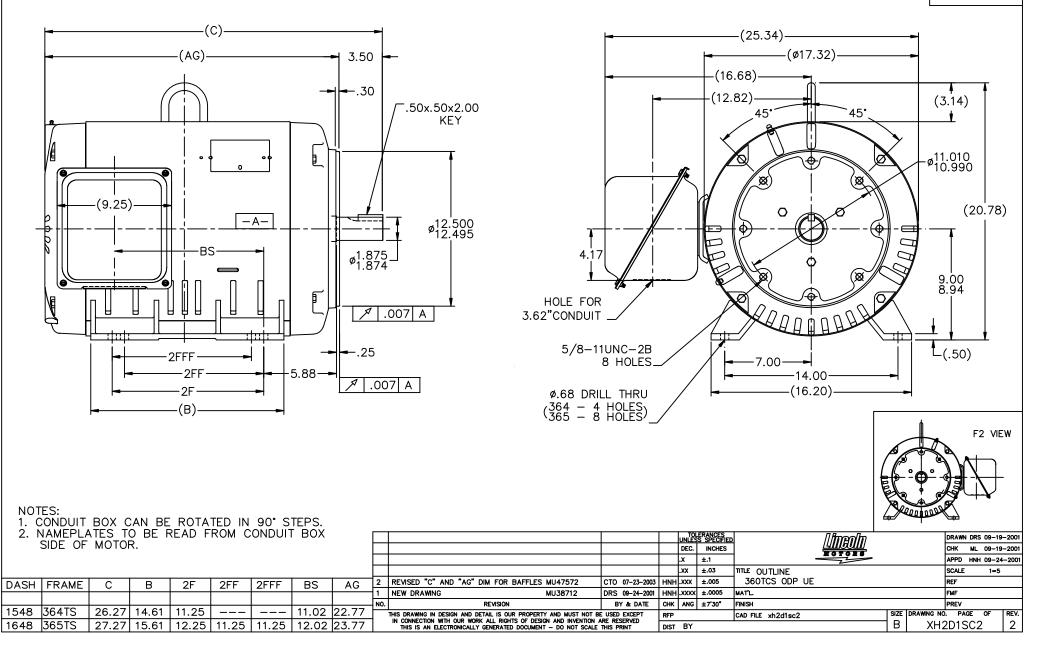

8/25/2007 12:50:38 PM -

4 of 8

T T T									A- EE73	08AA-LN
T T T	4 – 8 – 10 –	L2		/						
Т	3 - 5 - 9 -	LOW VOLTAGE					T12 T1 T1 T1 T1 T1 T1 T1 T1 T1 T1 T1		— T6 — T9 — T12 — T1 — T4 — T7	
	TI2- TI- T4- T7-				т	3 		710	— TIO — T2 — T5 — T8 — TII — T3	
	T2 - TI0- T5 - T8 - T3 -	L2							_	
	TII- T6 - T9 -	HIGH VOLTAGE			VIE	ĒW	OF TERMINA	AL END		
							UNLESS OT	HERWISE SPECIFIED DI X±.02 XXX±.005 X		NCHES ES± 7'30"
2	08-09-1999	RE-ISSUE, ADDED '-' TO PART NUMBER	BLR				MAX. SURFACE ROUGH UNLESS OTHERWISE N FINISH	NESS IOTED	BRAWN TRB Ghkd ML	07-16-1999 06-18-1999
	06-18-1999	NEW DRAWING	TRB				MATERIAL		APPD GK	06-18-1999
REV	DATE	CHANGE	NAME	PART NAME 2/1 DEI	3 PH/ _ta -		CONNECTION DI _EADS	AGRAM	A - EE730	BAA-LN
						PL	RCHASED	CADD FILE NO.	EE7308AALN	

ERROR: undefined OFFENDING COMMAND: Pscrip

STACK:

Uncontrolled Copy



2100 WASHINGTON ST. GRAFTON, WI PH. 262-277-8810

CONN. DIAGRAM: A-EE7308AA-LN

OUTLINE: XH2D1SC2-1648

CATALOG # : LM32656

WINDING #: L3654030 1

MOUNTING: F1 ONLY TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN					
75&75	56.0&56.0	1800	1782&1480	365TSC	DP	G	В					

	PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	АМВ°С
Ī	З	60/50	230/460&208/415	176/88&200/100	WYE START DELTA RUN	CONTINUOUS	F1	1.25/1.0	40

FULL LOAD EFF:	95&94.5	3/4 LOAD EFF:	95	1/2 LOAD EFF:	94.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	84&82.5	3/4 LOAD PF:	81	1/2 LOAD PF:	73.5	94.1	SQ CAGE IND RUN

F.L. TORQUE		LOCKED ROTOR AMPS		L.R. TORO	ĮUE	B.D. TORQUE			F.L. RISE°C
221	LB-FT	1084 / 542	495	LB-FT	224 %	500	LB-FT	226 %	45

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
76 dBA	86 dBA	0 LB-FT^2	- LB-FT^2	- SEC.	-	- LBS.

***** SUPPLEMENTAL INFORMATION *****

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	GRAY - LINCOLN

BEAR	INGS	GREASE			SPECIAL ODE	SHAFT	FRAME	
DE	ODE	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL		тс	NONE	NONE			
6313	13 6311 POLYREX EM		15	NONE	NONE	1045 HOT ROLLED (C-204)	ROLLED STEEL	

	THERMO-PROTE	CTORS		TUERMICTORC	CONTROL		
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	- THERMISTORS	CONTROL	SPACE HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS	
*				INVERTER TORQUE: INV. HP SPEED RANG			
Ν				ENCODER: NONE			
0				NONE NONE NONE	PPR		
т				BRAKE: NONE	NONE		
E				NONE P/N NO NONE NONE FT-LB NONE	NE V NONE	Hz	
S			l	I LE NONE	• NONL	112	

*

Uncontrolled Copy





EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No : LM32656

(Model No. may contain prefix and/or suffix characters)

Catalog No : LM32656

Rework No : N/A

Directives :

Low Voltage Directive 2014/35/EU

Harmonized Standards Used :

EN 60034-1: 2010 (IEC 60034-1: 2010) EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A Logsdon

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

(€ 22

Authorized Representative in the Community:

Julian Clark Marketing Engineer