PRODUCT INFORMATION PACKET



Model No: LM32687 Catalog No: LM32687 OBSOLETE - NO REPLACEMENT FOR ..30HP..3600RPM.284T.ODP.230/460V.3PH.60HZ.CONT.40C..RIGID.......

...



Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies. \hat{A} ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: LM32687, Catalog No:LM32687 OBSOLETE - NO REPLACEMENT FOR ...30HP..3600RPM.284T.ODP.230/460V.3PH.60HZ.CONT.40C..RIGID.....




Nameplate Specifications

3	Output HP	30 & 25 Hp
22.4 & 18.7 kW	Voltage	230/460 & 190/380 V
3535 & 2935 rpm	Service Factor	1.25 & 1.15
284T	Enclosure	Drip Proof
No Protection	Efficiency	93 & 93 %
40 °C	Frequency	60 & 50 Hz
67/33.5 & 68/34 A	Power Factor	91
Continuous	Insulation Class	F
В	KVA Code	G
6310	Opp Drive End Bearing Size	6209
Recognized	CSA	Y
Y	IP Code	12
1		
	22.4 & 18.7 kW 3535 & 2935 rpm 284T No Protection 40 °C 67/33.5 & 68/34 A Continuous B 6310 Recognized	22.4 & 18.7 kWVoltage3535 & 2935 rpmService Factor284TEnclosureNo ProtectionEfficiency40 °CFrequency67/33.5 & 68/34 APower FactorContinuousInsulation ClassBKVA Code6310Opp Drive End Bearing SizeRecognizedCSA

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Wye Start Delta Run
Poles	2	Rotation	Reversible
Resistance Main	.235 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	XF2D1SS1-1298	Connection Drawing	3A218-F7

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

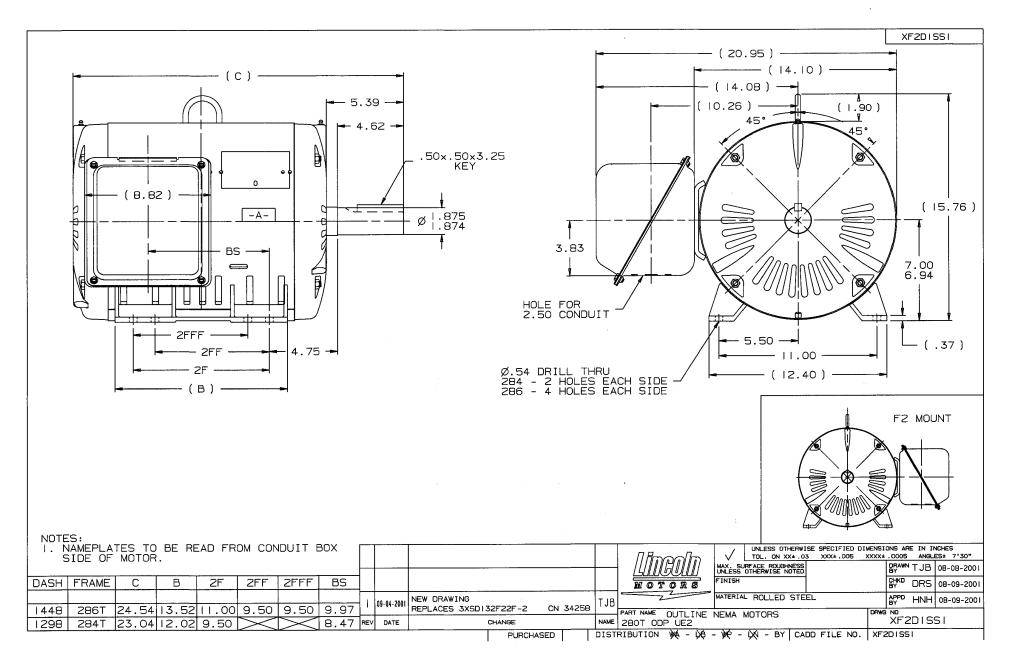



2100 WASHINGTON ST. GRAFTON, WI PH. 262-277-8810

CONN. DIAGRAM: 3A218-F7

OUTLINE: XF2D1SS1-1298

WINDING #: L2842003 1

CATALOG : LM32687

MOUNTING: F1/F2 CAPABLE

TYPICAL MOTOR PERFORMANCE DATA

НР	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
30&25	22.4&18.7	3600	3535&2935	284T	DP	G	В
	-						

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB°C
3	60/50	230/460&190/380	67/33.5&68/34	WYE START DELTA RUN	CONTINUOUS	F4	1.25/1.15	40

FULL LOAD EFF:	93&93	3/4 LOAD EFF:	93.6	1/2 LOAD EFF:	93.6	GTD, EFF	ELEC, TYPE
FULL LOAD PF:	91&90	3/4 LOAD PF:	89	1/2 LOAD PF:	85	91.7	SQ CAGE IND RUN

F.L. TORQUE	LOCKED ROTOR AMPS	LOCKED ROTOR AMPS L.R. TORQUE		F.L. RISE°C
44.5 LB-FT	434 / 217	90 LB-FT 202 %	120 LB-FT 270 %	45

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
80 dBA	90 dBA	- LB-FT^2	- LB-FT^2	- SEC.	-	360 LBS.

***** SUPPLEMENTAL INFORMATION *****

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	GRAY - LINCOLN

BEAR	BEARINGS		SHAFT TYPE		SPECIAL ODE	SHAFT	FRAME
DE	ODE	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL
BALL	BALL		Ŧ	NONE	NONE		
6310	POLYREX EM		1	NONE	NONE	1045 HOT ROLLED (C-204)	ROLLED STEEL

	THERMO-PROTE	CTORS	TUERMICTORS			
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL	SPACE HEATERS
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS
*				INVERTER TORQUE: INV. HP SPEED RANG		
Ν				ENCODER: NONE		
0				NONE NONE NONE	PPR	
т				BRAKE: NONE	NONE	
E				NONE P/N NO	NE	
E				NONE NONE NONE FT-LB NO	ONE V	NONE HZ
S			l	NONE FT-LB NO	ONE V	NONE HZ

*

Uncontrolled Copy

