PRODUCT INFORMATION PACKET




Model No: LM32786 Catalog No: LM32786

General Purpose Motor, 30 & 25 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1800 & 1500 RPM,

286TSC Frame, DP










Nameplate Specifications

Phase	3	Output HP	30 & 25 Hp
Output KW	22.4 & 18.7 kW	Voltage	230/460 & 190/380 V
Speed	1775 & 1475 rpm	Service Factor	1.25 & 1.0
Frame	286TSC	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	94.1 & 93 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	74/37 & 75/37.5 A	Power Factor	81
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	311	Opp Drive End Bearing Size	210
UL	Recognized	CSA	Υ
CE	Υ	IP Code	12
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Wye Start Delta Run
Poles	4	Rotation	Reversible
Resistance Main	.22 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	TS	Overall Length	25.44 in
Frame Length	15.12 in	Shaft Diameter	1.625 in
Shaft Extension	3 in	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	B-SS207877LN-1512	Connection Drawing	A-EE7358-LN

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

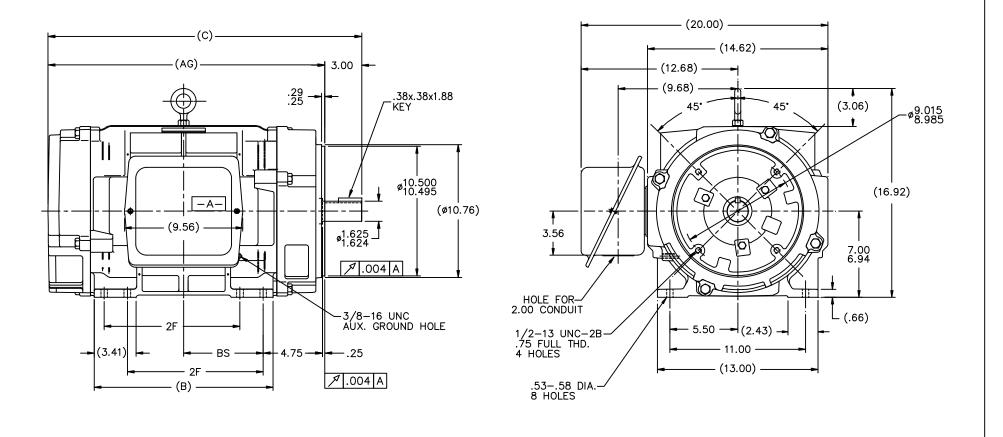

NOTES:


1. CONDUIT BOX CAN BE ROTATED IN 90° STEPS.

 CONDUIT BOX CAN BE MOUNTED ON OPPOSITE SIDE BY REMOVING BRACKETS AND TURNING FRAME 180°.


3. NAMEPLATE TO BE READ FROM CONDUIT BOX SIDE OF MOTOR

٠	i Wio i Oix.												DEC.	INCHES	WARRE	СНК	ML 03/05/2004
													.x	±.1	HOTORS	APPD	BW 03/05/2004
								3	2.00 CONDUIT WAS 1.50 ECN #25435	WGJ 08-1	16-2012	EMH	.xx	±.02	TITLE OUTLINE	SCALE	1=5
D A CI I	I E D A N I E			٥٦	DC	MITO	1 40	2	REVISED 'BA' DIMENSION TO BE 4.75 MU49925	MSG 1/5/	/2010	MJS	.xxx	±.005	280TSC FRTS -DR.PR CAST IRON	REF	
DASH	FRAME	B	C	∠ F	BS	MTG	AG	_1	CHANGE D.E. BKT. FROM 12.5 TO 10.5 MU49925	RWR 03-1	10-2004	BW	.xxxx	±.0005	MAT'L.	FMF	
1325	284TSC	12.63	23.57	9.50	5.50		20.57	NO.	REVISION	BY & [DATE	CHK	ANG	±7'30"	FINISH	PREV	
1020	201100	12.00	20.07	3.00	0.00		20.07		THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE	USED EXCE	EPT	RFP			CAD FILE ss207877In SIZE DRAWING	NO. PA	GE 1 OF 1 REV.
1512	286TSC	14.50	25.44	11.00	6.44		22.44		IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION A THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE		≅o ∤	DIST	WA-			20787	77LN 3

TOLERANCES UNLESS SPECIFIED DRAWN RWR 03/03/2004

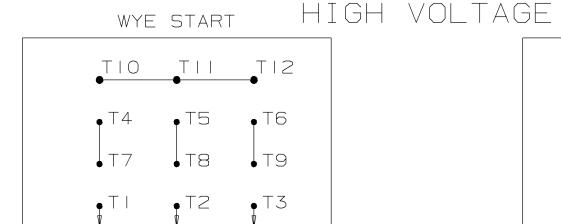


DELTA RUN

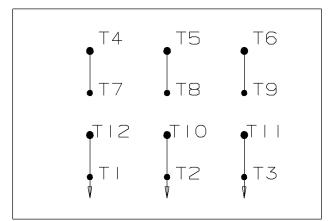


WYE START

LOW VOLTAGE

DELTA RUN

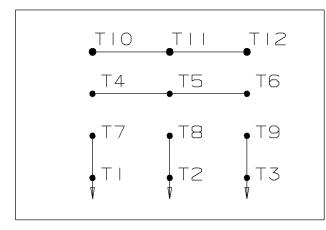

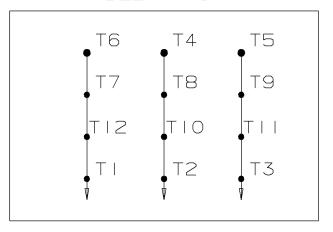

4/2 CKTY△

A-EE7358-LN

				lincoln	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL. ON XX±.02 XXX±.005 XXXX±.0005 ANGLES±7'30"
					MAX. SURFACE ROUGHNESS UNLESS OTHERWISE NOTED BY DRS 12-07-19
				MOTORS	FINISH CHKD BY ML 12-07-19
	12-07-1999	NEW DRAWING	DRS		MATERIAL APPD TB 12-07-19
				PART NAME CONNECTION	ION DIAGRAM DRWG NO
REV	DATE	CHANGE	NAME		IA-FF/358-IN

PURCHASED

CADD FILE NO. EE7358-LN



2100 WASHINGTON ST. GRAFTON, WI PH. 262-277-8810

CERTIFICATION DATA SHEET

CONN. DIAGRAM: A-EE7358-LN **OUTLINE:** B-SS207877LN-1512 **WINDING #:** K2864304 1

CATALOG: LM32786

MOUNTING: F1/F2 CAPABLE

TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
30&25	22.4&18.7	1800	1775&1475	286TSC	DP	G	В

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB°C
3	60/50	230/460&190/380	74/37&75/37.5	WYE START DELTA RUN	CONTINUOUS	F3	1.25/1.0	40

FULL LOAD EFF:	94.1&93	3/4 LOAD EFF:	94.1	1/2 LOAD EFF:	93.6	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	81&81.5	3/4 LOAD PF:	76.5	1/2 LOAD PF:	66	93.6	SQ CAGE IND RUN

F.L. TORQUE LOCKED ROTOR AMPS		L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
89 LB-FT	416 / 208	160 LB-FT 180 %	220 LB-FT 247 %	25

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
72 dBA	82 dBA	4.7 LB-FT^2	- LB-FT^2	20 SEC.	-	460 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	GRAY - LINCOLN

BEAF	RINGS	GREASE	SHAFT TYPE	SDECTAL DE	SPECIAL ODE	SHAFT	FRAME	
DE	ODE	GREASE	SHAFITYPE	FT TYPE SPECIAL DE SPECIAL ODE		MATERIAL	MATERIAL	
BALL	BALL	DOLVDEY EM	TC	NONE	NONE	1045 HOT BOLLED (C 204)	CAST IDON	
311	210	POLYREX EM	TS	NONE	NONE	1045 HOT ROLLED (C-204)	CAST IRON	

	THERMO-PROTE	THERMISTORS	CONTROL	SPACE HEATERS			
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	IHERMISTORS	CONTROL	SPACE HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS	

INVERTER TORQUE: NONE
INV. HP SPEED RANGE: NONE

ENCODER: NONE

NONE NONE PPR

BRAKE: NONE NONE
NONE P/N NONE
NONE NONE

FT-LB V NONE Hz

N

0

T

Ε

S

*

