PRODUCT INFORMATION PACKET



Model No: LM33495 Catalog No: LM33495

LM33495..25/20HP..1800/1500RPM.284TCV.TEFC.230/460-190/380VAC.3PH.60HZ.CONT.....






Nameplate Specifications


Phase	3	Output HP	25 & 20 Hp			
Output KW	18.7 & 14.9 kW	Voltage	230/460 & 190/380 V			
Speed	1774 & 1470 rpm	Service Factor	1.15 & 1.00			
Frame	284TCV	Enclosure	Totally Enclosed Fan Cooled			
Thermal Protection	No Protection	Efficiency	93.6 & 93 %			
Ambient Temperature	50 °C	Frequency	60 & 50 Hz			
Current	62/31 & 60/30 A	Power Factor	81 F G			
Duty	Continuous	Insulation Class				
Design Code	В	KVA Code				
Drive End Bearing Size	6311	Opp Drive End Bearing Size	6210			
UL	Recognized	CSA	Υ			
CE	Υ	IP Code	54			
Number of Speeds	1					

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Part Wdg Start Low Volt Only & Wye Start Delta Run
Poles	4	Rotation	Reversible
Resistance Main	.251 Ohms	Mounting	Round
Motor Orientation	Shaft Down	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	B-SS312394LN-1425	Connection Drawing	A-EE7308DX-LN

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:08/16/2023

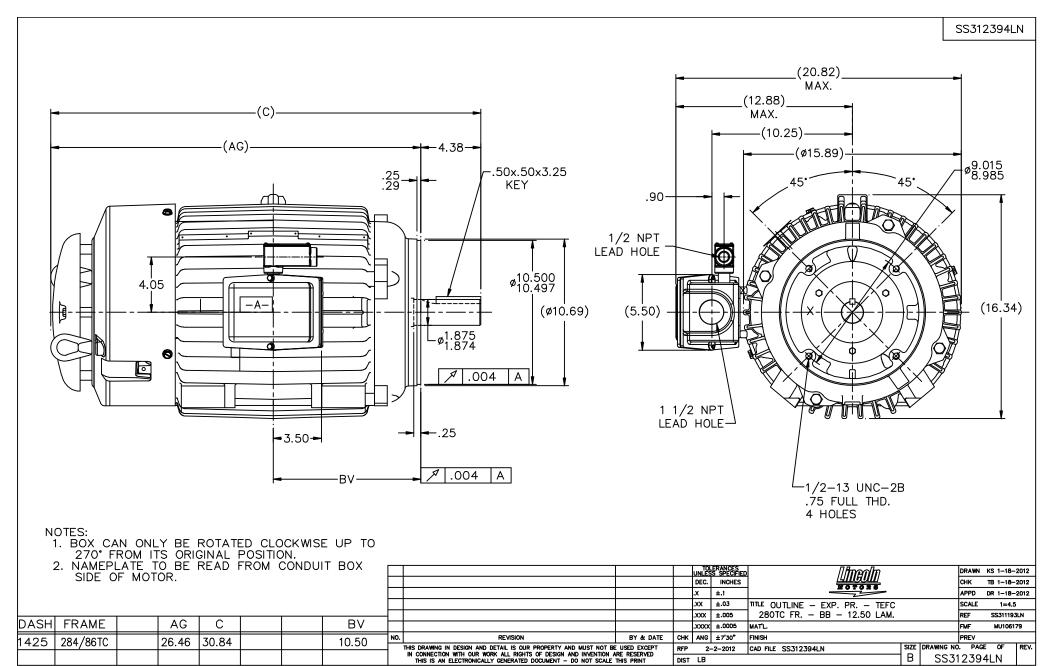

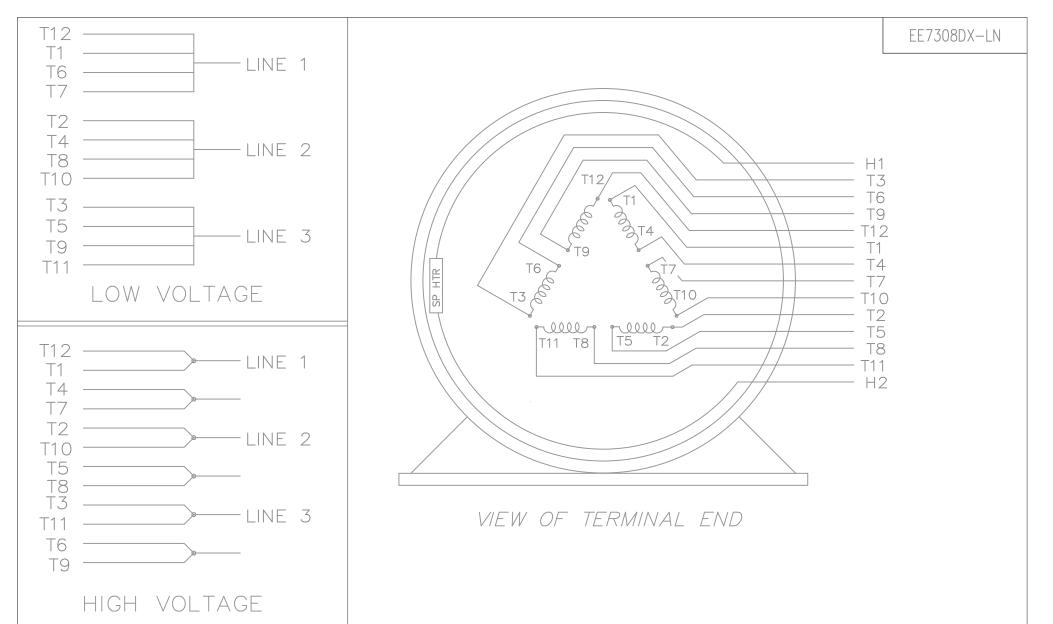

				TO	LERAI	NCES ECIFIED	1. Impolin		DRAWN KL 05-20-2003			
				DEC.		CHES	HOTORS		CHK GFH 05-21-2003		1-2003	
				.x	±	-			APPD JES 05-21-2003			
				.xx	±	-	TITLE CONNECTION DIAGRAM — EXTERNAL			1=1		
				.xxx	±	-	30 DUAL VOLTAGE MOTOR — 12 LEADS			REF		
1	NEW DRAWING MU46557	KL 05-21-2003		.xxxx	±	-	MAT'L. FMF					
NO.	REVISION	BY & DATE	СНК	ANG	±	-	FINISH PREV					
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED					CAD FILE EE7308DX-LN	SIZE DRAWING NO	0. Pag 308DX-	E OF	REV.			
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT			DIST WA			A EE/3	- LI/I					