## PRODUCT INFORMATION PACKET



Model No: LM33807 Catalog No: LM33807

LM33807..25/20HP..1800/1500RPM.284TCV.TEFC.230/460//190/3We.3PH.60/50HZ.CONT.40C.1.15/1.0SF.......

.....






## Nameplate Specifications


Output HP	25 Hp	Output KW	18.7 kW		
Frequency	60 Hz	Voltage	230/460 V		
Current	62.0/31.0 A	Speed	1774 rpm		
Service Factor	1.15	Phase	3		
Efficiency	93.6 %	Power Factor	81		
Duty	Continuous	Insulation Class	F		
Design Code	В	KVA Code	G		
Frame	284TCV	Enclosure	Totally Enclosed Fan Cooled		
Thermal Protection	No Protection	Ambient Temperature	50 °C		
Drive End Bearing Size	6311	Opp Drive End Bearing Size	6210		
UL	Recognized	CSA	Υ		
CE	Υ	IP Code	54		
Number of Speeds	1				

## **Technical Specifications**

Electrical Type	Squirrel Cage Induction Run	Starting Method	Part Wdg Start Low Volt Only & Wye Start Delta Run Reversible			
Poles	4	Rotation				
Resistance Main	.251 Ohms	Mounting	Round			
Motor Orientation	Shaft Down	Drive End Bearing	Ball			
Opp Drive End Bearing	Ball	Frame Material	Cast Iron			
Shaft Type	Т	Shaft Diameter	1.875 in			
Assembly/Box Mounting	F1/F2 CAPABLE					
Connection Drawing	EE7308DX-LN	Outline Drawing	SS312394LN-1425			

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:03/23/2023

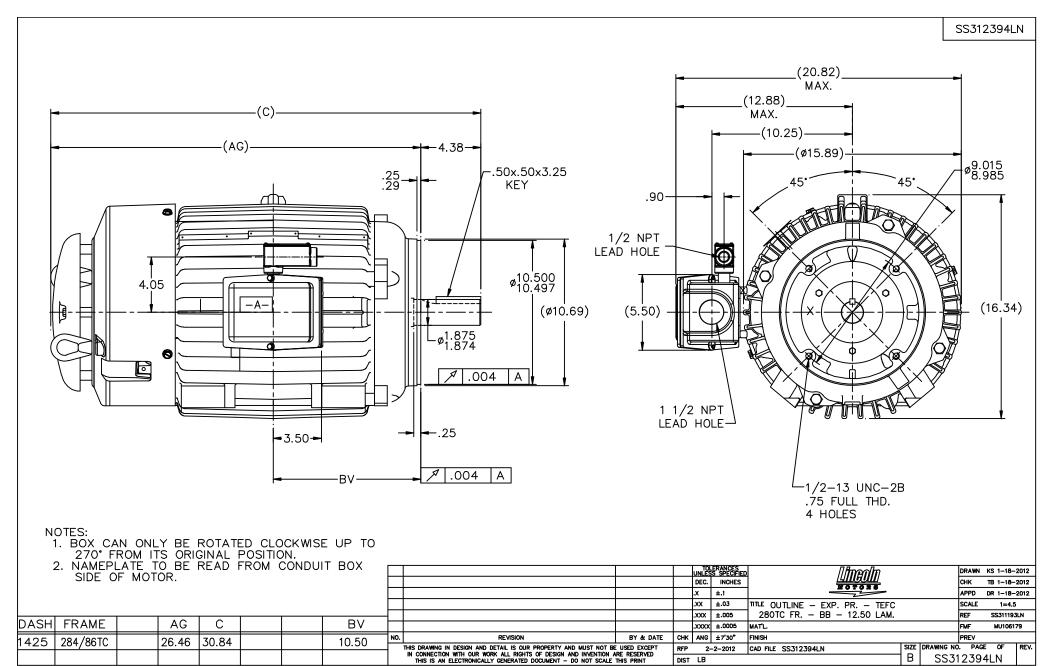

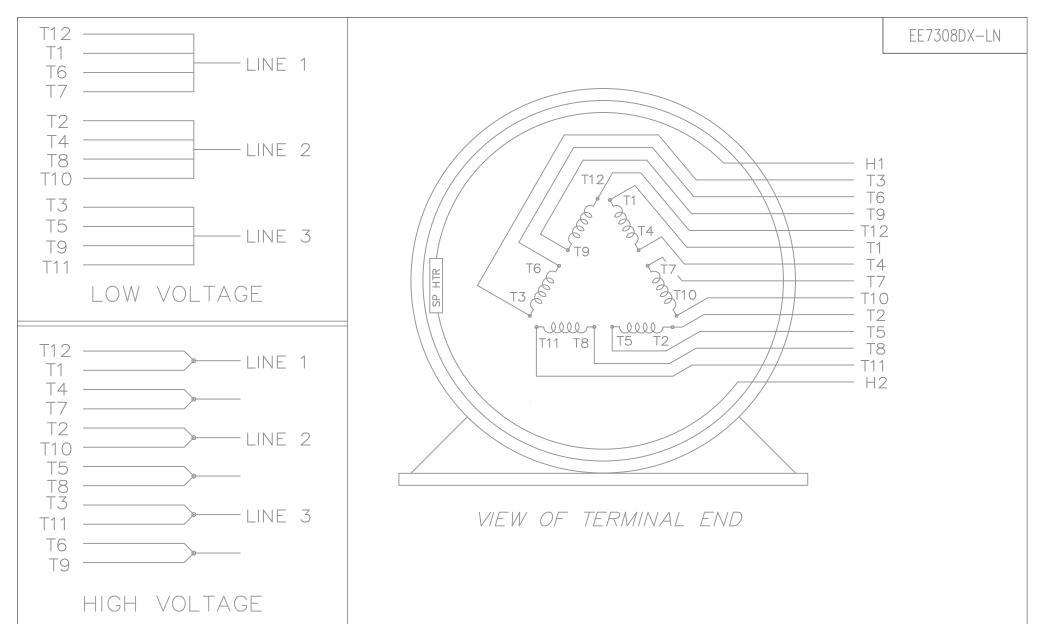

				TO UNLES	LERAI	NCES ECIFIED	TITLE CONNECTION DIAGRAM — EXTERNAL		DRAWN KL 05-20-2003		
				DEC.		CHES			CHK GFH 05-21-2003		1-2003
				.x	±	-			APPD JES 05-21-2003		
				.xx	±	-			SCALE	1=1	
				.xxx	±	-	30 DUAL VOLTAGE MOTOR — 12 LEADS		REF		
1	NEW DRAWING MU46557	KL 05-21-2003		.xxxx	±	-	MAT'L. FMF				
NO.	REVISION	BY & DATE	СНК	ANG	±	-	FINISH				
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED		RFP				CAD FILE EE7308DX-LN	SIZE DRAWING NO	0. <b>pag</b> 308DX-	E OF	REV.	
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT			DIST WA			A   EE/3	- LI/I				