
PRODUCT INFORMATION PACKET



Model No: LM34292 Catalog No: LM34292 LM34292..20HP..1772/1465RPM.286TC.ODP.230/460//190-208/380-415V.3PH.60/50HZ.CONT.40C.1.25SF/1.0SF.R IGID......





Product Information Packet: Model No: LM34292, Catalog No:LM34292 LM34292..20HP..1772/1465RPM.286TC.ODP.230/460//190-208/380-415V.3PH.60/50HZ.CONT.40C.1.25SF/1.0SF.RIGID.....

LEESON


Nameplate Specifications


Phase	3	Output HP	20 & 20 Hp
Output KW	14.9 & 14.9 kW	Voltage	230/460 & 190-208/380-415 V
Speed	1775 & 1467 rpm	Service Factor	1.25 & 1.0
Frame	256TC	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	93 & 91 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	48/24 & 59-55/29.5-27.5 A	Power Factor	82.5
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	F
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6208
UL	Recognized	CSA	Y
CE	Y	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Wye Start Delta Run	
Poles	4	Rotation	Reversible	
Resistance Main	.12 Ohms	Mounting	Rigid Base	
Motor Orientation	Horizontal	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Cast Iron	
Shaft Type	NEMA STD DBL	Assembly/Box Mounting	F1/F2 CAPABLE	
Outline Drawing	B-SS207988LN-1425	Connection Drawing	A-EE7358-LN	

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

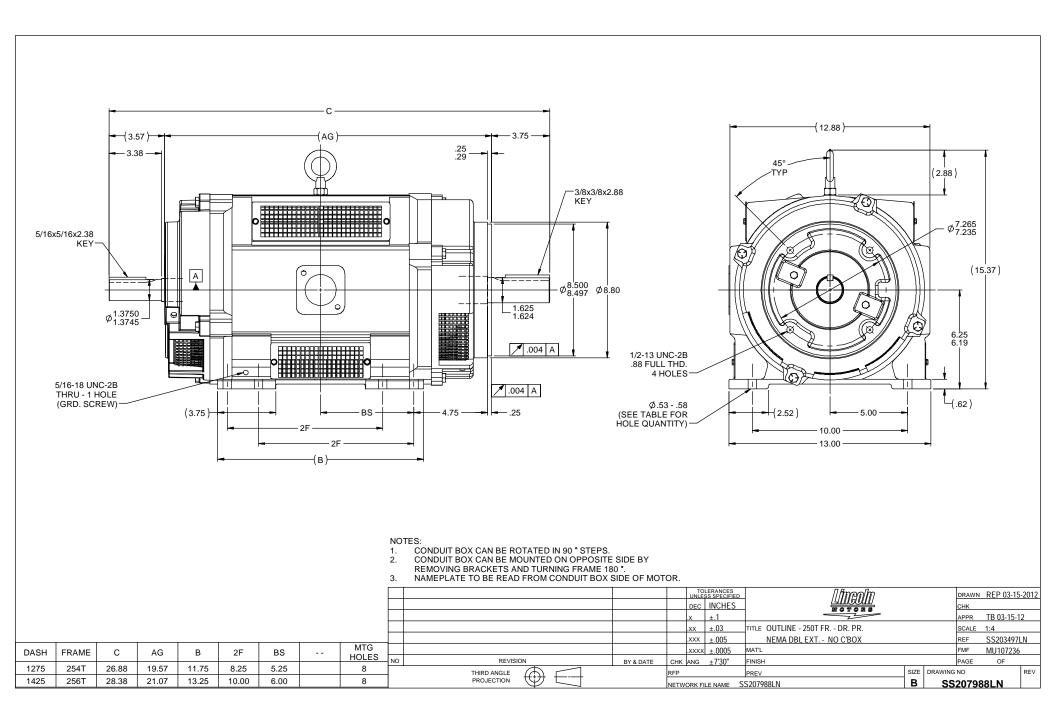

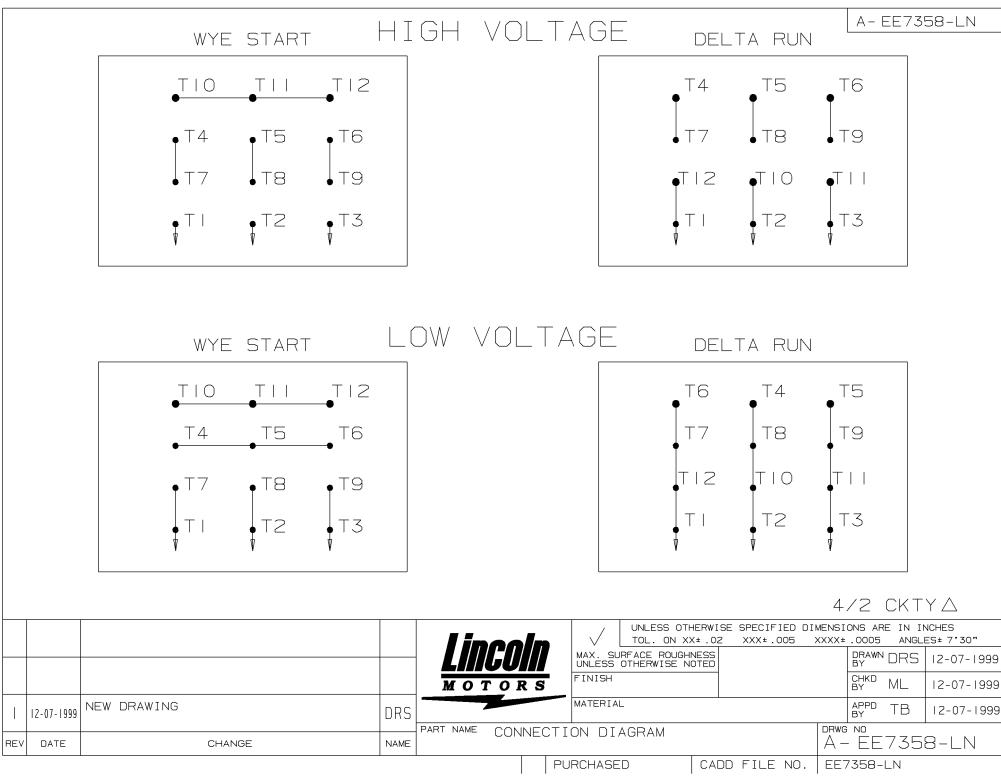

9/4/2007 11:27:42 PM -

4 of 4