

# PRODUCT INFORMATION PACKET



Model No: LM62038

Catalog No: LM62038

DISOLETE - REPLACED BY 199066.00 - ..30HP..1800RPM.286TC.TEFC.230/460V.3PH.60HZ.CONT.40C.1.15SF.RIG  
ID-C.....

Regal and Leeson are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E






### Nameplate Specifications

Phase	3	Output HP	30 & 25 Hp
Output KW	22.4 & 18.7 kW	Voltage	230/460 & 190/380 V
Speed	1780 & 1480 rpm	Service Factor	1.15 & 1.15
Frame	286TC	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	94.1 & 93 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	70/35 & 71/35.5 A	Power Factor	85.6
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	H
Drive End Bearing Size	6311	Opp Drive End Bearing Size	6309
UL	Recognized	CSA	Y
CE	Y	IP Code	43
Number of Speeds	1		

### Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Wye Start Delta Run
Poles	4	Rotation	Reversible
Resistance Main	.052 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	T	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	SS622045RB	Connection Drawing	004172.03

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/23/2023

											TOLERANCES UNLESS SPECIFIED		 <b>REGAL-BELOIT CORPORATION</b>		DRAWN RFH 01/30/2012															
											DEC. INCHES				CHK SB 01/30/2012															
											.X ±.1				APPD EH 01/30/2012															
											.XX ±.03		TITLE OUTLINE		SCALE 1=2															
---									N284TSC-2		24.88		21.63		---		9.50		---		4		3.25							
---									N284TC-4		26.26		21.64		---		9.50		---		4		4.62							
---									N286TC-4		27.84		23.22		---		11.00		9.50		6		4.62							
DASH									FRAME		C		AG		B		2F		2XF		K		N-W							
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT											NO.		REVISION		BY & DATE		CHK ANG ±7°30"		FINISH		CAD FILE SS622045RB		SIZE B		DRAWING NO. SS622045RB		PAGE OF		REV.	
															RFP		DIST LB													

WYE - DELTA STARTING USEABLE ON 2,4 AND 6 POLE MOTORS.

### LOW VOLTAGE CONNECTION



### HIGH VOLTAGE CONNECTION



REFER TO THE WYE-DELTA STARTER CONNECTION INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.


### PART WINDING START USABLE ON 4 & 6 POLE MOTORS LOW VOLTAGE CONNECTION ONLY



REFER TO THE PART WINDING STARTER INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

REFER TO THE CUTLER - HAMMER OR EQUIV. FOR PROPER SELECTION OF OVERLOAD HEATER COILS.

### LINE LEADS

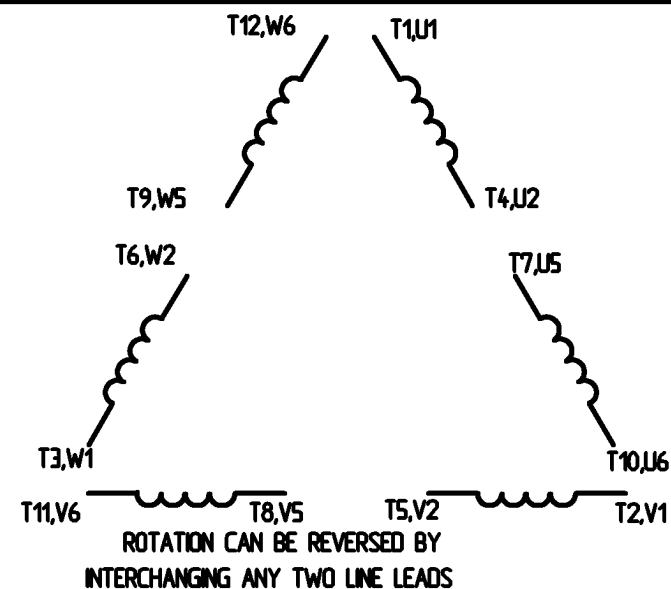

### 12 LEAD DELTA CONNECTION ACROSS THE LINE START (FOR Y START DELTA RUN, REMOVE THE JUMPERS)

LOW VOLTAGE  
(MUST BE REWIRED AS SHOWN)

HIGH VOLTAGE  
(FACTORY WIRED FOR HIGH VOLTAGE AS SHOWN)



				TOLERANCES UNLESS SPECIFIED		<div>LEESON</div>	ELECTRIC MOTORS GEARMOTORS AND DRIVES	DRAWN C/W 08/28/02	
				DEC.	INCHES			CHK	
				X	± .1	TITLE DELTA - WYE CONNECTION DIAGRAM IEC CAST IRON MOTORS		APPD	
				XX	± .01			SCALE	1:1
				XXX	± .005			REF	
				XXXX	± .0005			FMF	
NO.	REVISION	BY & DATE	CHK	ANG	± 1/2°	FINISH		PREV	
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK. ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED. THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT.				REP		CAD FILE	00417203	SIZE	DRAWING NO.
				DST				A	004172-03
									REV.

ERROR: syntaxerror  
OFFENDING COMMAND: --nostringval--

STACK:

/CB  
-dictionary-  
/Pscript\_WinNT\_Compat  
-dictionary-