

# PRODUCT INFORMATION PACKET

**marathon®**  
Motors

Model No: TCA1101AF121GAC010

Catalog No: TCA1101AF121GAC010

TerraMAX® Cast Iron Motor, 150 HP, 3 Ph, 50 Hz, 380 V, 3000 RPM, 315S Frame, TEFC



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E

**RegalRexnord**

### Nameplate Specifications

|                        |                      |                            |                                    |
|------------------------|----------------------|----------------------------|------------------------------------|
| Output HP              | <b>150 Hp</b>        | Output KW                  | <b>110.0 kW</b>                    |
| Frequency              | <b>50 Hz</b>         | Voltage                    | <b>380 V</b>                       |
| Current                | <b>199.5 A</b>       | Speed                      | <b>2983 rpm</b>                    |
| Service Factor         | <b>1</b>             | Phase                      | <b>3</b>                           |
| Efficiency             | <b>95.2 %</b>        | Power Factor               | <b>0.88</b>                        |
| Duty                   | <b>S1</b>            | Insulation Class           | <b>F</b>                           |
| Frame                  | <b>315S</b>          | Enclosure                  | <b>Totally Enclosed Fan Cooled</b> |
| Thermal Protection     | <b>No Protection</b> | Ambient Temperature        | <b>40 °C</b>                       |
| Drive End Bearing Size | <b>6316</b>          | Opp Drive End Bearing Size | <b>6316</b>                        |
| UL                     | <b>No</b>            | CSA                        | <b>No</b>                          |
| CE                     | <b>Yes</b>           | IP Code                    | <b>55</b>                          |
| Number of Speeds       | <b>1</b>             | Efficiency Class           | <b>IE3</b>                         |

### Technical Specifications

|                       |                      |                       |                       |
|-----------------------|----------------------|-----------------------|-----------------------|
| Electrical Type       | <b>Squirrel Cage</b> | Starting Method       | <b>Direct On Line</b> |
| Poles                 | <b>2</b>             | Rotation              | <b>Bi-Directional</b> |
| Mounting              | <b>B5</b>            | Motor Orientation     | <b>Horizontal</b>     |
| Drive End Bearing     | <b>C3</b>            | Opp Drive End Bearing | <b>C3</b>             |
| Frame Material        | <b>Cast Iron</b>     | Shaft Type            | <b>Keyed</b>          |
| Overall Length        | <b>1176 mm</b>       | Frame Length          | <b>729 mm</b>         |
| Shaft Diameter        | <b>65 mm</b>         | Shaft Extension       | <b>140 mm</b>         |
| Assembly/Box Mounting | <b>Top</b>           |                       |                       |
| Outline Drawing       | <b>0231500880</b>    | Connection Drawing    | <b>8442000085</b>     |

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:12/01/2022




4

3

2

1

# OUTLINE

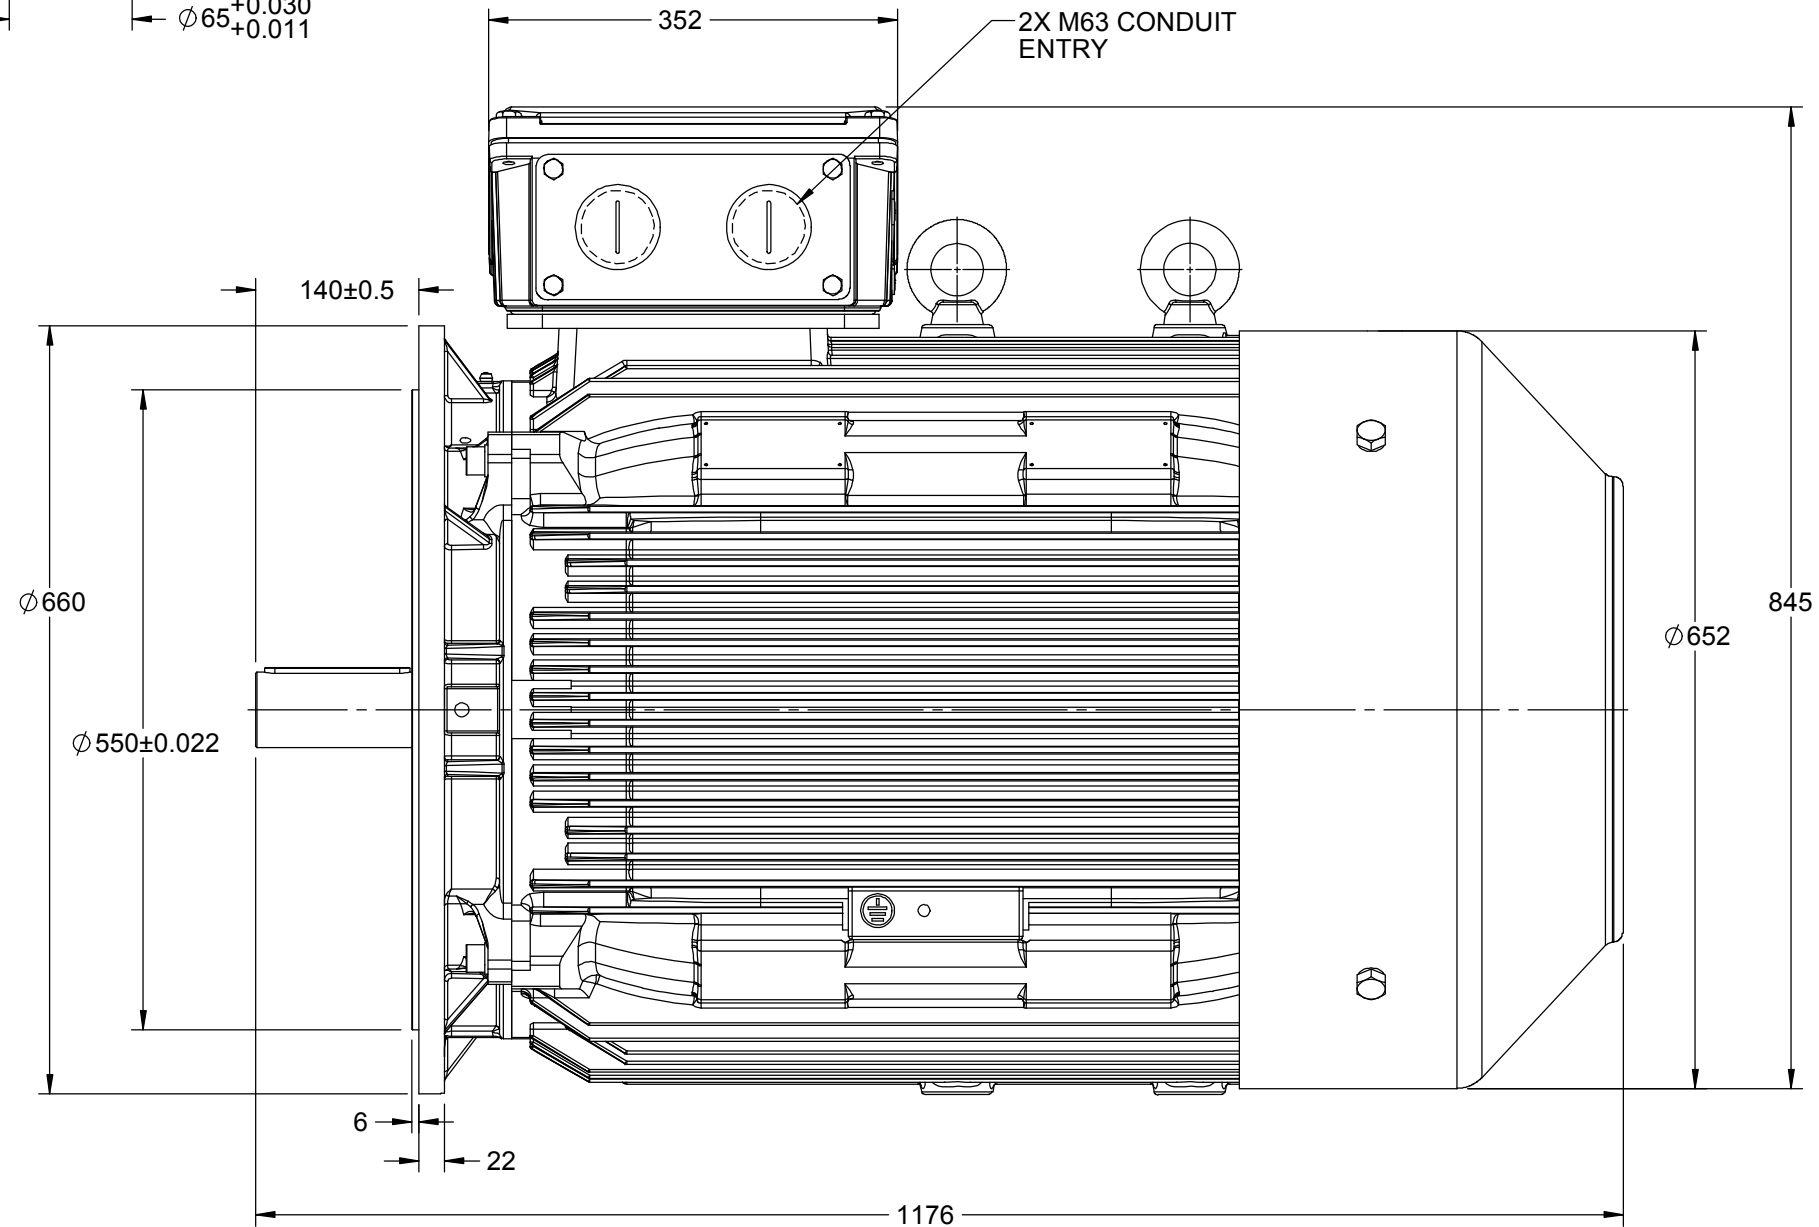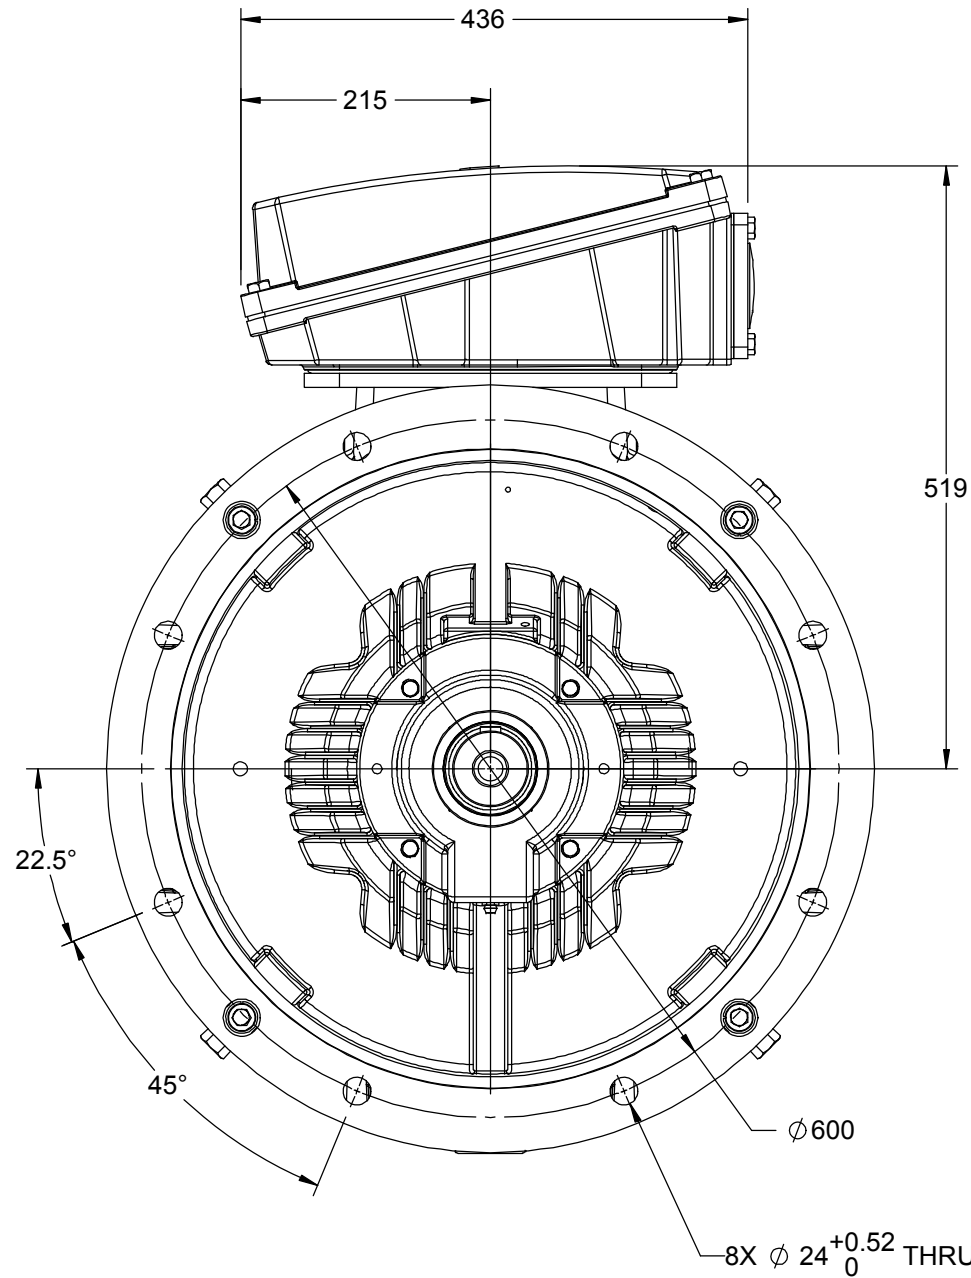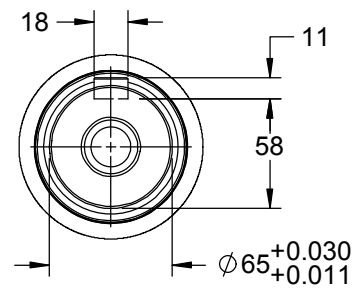

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |                    |  |                           |                                 |                              |                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------|--|---------------------------|---------------------------------|------------------------------|-----------------|
| DRAWING REVISION<br>B                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | REVISION BY<br>NIV | DATE<br>10/05/2019 |  | DRAWN BY<br>JOY           |                                 |                              |                 |
| ECO<br>ECO-0167240                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | APPROVED BY<br>SR  | DATE<br>10/05/2019 |  | DATE<br>18/07/2014        |                                 |                              |                 |
| ECO DESCRIPTION<br>MODEL UPDATED                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                    |                    |  | APPROVED BY<br>SBD        | DESCRIPTION<br>OUTLINE          |                              |                 |
| COPYRIGHT REGAL BELOIT AMERICA, INC. ALL RIGHTS RESERVED.<br>PROPRIETARY AND CONFIDENTIAL INFORMATION - THIS DOCUMENT IS THE PROPERTY OF<br>REGAL BELOIT AMERICA, INC. ("OWNER") AND CONTAINS OWNER'S PROPRIETARY<br>INFORMATION. ANY PERSON, CORPORATION OR OTHER FIRM RECEIVING IT IS DEEMED,<br>BY RECEIVING IT, TO AGREE THAT IT, AND/OR ANY PART OF IT, SHALL NOT BE DISCLOSED<br>TO ANY PERSON, CORPORATION OR OTHER ENTITY, DUPLICATED, AND/OR USED, EXCEPT<br>AS EXPRESSLY APPROVED IN WRITING IN ADVANCE BY OWNER. THIS DOCUMENT SHALL<br>BE RETURNED TO OWNER UPON REQUEST. IT MAY BE SUBJECT TO CERTAIN<br>RESTRICTIONS UNDER APPLICABLE EXPORT CONTROL LAWS AND REGULATIONS. |                    |                    |  | DATE<br>18/07/2014        | 315M-2P-B5 MTG. MOTOR TYPE: TCA |                              |                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |                    |  | REFERENCE                 | MATERIAL                        | PROCESS/FINISH               |                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                    |                    |  | THIRD ANGLE<br>PROJECTION | SIZE<br>B                       | DRAWING NUMBER<br>0231500880 | SHEET<br>1 OF 1 |

4

3


2

1

Copyright Regal Beloit America, Inc. All rights reserved. This document is the property of Regal Beloit America, Inc. ("Owner") and contains Owner's proprietary information. Any person, corporation or other firm receiving it is deemed, by receiving it, to agree that it, and/or any part of it, shall not be disclosed to any person, corporation or other entity, duplicated, and/or used, except as expressly approved in writing in advance by Owner. This document shall be returned to Owner upon request. It may be subject to certain restrictions under applicable export control laws and regulations.

|                                        |                    |                    |
|----------------------------------------|--------------------|--------------------|
| DRAWING REVISION<br>A                  | REVISION BY<br>SN  | DATE<br>13/01/2017 |
| ECO<br>ECO-0116390                     | APPROVED BY<br>SBD | DATE<br>13/01/2017 |
| ECO DESCRIPTION<br>NEW DRAWING RELEASE |                    |                    |

| GEOMETRIC TOLERANCE |         |      |
|---------------------|---------|------|
| LINEAR DIM          | >0~6    | ±0.1 |
|                     | >6~30   | ±0.2 |
|                     | >30~120 | ±0.3 |

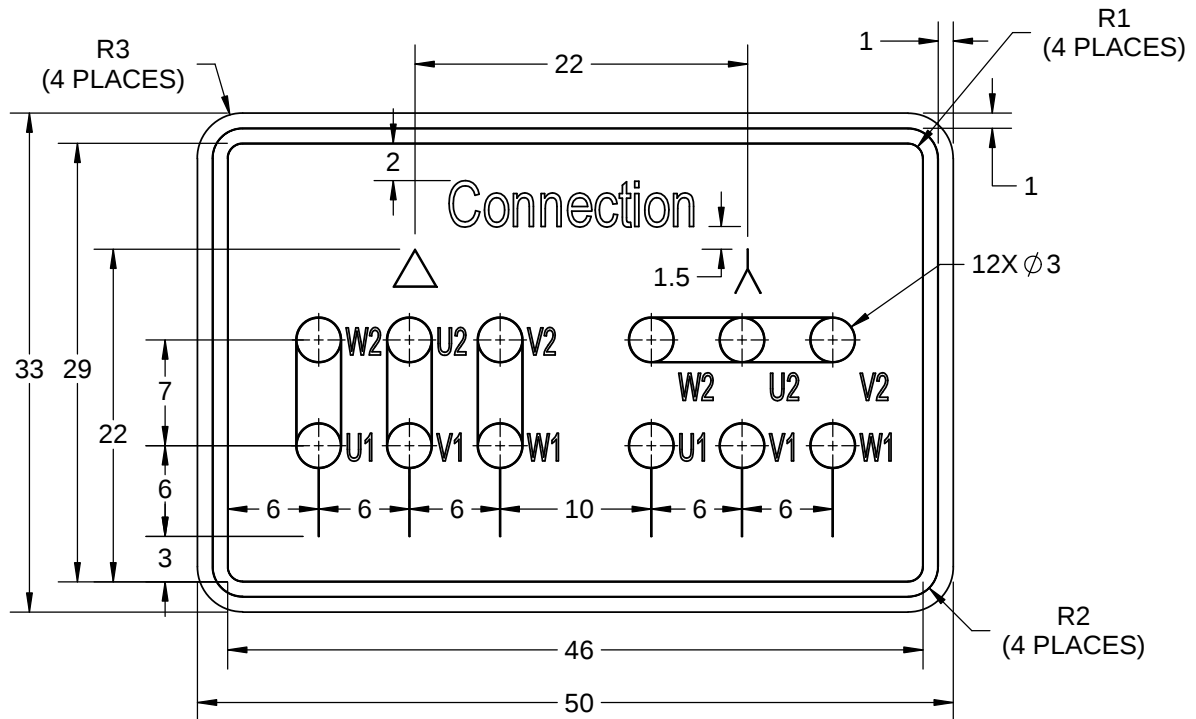

NOTES:

1. PRESSURE-SENSITIVE ADHESIVE COATED PAPER ON THE BACK OF SELF-ADHESIVE.
2. AT THE END OF YELLOW, WORDS, SYMBOLS, LETTERS ARE BLACK, BORDER IS BLACK.
3. THE TOLERANCE OF THE LINEAR SIZE OF THE TOLERANCE WITHOUT THE TOLERANCE BY THE TABLE.

8WD.442.2017

|  |                        |                                                                                                                 |                              |                 |
|--|------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------|-----------------|
|  | DRAWN BY<br>SN         |  Regal Beloit America, Inc. |                              |                 |
|  | DATE<br>16/12/2016     |                                                                                                                 |                              |                 |
|  | APPROVED BY<br>SBD     | DESCRIPTION<br>CONN DIAGRAM-NAMEPLATE                                                                           |                              |                 |
|  | DATE<br>16/12/2016     |                                                                                                                 |                              |                 |
|  | REFERENCE              | MATERIAL                                                                                                        | PROCESS/FINISH               |                 |
|  | THIRD ANGLE PROJECTION | SIZE<br>A                                                                                                       | DRAWING NUMBER<br>8442000085 | SHEET<br>1 OF 1 |

**Model No.** TCA1101AF121GAC010

| U<br>(V) | $\Delta$ / Y<br>Conn | f<br>[Hz] | P<br>[kW] | P<br>[hp] | I<br>[A] | n<br>[RPM] | T<br>[Nm] | IE<br>Class | % EFF at __ load |      |       |       | PF at __ load |       |       | $I_A/I_N$<br>[pu] | $T_A/T_N$<br>[pu] | $T_K/T_N$<br>[pu] |
|----------|----------------------|-----------|-----------|-----------|----------|------------|-----------|-------------|------------------|------|-------|-------|---------------|-------|-------|-------------------|-------------------|-------------------|
|          |                      |           |           |           |          |            |           |             | 5/4FL            | FL   | 3/4FL | 1/2FL | FL            | 3/4FL | 1/2FL |                   |                   |                   |
| 380      | $\Delta$             | 50        | 110       | 150       | 199.49   | 2983       | 358.07    | IE3         | -                | 95.2 | 95.2  | 92.7  | 0.88          | 0.85  | 0.78  | 7.2               | 2.0               | 3.6               |
|          |                      |           |           |           |          |            |           |             |                  |      |       |       |               |       |       |                   |                   |                   |

|                                  |                             |                                           |                                             |
|----------------------------------|-----------------------------|-------------------------------------------|---------------------------------------------|
| Motor type                       | TCA                         | Degree of protection                      | IP 55                                       |
| Enclosure                        | TEFC                        | Mounting type                             | IM B5                                       |
| Frame Material                   | Cast Iron                   | Cooling method                            | IC 411                                      |
| Frame size                       | 315S                        | Motor weight - approx.                    | 977 kg                                      |
| Duty                             | S1                          | Gross weight - approx.                    | 1022 kg                                     |
| Voltage variation *              | $\pm 10\%$                  | Motor inertia                             | 2.2274 kgm <sup>2</sup>                     |
| Frequency variation *            | $\pm 5\%$                   | Load inertia                              | Customer to Provide                         |
| Combined variation *             | 10%                         | Vibration level                           | 2.8 mm/s                                    |
| Design                           | N                           | Noise level ( 1meter distance from motor) | 83 dB(A)                                    |
| Service factor                   | 1.0                         | No. of starts hot/cold/Equally spread     | 2/3/4                                       |
| Insulation class                 | F                           | Starting method                           | DOL                                         |
| Ambient temperature              | -20 to +40 °C               | Type of coupling                          | Direct                                      |
| Temperature rise (by resistance) | 80 [ Class B ] K            | LR withstand time (hot/cold)              | 15/30 s                                     |
| Altitude above sea level         | 1000 meter                  | Direction of rotation                     | Bi-directional                              |
| Hazardous area classification    | NA                          | Standard rotation                         | Clockwise form DE                           |
| Zone classification              | NA                          | Paint shade                               | RAL 5014                                    |
| Gas group                        | NA                          | Accessories                               |                                             |
| Temperature class                | NA                          | Accessory - 1                             | PTC 150°C                                   |
| Rotor type                       | Aluminum Die cast           | Accessory - 2                             | -                                           |
| Bearing type                     | Anti-friction ball          | Accessory - 3                             | -                                           |
| DE / NDE bearing                 | 6316 C3 / 6316 C3           | Terminal box position                     | TOP                                         |
| Lubrication method               | Regreasable                 | Maximum cable size/conduit size           | 1R x 3C x 240mm <sup>2</sup> /2 x M63 x 1.5 |
| Type of grease                   | CHEVRON SRI-2 or Equivalent | Auxiliary terminal box                    | NA                                          |

 $I_A/I_N$  - Locked Rotor Current / Rated Current

 $T_K/T_N$  - Breakdown Torque / Rated Torque

 $T_A/T_N$  - Locked Rotor Torque / Rated Torque

**NOTE**

All performance values at rated voltage and frequency.

All performance parameters are subjected to standard tolerance as per IEC 60034-1

\* Voltage, Frequency and combine variation are as per IEC60034-1

Technical data are subject to change. There may be discrepancies between calculated and name plate values.


| Efficiency | Europe | China                 | India | Aus/Nz | Brazil | Global IEC    |
|------------|--------|-----------------------|-------|--------|--------|---------------|
| Standards  | -      | GB 18613-2012 Grade 2 | -     | -      | -      | IEC: 60034-30 |

**Model No.** TCA1101AF121GAC010


| Enclosure | U<br>(V) | Δ / Y<br>Conn | f<br>(Hz) | P<br>[kW] | P<br>[hp] | I<br>[A] | n<br>[RPM] | T<br>[kgm] | T<br>[Nm] | IE<br>Class | Amb<br>[°C] | Duty | Elevation<br>[m] | Inertia<br>[kg-m <sup>2</sup> ] | Weight<br>[kg] |
|-----------|----------|---------------|-----------|-----------|-----------|----------|------------|------------|-----------|-------------|-------------|------|------------------|---------------------------------|----------------|
| TEFC      | 380      | Δ             | 50        | 110       | 150.0     | 199.5    | 2983       | 36.51      | 358.07    | IE3         | 40          | S1   | 1000             | 2.2274                          | 977            |

**Motor Load Data**

| Load Point   |       | NL   | 1/4FL | 1/2FL | 3/4FL | FL    | 5/4FL |
|--------------|-------|------|-------|-------|-------|-------|-------|
| Current      | A     | 60.7 | 77.2  | 112.5 | 150.9 | 199.5 |       |
| Torque       | Nm    | 0.0  | 89.1  | 178.5 | 268.2 | 358.1 |       |
| Speed        | r/min | 3000 | 2996  | 2992  | 2987  | 2983  |       |
| Efficiency   | %     | 0.0  | 87.6  | 92.7  | 95.2  | 95.2  |       |
| Power Factor | %     | 9.1  | 59.7  | 78.0  | 85.0  | 88.0  |       |

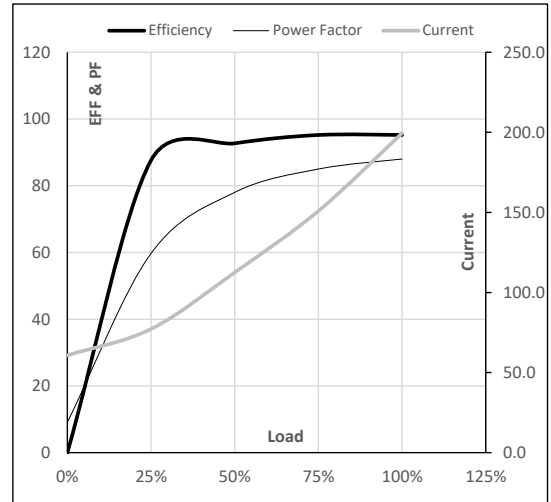**Performance vs Load Chart**

**Motor Speed Torque Data**
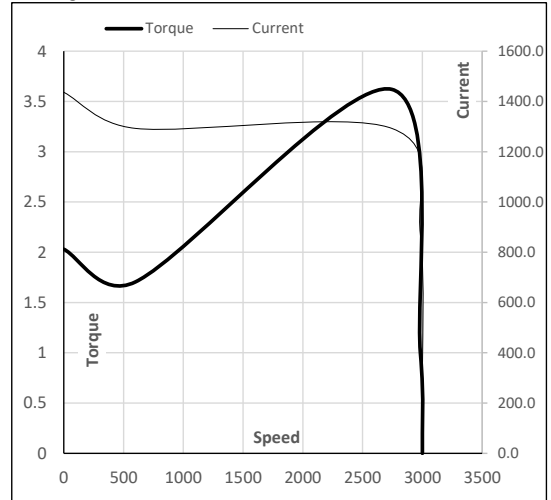
| Load Point |       | LR     | P-Up   | BD    | Rated | NL   |
|------------|-------|--------|--------|-------|-------|------|
| Speed      | r/min | 0      | 600    | 2744  | 2983  | 3000 |
| Current    | A     | 1436.4 | 1292.7 | 869.8 | 199.5 | 60.7 |
| Torque     | pu    | 2.0    | 1.7    | 3.6   | 1     | 0    |

**Starting Characteristics Chart**

**NOTE** Refer data sheet for applicable standard and tolerances on performance parameters

 Issued By  
Issued Date


Model No. TCA1101AF121GAC010

|           |     |       |      |      |       |       |       |       |        |       |      |      |           |                      |        |
|-----------|-----|-------|------|------|-------|-------|-------|-------|--------|-------|------|------|-----------|----------------------|--------|
| Enclosure | U   | Δ / Y | f    | P    | P     | I     | n     | T     | T      | IE    | Amb  | Duty | Elevation | Inertia              | Weight |
|           | (V) | Conn  | [Hz] | [kW] | [hp]  | [A]   | [rpm] | [kgm] | [Nm]   | Class | [°C] |      | [m]       | [kg-m <sup>2</sup> ] | [kg]   |
| TEFC      | 380 | Δ     | 50   | 110  | 150.0 | 199.5 | 2983  | 36.51 | 358.07 | IE3   | 40   | S1   | 1000      | 2.2274               | 977    |

Motor Speed Torque Data

|          |         |                |                |                |                |                |     |
|----------|---------|----------------|----------------|----------------|----------------|----------------|-----|
| Load     | FL      | I <sub>1</sub> | I <sub>2</sub> | I <sub>3</sub> | I <sub>4</sub> | I <sub>5</sub> | LR  |
| TWT Hot  | s 10000 | 54             | 39             | 27             | 24             | 22             | 15  |
| TWT Cold | s 10000 | 108            | 80             | 54             | 50             | 40             | 30  |
| Current  | pu 1    | 2              | 3              | 4              | 5              | 5.5            | 7.2 |

Thermal Characteristics Chart

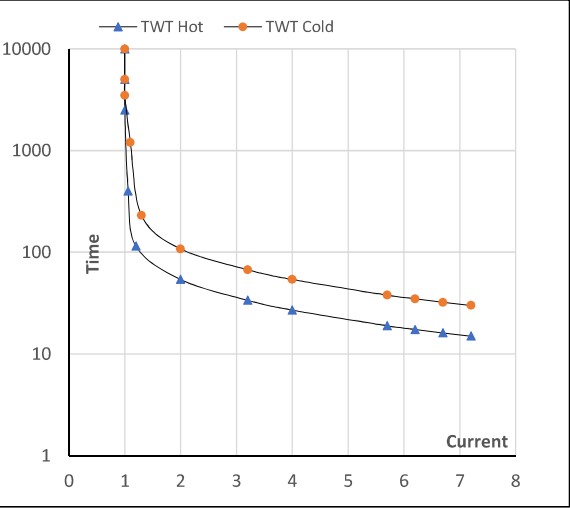

NOTE Refer data sheet for applicable standard and tolerances on performance parameters

Issued By  
Issued Date

