PRODUCT INFORMATION PACKET

marathon°

Model No: 182TTGCD16542 Catalog No: 5VYE9 3,1800,EPFC,182T,3/60/230/460

©2025 Marathon, All Rights Reserved.

marathon[°]

Nameplate Specifications


Phase	3	Output HP	3 Нр
Output KW	2.2 kW	Voltage	230/460 V
Speed	1762 r/min	Service Factor	1
Frame	182T	Enclosure	Explosion Proof Fan cooled
Thermal Protection	Thermostat	Efficiency	89.5 %
Ambient Temperature	40 °C	Frequency	60 Hz
Current	8.0/4.0 A	Power Factor	78
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	к
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6206
UL	UL Listed And CSA Certified	CSA	Y
CE	N	IP Code	54
Number of Speeds	1	Hazardous Location	EXP PROOF CL I GR C&D CL II GR F&G T3B

Technical Specifications


Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter	
Poles	4	Rotation	Reversible	
Resistance Main	4.15 O	Mounting	Rigid Base	
Motor Orientation	Horizontal	Drive End Bearing	Ball	
Opp Drive End Bearing	Ball	Frame Material	Cast Iron	
Shaft Type	Т	Assembly/Box Mounting	F1 ONLY	
Outline Drawing	035660-800	Connection Drawing	A-EE7308T	

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:05/07/2025

Uncontrolled Copy

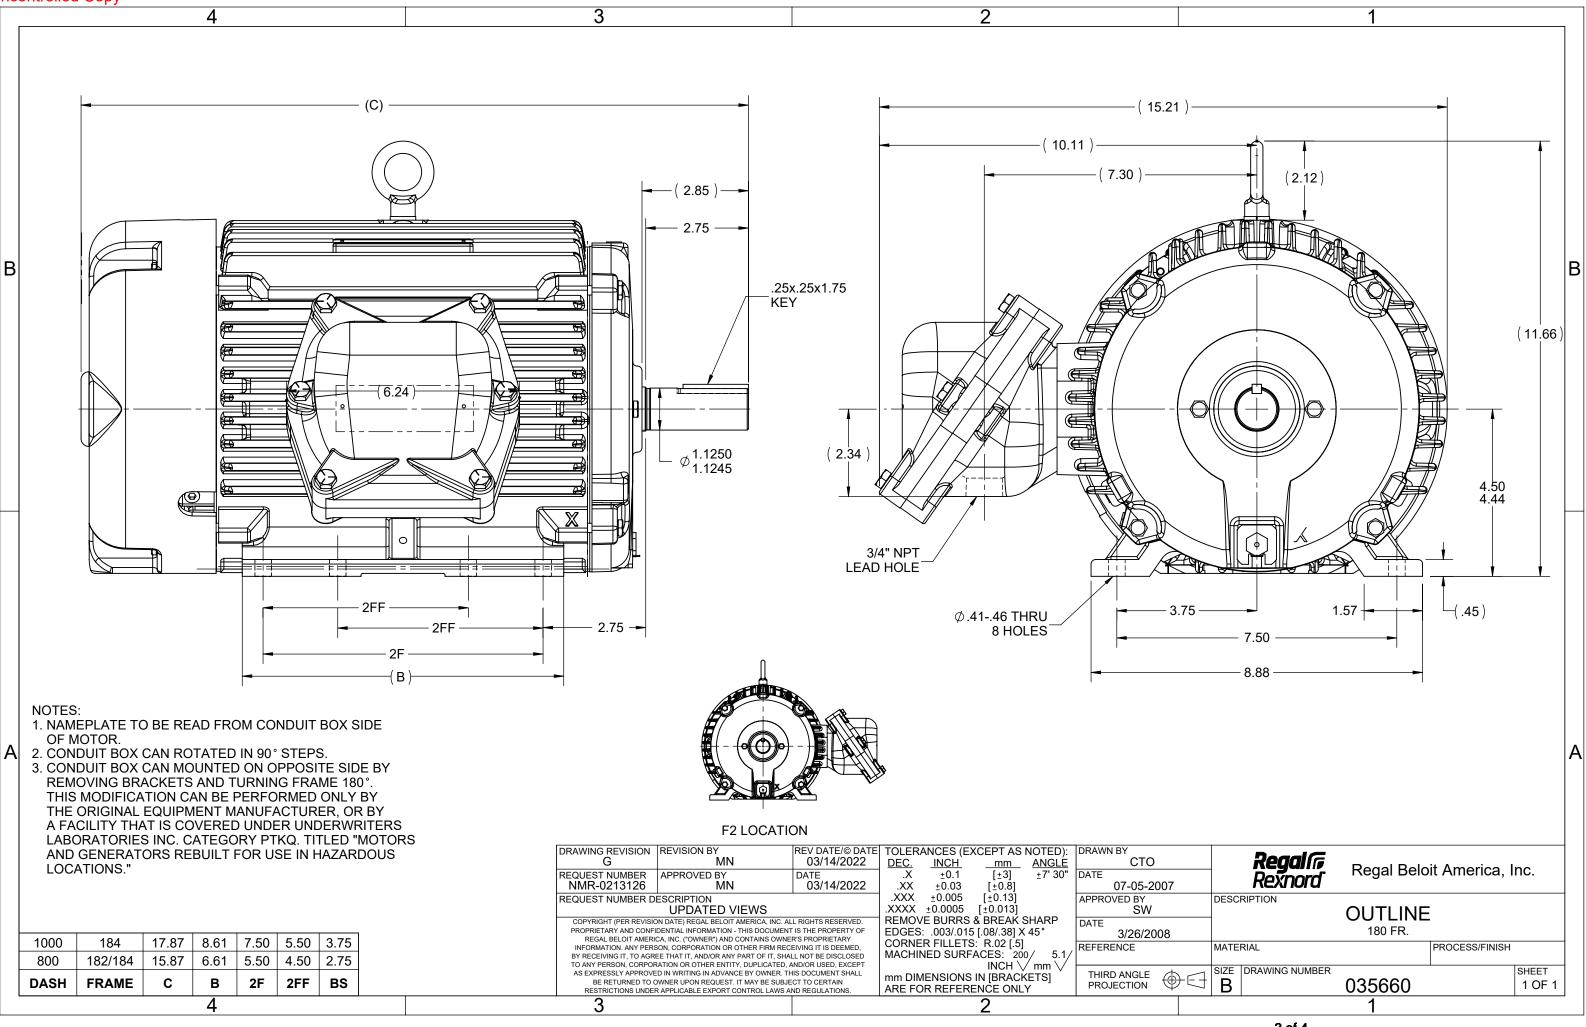

3 of 4

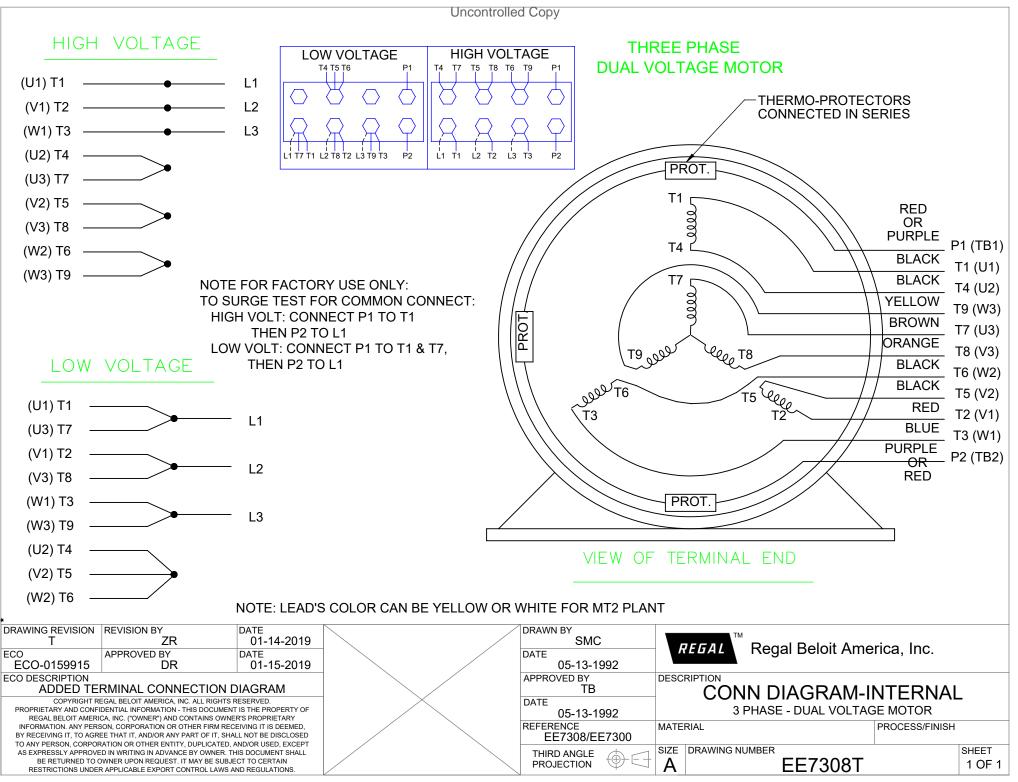

4 of 4