PRODUCT INFORMATION PACKET

Model No: 132247.00 Catalog No: 132247.00 Feather Picker Motor, 2 HP, 3 Ph, 60 Hz, 230/460 V, 1200 RPM, 112M Frame, TEFC



Regal and are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2022 Regal Rexnord Corporation, All Rights Reserved. MC017097E



1 of 6

Product Information Packet: Model No: 132247.00, Catalog No:132247.00 Feather Picker Motor, 2 HP, 3 Ph, 60 Hz, 230/460 V, 1200 RPM, 112M Frame, TEFC


Nameplate Specifications

Output HP	2 Нр	Output KW	1.5 kW
Frequency	60 Hz	Voltage	230/460 V
Current	6.4/3.2 A	Speed	1176 rpm
Service Factor	1.5	Phase	3
Efficiency	88.5 %	Power Factor	67
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	к
Frame	112M	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Ambient Temperature	40 °C
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205
UL	Recognized	CSA	Y
CE	Ν	IP Code	43
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	6	Rotation	Reversible
Resistance Main	5.4 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	IEC	Overall Length	14.96 in
Frame Length	9.50 in	Shaft Diameter	1.125 in
Shaft Extension	2.81 in	Assembly/Box Mounting	F1/F2 CAPABLE
Outline Drawing	035685-950	Connection Drawing	005010.01

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:09/07/2022

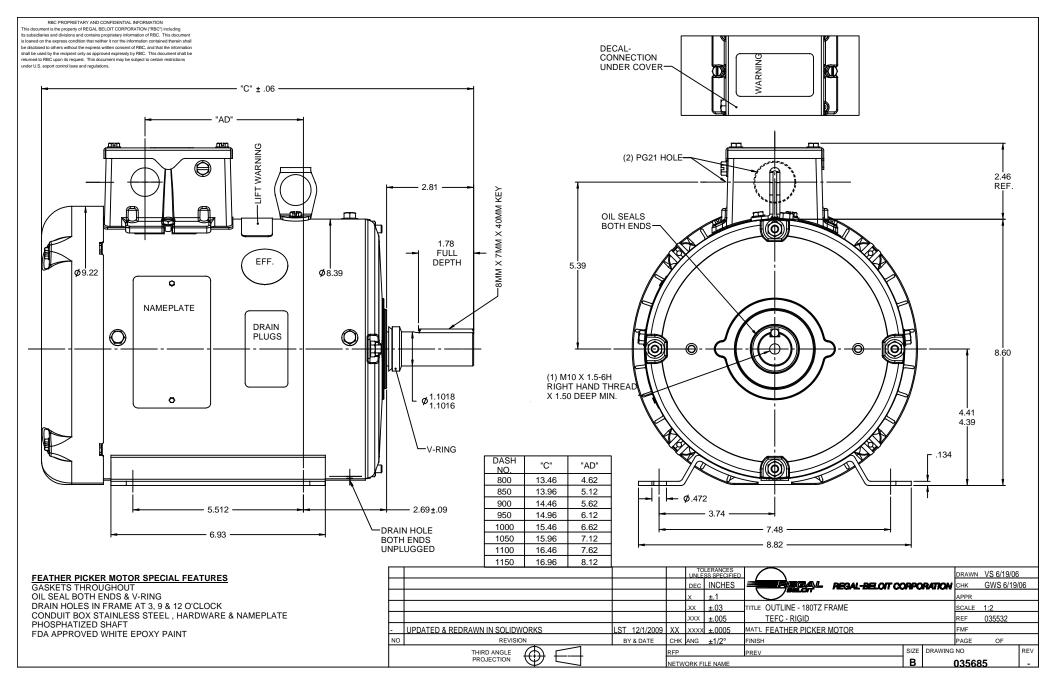

Uncontrolled Copy



Uncontrolled Copy



P.O. BOX 8003 WAUSAU, WI 54401-8003 PH. 715-675-3311

DATA VOLTS: 460

CERTIFICATION DATA SHEET

CONN. DIAGRAM: 005010.01 OUTLINE: 035685-950 WINDING: T8638				CAT #: 132247.00 FR 3									
				т	YPICAI	L МОТО	R PERFO	RMAN	CE DATA				
HP	ĸw	SYNC RPM		FL RPM		FRAME		ENCLOSURE		ТҮРЕ	KVA COI	DE	DESIGN
2	1.5 1200		200	1175		112M		TEFC		TFW	к		В
PH	HZ	VOLTS		AMPS		START TYPE		DUTY		INSL	S.F.	AMB	ELEV.
3	60	23	0/460	6.4/3	.2	ACROSS	S THE LINE		CONT	F	1.15	40	3300
F	F.L. EFF	88.5		3/4 LD EFF	88.0		1/2 LD EFF	87.1	GTD EFF		ELECT. TY	PE	
-	F.L. PF	66.5		3/4 LD PF	58.9		1/2 LD PF	47.2	86.5		SQ CAGE IND		
F.L. TO	RQUE	l	R AMPS @	460 V L		R. TORQUE		B.D. TORQ		UE F.L. RISI		°C)	
9.0	LB-FT		20.5		16.8	LB-FT	187%	30.2	LB-FT	336%	32		
DDECCU			WER	ROTOR	WIZ2		OAD WK ²	0455		CTAD		MOT	
55	dBA	64	dBA		LB-FT ²	0	LB-FT ²	15 SEC.		STARTS/HOUR 2		MOTOR WGT	
55	UBA	04	UDA	\		0		15	320.		2	0	LD.
					*** SI	UPPLEME	ENTAL INFO	ORMATI	ON ***				
DE BRA	CKET			MOUNT			HAZARDOUS		DRIP				
TYP			CKET TYPE	TYPE	ORIENTATION DUTY		LOCATION		COVER	SCREENS	PAINT		
STAND	DARD	STAI	NDARD	RIGID	HORIZ	ONTAL	NO		NONE	NO	NONE	IITE - LE	ESON (EP
BEARI						<u> </u>						<u> </u>	
DEAN	ODE	GR	EASE	SHAFT	ТҮРЕ	SPEC	CIAL DE	SPE	CIAL ODE	SHAFT	MATERIAL	FRAME	MATERIAL
BALL	BALL												
6206	6205	POLY	REX EM	STANDA	RD IEC	N	ONE		NONE	1144 STRES	SPROOF (C-223)	ROLLI	ED STEEL
													PACE
THERMOSTATS PROTECTORS		WDG RTD's BRG RTD's				RMISTORS		NTROL	HEATERS				
NON	NE	Ν	IOT	NON	IE	N	ONE		NONE	F.	ALSE		NA
D1 (ahn	ao/nh)	B 2 (a)	hmo/nh)	V1 /ohm	o/nh)	V0 /o	hmo/nh)	Vm	(ahma/nh)	VIDDAT			LOAT
R1 (ohms/ph) 0		R2 (ohms/ph) 0		X1 (ohms/ph) 0		X2 (ohms/ph) 0		Xm (ohms/ph)		VIBRATION (in/sec) 0.150		ODE	
0			0	0			0		0		.150	. ·	JDL
*													
Ν									INVER	FER TORQUE:	NONE		
0									INV. HP SI	PEED RANGE:	NONE		
т													
E									ENCODER:	NONE			
S									NONE			NONE	
									NONE BRAKE:	NONE		NONE	PPK
										ONE	NONE		
	DATE:	2/19	9/2018						FT-LB:	-	NA		
		_/ (VOLTAGE:		ONE		HZ
								10.	Y-(LEESON				

Uncontrolled Copy

Date	e: 2/19/	2018		Data S	heet			132247.	00	
Duk		2010			SON					-
				Moto	r Load Data	®		D	Data @ 460	v
oad	0%	25%	50%	75%	100%	115%	125%	LR		
urrent (Amps)	1.94	2.05	2.32	2.70	3.2	3.5	3.7	20.5		
orque (ft-lb)	0.00	2.25	4.5	6.6	9.0	10.4	11.2	16.8		_
PM	1200	1194 80.3	1188 87.1	1182 88.0	1175 88.5	1,171 88.5	1168 87.9	0		_
fficiency (%) .F. (%)	6.1	29.1	47.2	58.9	66.5	69.8	71.5	0.0		_
		Motor Speed D	ata			1				
	LR	Pull-Up	BD	Rated	Idle					
peed (RPM)	0	21	1000	1175	1200		l	nformation Block		
urrent (Amps)	20.5	20.1	10.1	3.2	1.94	HP		2.0		
rque (ft-lb)	16.8	16.5	30.2	9.0	0.00	Sync. RPM		1200		
	 Efficiency (%) 	— P.F. (%)		Current (Amps)		Frame Enclosure		180 TEFC		
	Efficiency (70)	—— r.i. (70)		arrent (Amps)		Construction		TFW		
100.0					4.0	Voltage		230/460	V	
				//		Frequency		60	Hz	
90.0					3.5	Design		В		
						LR Code letter		K		
					3.0	Service Factor		1.15		
F 80.0		/				Temp Rise @ I	Ē	32	°C	
					2.5 M	Duty		CONT	<u>^</u>	
70.0					Р	Ambient Elevation		40 1,000	° C	
P F					S 2.0	Rotor/Shaft wk	2	0.00	feet Lb-Ft ²	
					2.0	Ref Wdg		T8638 FR		
60.0					1.5	Sound Pressur	e @1M	55	dBA	
					1.5					
50.0					1.0	VFD Rating		NONE	_	
					1.0	Outline Dwg			5685-950	
40.0						Conn. Diag Additional Spec	vifications:	00	5010.01	
					0.5	0	incations.			
						0				
					_	0	=		=)	
30.0	% 40%	60% 80%	100%	120% 1	0.0	0 		IV CKT (OHMS / PHAS		Yr
30.0 0% 20	% 40%	60% 80% LOAD	5 100%	120% 1	0.0 40%	R1 0.0000	EQU R2 0.0000	V CKT (OHMS / PHAS X1 0.0000	E) X2 0.0000	X I 0.00
	% 40%			Speed -		0.0000 urve	R2	X1	X2	
	35.0		5 100%	Speed -	40%	0.0000	R2	X1	X2	0.00
				Speed -	40%	0.0000 urve	R2	X1	X2 0.0000	0.00
				Speed -	40%	0.0000 urve	R2	X1	X2 0.0000	0.00
	35.0			Speed -	40%	0.0000 urve	R2	X1	X2 0.0000	0.00
	35.0			Speed -	40%	0.0000 urve	R2	X1	25.0	0.0
	35.0			Speed -	40%	0.0000 urve	R2	X1	25.0	0.0
	35.0			Speed -	40%	0.0000 urve	R2	X1	25.0 20.0	0.0
0% 20	35.0 30.0 25.0			Speed -	40%	0.0000 urve	R2	X1	25.0	0.0
0% 20	35.0			Speed -	40%	0.0000 urve	R2	X1	25.0 20.0	0.00
0% 20	35.0 30.0 25.0			Speed -	40%	0.0000 urve	R2	X1	25.0 20.0	0.0
0% 20	35.0 30.0 25.0			Speed -	40%	0.0000 urve	R2	X1	25.0 20.0 20.0 15.0	A M P S
0% 20	35.0 30.0 25.0 20.0			Speed -	40%	0.0000 urve	R2	X1	25.0 20.0	A M P S
0% 20	35.0 30.0 25.0 20.0 15.0			Speed -	40%	0.0000 urve	R2	X1	25.0 20.0 20.0 15.0	A M P S
0% 20	35.0 30.0 25.0 20.0			Speed -	40%	0.0000 urve	R2	X1	25.0 20.0 20.0 15.0	0.0 A M P S
0% 20	35.0 30.0 25.0 20.0 15.0			Speed -	40%	0.0000 urve	R2	X1	25.0 20.0 20.0 15.0	A M P S
0% 20	35.0 30.0 25.0 20.0 15.0			Speed -	40%	0.0000 urve	R2	X1	X2 0.0000 25.0 20.0 15.0 10.0	A M P S
0% 20	35.0 30.0 25.0 20.0 15.0 10.0			Speed -	40%	0.0000 urve	R2	X1	X2 0.0000 25.0 20.0 15.0 10.0	A M P S
0% 20	35.0 30.0 25.0 20.0 15.0 10.0			Speed -	40%	0.0000 urve	R2	X1	X2 0.0000 25.0 20.0 15.0 10.0	A M P S
0% 20	35.0 30.0 25.0 20.0 15.0 10.0			Speed -	40%	0.0000 urve	R2	X1	X2 0.0000 25.0 20.0 15.0 10.0	A M P S