# PRODUCT INFORMATION PACKET



Model No: 171841.60 Catalog No: 171841.60

Grain Stirring Motor, 15 & 10 HP, 3 Ph, 60 & 50 Hz, 208-230/460 & 190/380 V, 1800 & 1500 RPM,

254TZ Frame, TEFC









## Nameplate Specifications


Phase	3	Output HP	15 & 10 Hp
Output KW	11.2 & 7.5 kW	Voltage	208-230/460 & 190/380 V
Speed	1765 & 1475 rpm	Service Factor	1.15 & 1.15
Frame	254TZ	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	92.4 & 91.7 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	40-36/18 & 30.5/15.3 A	Power Factor	84
Duty	Continuous	Insulation Class	F
Design Code	Α	KVA Code	Н
Drive End Bearing Size	6309	Opp Drive End Bearing Size	6308
UL	Recognized	CSA	Υ
CE	Υ	IP Code	55
Number of Speeds	1		

# **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Wye Start Delta Run Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.129 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Single Special Extension	Overall Length	24.72 in
Shaft Diameter	1.625 in	Shaft Extension	4.99 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	CONSTANT 10:1/VARIABLE 10:1
Connection Drawing	004172.01	Outline Drawing	SS620864

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023




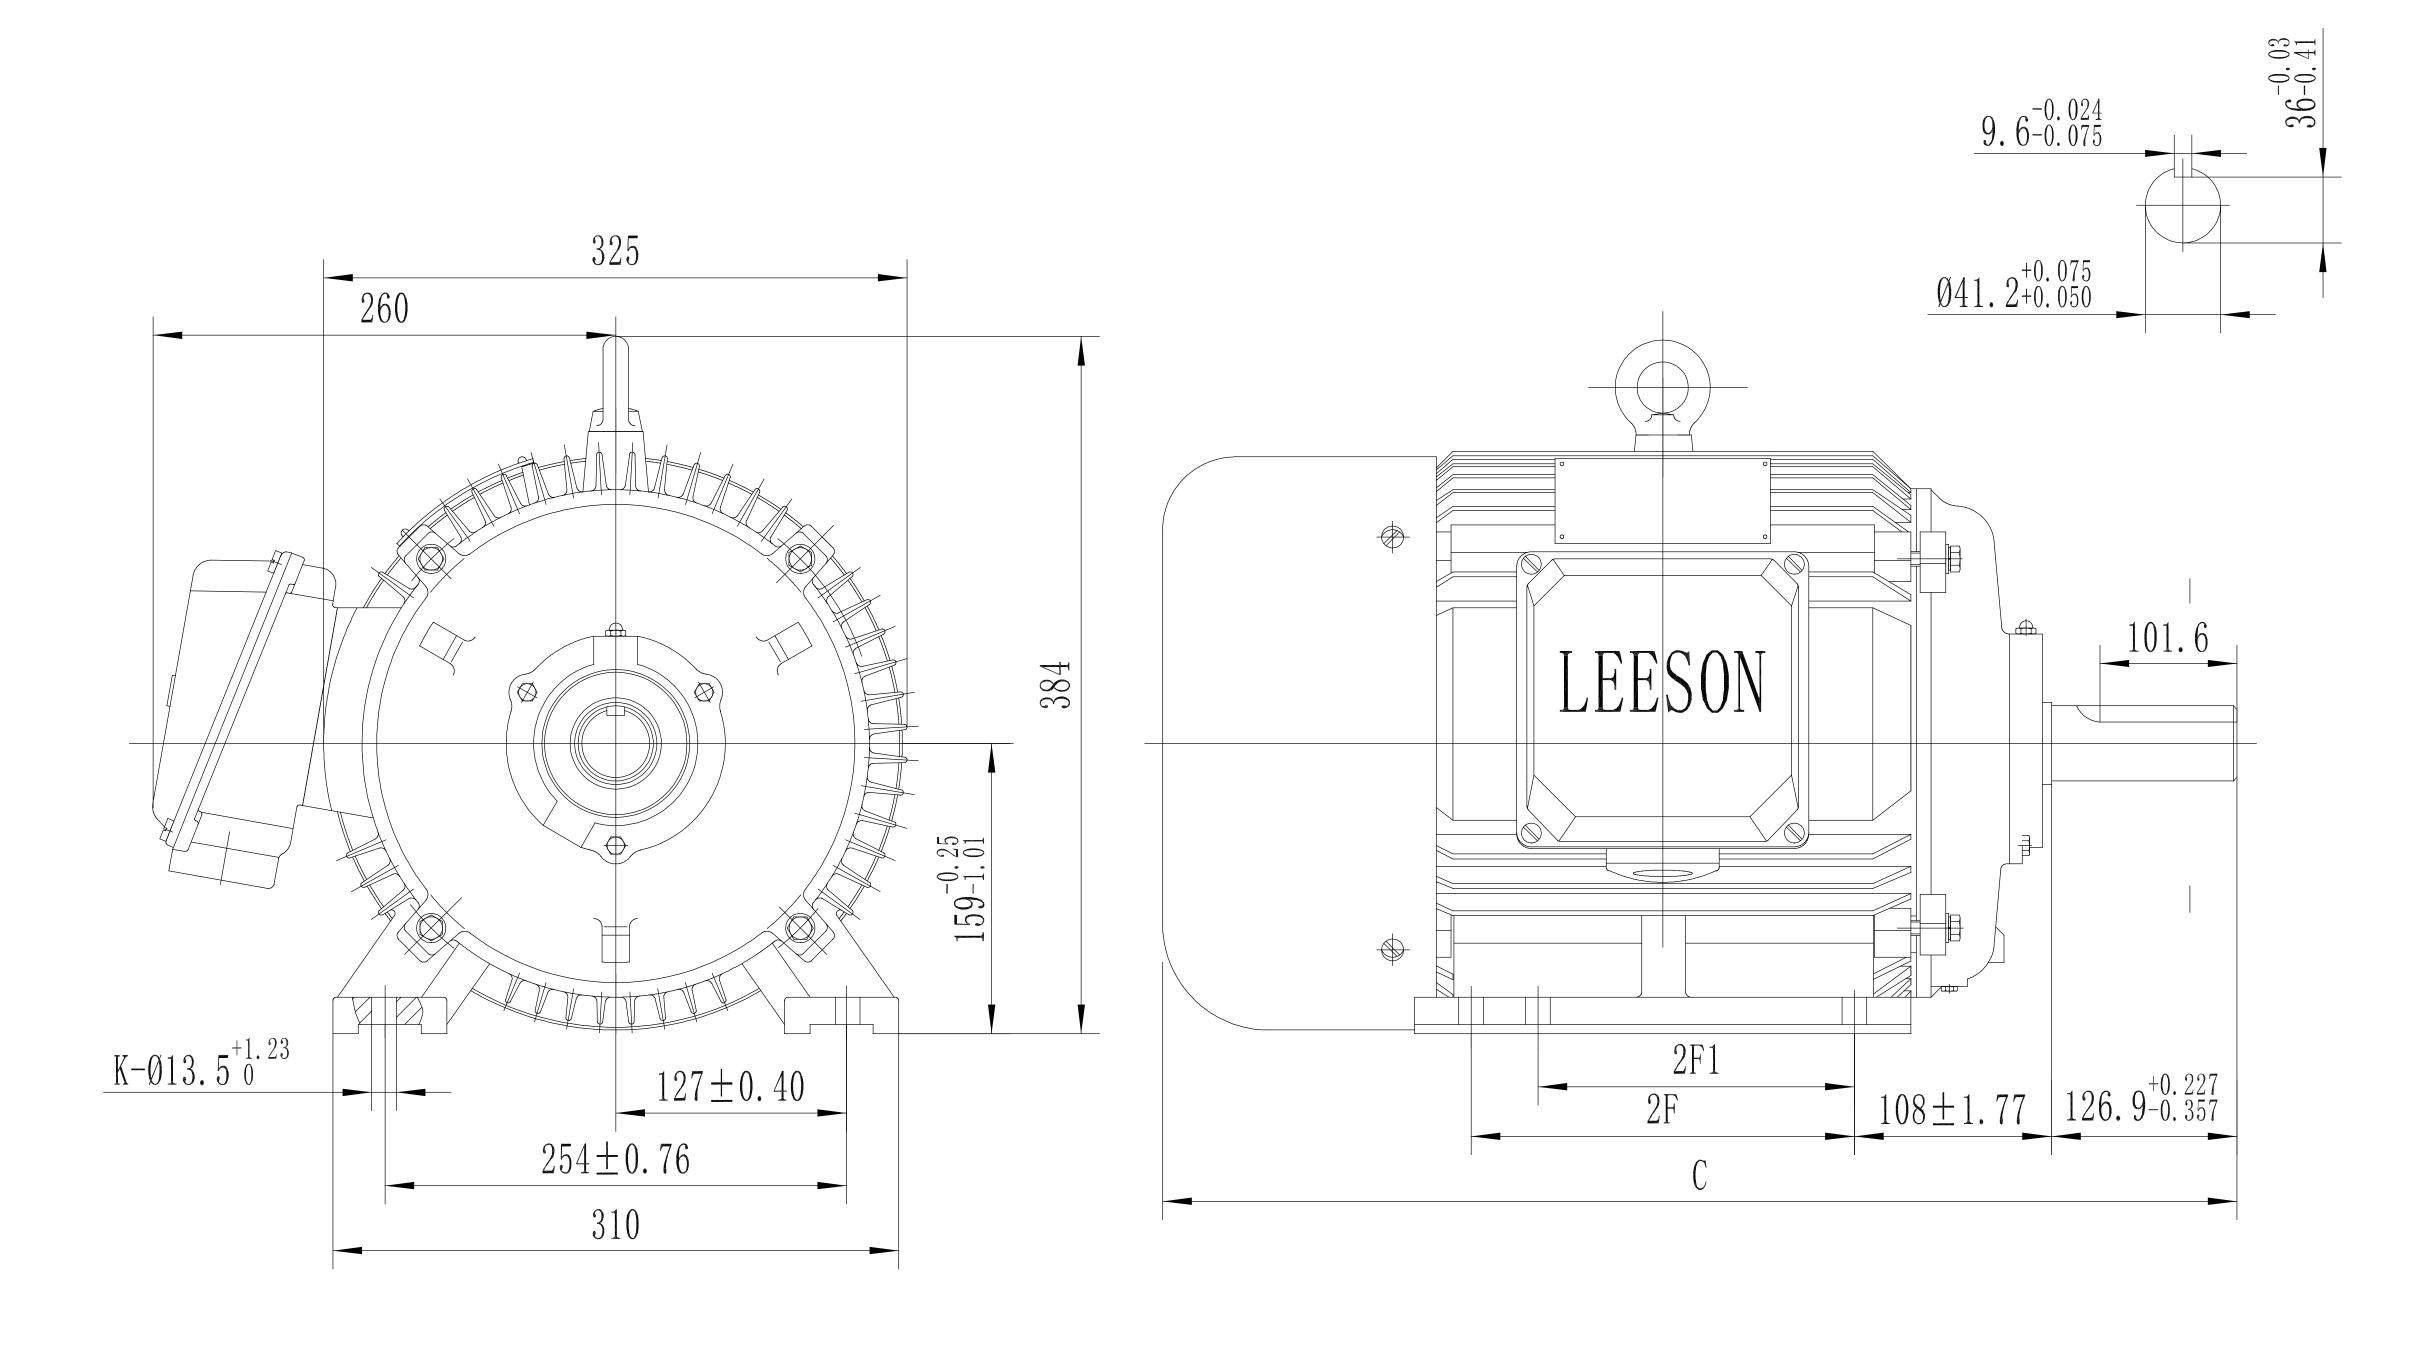


cat.no.	FRAME	2F	2F1	K	С
171841.60	N254TZ-4	$210^{+0.31}_{-1.21}$		4	628
171842.60	N256TZ-4	$254 \pm 0.76$	$210^{+0.31}_{-1.21}$	6	672

			UN	TOLERA LESS S	ANCES Specified				DRAWN	
			DE	EC. 11	NCHES	REGAL	Regal-Beloit Corr	СНК		
			.X	±.	.1		1,12 901 1	APPD		
			.×>	( ±.	.03	TITLE	OUTLINE N250TZ-4		SCALE	
			.×>	(X ±.	.005				REF	
А	RELEASED FOR PRODUCTION ECO-0138957	WGJ 2/1/2018	EMH .X>	XXX ±.	.0005	MAT'L.			FMF	
NO.	REVISION	BY & DATE	CHK A	VG ±1	1/2	FINISH			PREV	
	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUS		RFP			CAD FILE		SIZE DR	AWING NO.	REV.
	IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND IN' THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NO		DIST					В	SS620864	A

#### WYE - DELTA STARTING USEABLE ON 2,4 AND 6 POLE MOTORS.

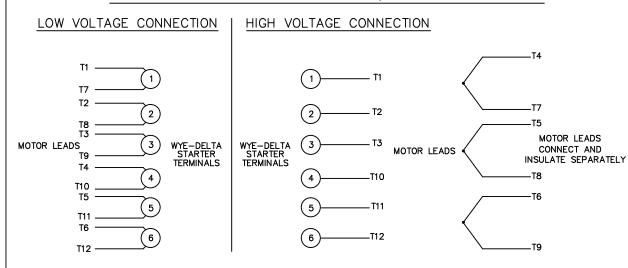

REFER TO THE WYE-DELTA STARTER CONNECTION INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

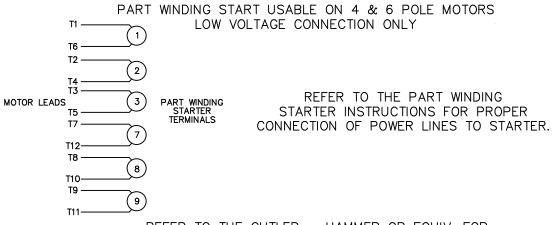

REFER TO THE CUTLER — HAMMER OR EQUIV. FOR PROPER SELECTION OF OVERLOAD HEATER COILS.

				UNLES	ERANCES S SPECIFIED				<b>ELECTRIC</b>	MOTOR	S	DRAWN	WLW 09/0	18/77
				DEC.	INCHES		3=5	<b>(•)</b>	GEARM	OTORS		снк	RPB 09/12,	/77
				.x	±.1				J AND D	PRIVES		APPD	JCW 09/12	<u>!</u> /77
03	REV'D LOW VOLTAGE CONN. LEADS PER ELEC.	BJB 06/07/00		.xx	±.01	TITLE	DELTA -	WYE	CONNECTION	DIAGRA	·Μ	SCALE	1=1	
02	ADDED T-STAT. NOTES PER ELECTRICAL	KMM 06/02/98		.xxx	±.005							REF		
01	REDRAWN TO CAD	DBT 06/02/97		.xxxx	±.0005	MAT'L.						FMF		
NO.	REVISION	BY & DATE	снк	ANG	±1/2°	FINISH						PREV		
	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT B		RFP			CAD FILE	0	041720	1	SIZE DRA				REV.
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT				DIST					A	004	172-	-01	03	

ROTATION CAN BE REVERSED BY INTERCHANGING ANY TWO LINE LEADS

• RED LEADS OR P1, P2, FOR N/C THERMOSTAT

ACROSS THE LINE START & RUN								
	LINE 1	LINE 2	LINE 3	JOIN & INSULATE SEPARATELY				
HIGH VOLT	T1,T12	T2,T10	T3,T11	(T4,T7) (T5,T8) (T6,T9)				
LOW VOLT	T1,T6 T7,T12	T2,T4 T8,T10	T3,T5 T9,T11					



# **EC Declaration of Conformity**

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 171841.60

(Model No. may contain prefix and/or suffix characters)

Catalog No : 171841.60

Rework No: N/A

### **Directives:**

Low Voltage Directive 2014/35/EU

### Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

<u>Authorized Representative in the Community:</u>

J. cerse

Julian Clark

Michael A. Logsdon Vice President, Technology

Marketing Engineer

Created on 09/01/2022

**C € 22**