

PRODUCT INFORMATION PACKET

marathon®
Motors

Model No: 182TTDB6082

Catalog No: GT0405

Globetrotter® Close-Coupled Pump Motor, 1.50 & 1 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V,
1200 & 1000 RPM, 182JM Frame, DP



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E


RegalRexnord

Nameplate Specifications

Phase	3	Output HP	1.50 & 1 Hp
Output KW	1.1 & 0.75 kW	Voltage	230/460 & 190/380 V
Speed	1180 & 983 rpm	Service Factor	1.15 & 1.0
Frame	182JM	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	86.5 & 85.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	4.4/2.2 & 3.5/1.75 A	Power Factor	69
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	J
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6203
UL	Recognized	CSA	Y
CE	Y	IP Code	22
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	8.05 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal Or Shaft Down	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JM	Overall Length	16.34 in
Shaft Diameter	0.875 in	Shaft Extension	4.26 in
Assembly/Box Mounting	F1 ONLY		
Connection Drawing	EE7308	Outline Drawing	SS620311-182T

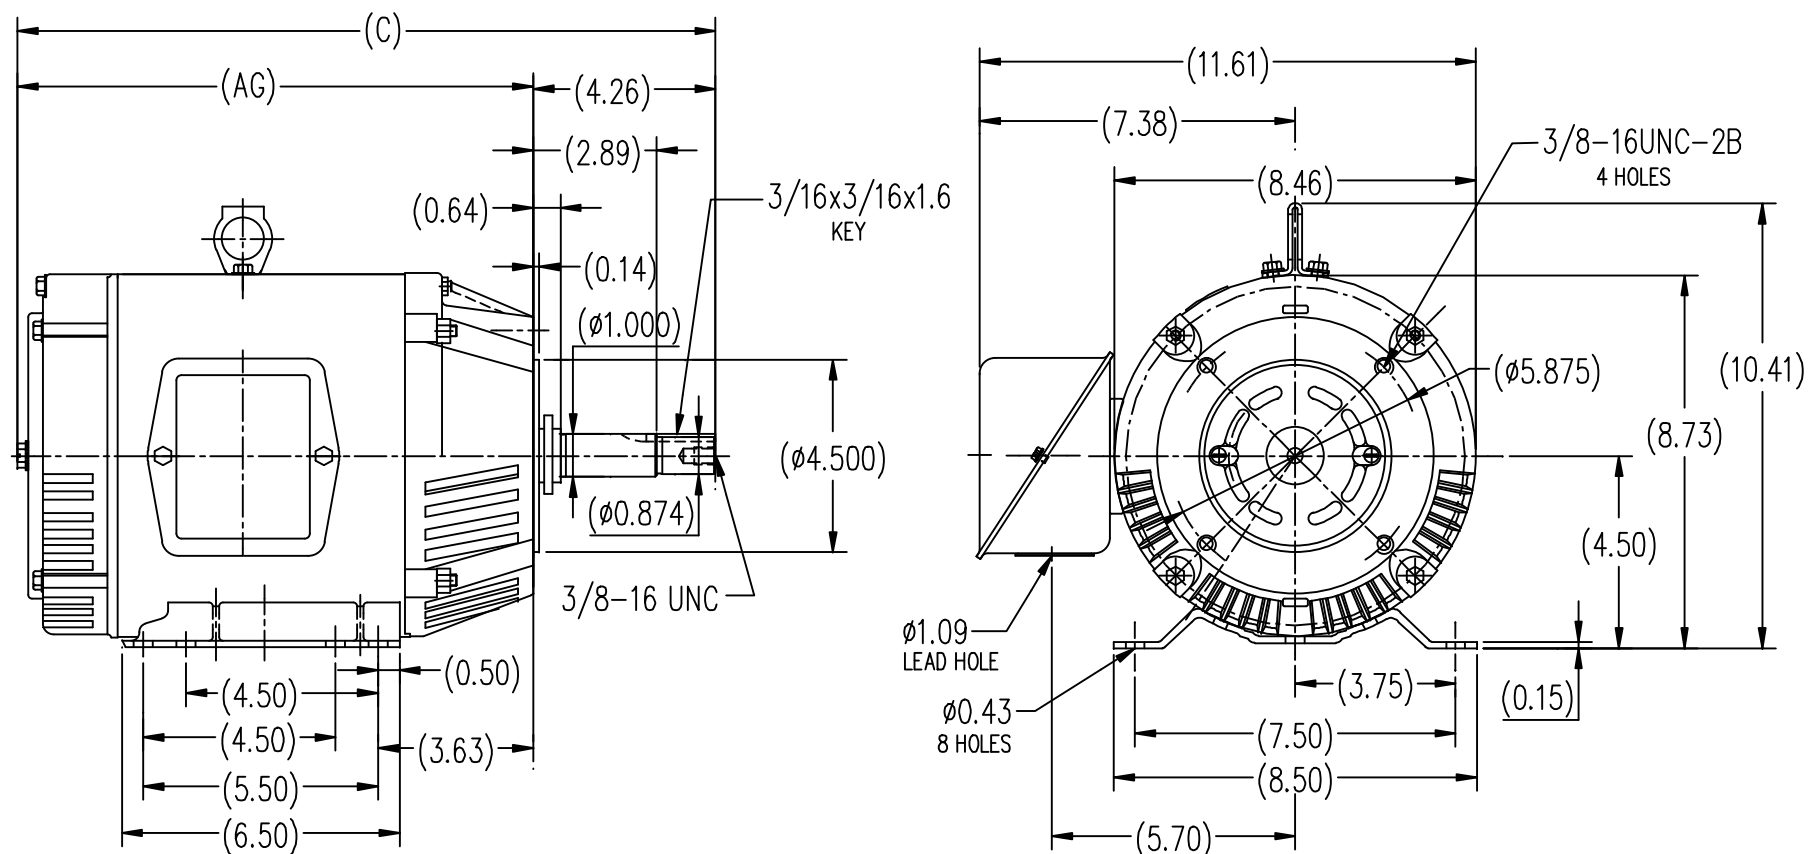

182T	12.09	16.34
184T	13.11	17.37
FRAME	AG	C

						 REGAL-BELOIT CORPORATION		DRAWN ZYH 6-9-2010	
								CHK	HZJ 6-9-2010
								APPD	CL 6-9-2010
								SCALE	1=4
								REF	
1	CORRECT THE ID FOR AG & C DIM WAS B1 & B	MOD1-09-2012		.XXXX	±.0005	MAT'L	OUTLINE 182/184T FR-JM-ROLLED STEEL		FMF HWADA
NO.	REVISION	BY & DATE	CHK	ANG	±1/2-	FINISH	PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT.						RFP	CAD FILE	SS620311	SIZE B
						DIST	DRAWING NO.		SS620311
									REV. 1



				TOLERANCES UNLESS SPECIFIED		 Regal Beloit America, Inc.	DRAWN RM 11/20/1990
5	CHG TO REGAL LOGO	SL 09/10/2015	AB	DEC.	INCHES		CHK ML 11/21/1990
4	REVISED IEC NOTATIONS	MSG 11/15/2011	CMN	.X	±.1		APPD SAS 04/24/2003
3	ADDED IEC NOTATIONS... (U1), (V1) ETC. MU95194	MSG 5/10/2010	MJS	.XX	±.02		SCALE 1=1
2	ADDED THE OPTIONAL CORD CONNECTION MU46318	RDH 04/24/2003	DRS	.XXX	±.005	TITLE CONNECTION DIAGRAM 3ø – DUAL VOLTAGE MOTOR	REF
1	REDRAWN	RM 11/20/1990		.XXXX	±.0005		FMF
NO.	REVISION	BY & DATE	CHK	ANG	±7°30"	FINISH	PREV
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT – DO NOT SCALE THIS PRINT			RFP		CAD FILE ee7308	SIZE	DRAWING NO. PAGE OF REV.
			DIST WP			A	EE7308 5

THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT
IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED
THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS PRINT

CERTIFICATION DATA SHEET

Model#: 182TTDB6082 AA

WINDING#: CHT18260008 NONE 1

CONN. DIAGRAM: EE7308

ASSEMBLY: F1/F2 CAPABLE

OUTLINE: SS620311

TYPICAL MOTOR PERFORMANCE DATA

HP	KW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
1 1/2&1	1.12&.75	1200	1180&983	182JM	DP	J	B

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60/50	230/460#190/ 380	4.4/2.2&3.5/1. 75	LINE OR INVERTER	CONTINUOU S	F7	1.15/1.0	40	3300

FULL LOAD EFF: 86.5&85.5	3/4 LOAD EFF: 86.5	1/2 LOAD EFF: 86.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 69&67	3/4 LOAD PF: 63	1/2 LOAD PF: 51	85.5	SQ CAGE INV RATED	2.5 / 1.3

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
6.7 LB-FT	30 / 15	11.2 LB-FT 167	20 LB-FT 298	25

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
54 dBA	64 dBA	0.38 LB-FT^2	32 LB-FT^2	25 SEC.	2	70 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL OR SHAFT DOWN	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT MATERIAL	FRAME MATERIAL
DE	OPE						
BALL	BALL	POLYREX EM	JM	NONE	NONE	1045 HOT ROLLED (C-204)	ROLLED STEEL
6206	6203						

THERMO-PROTECTORS				THERMISTORS	CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

* N O T E S *	INVERTER TORQUE: VARIABLE 10:1
	INV. HP SPEED RANGE: NONE
	ENCODER: NONE NONE NONE NONE NONE PPR
	BRAKE: NONE NONE NONE P/N NONE NONE NONE NONE FT-LB NONE V NONE Hz

DATE: 06/27/2017 01:33:02 AM
FORM 3531 REV.3 02/07/99
** Subject to change without notice.

Data Sheet

Date: 6/20/2017

Customer: _____

Attention: _____

Submitted by: FAREEDA DUDEKULA



182TTDB6082

Submittal

Data @ 460 V

Motor Load Data

Load	0%	25%	50%	75%	100%	115%	125%	LR	
Current (Amps)	1.25	1.35	1.60	1.90	2.20	2.50	2.70	15.0	
Torque (ft-lb)	0.00	1.65	3.3	5.0	6.7	7.7	8.4	11.2	
RPM	1200	1195	1190	1185	1180	1,178	1175	0	
Efficiency (%)		81.0	86.5	86.5	86.5	85.5	84.0		
P.F. (%)	6.0	32.0	51.0	63.0	69.0	71.0	73.0	37.0	

Motor Speed Data

	LR	Pull-Up	BD	Rated	Idle	Information Block																												
Speed (RPM)	0	600	1050	1180	1200	HP	1.5																											
Current (Amps)	15.0	13.0	9.0	2.20	1.25	Sync. RPM	1200																											
Torque (ft-lb)	11.2	8.0	20.0	6.7	0.00	Frame	182																											
— Efficiency (%) — P.F. (%) — Current (Amps) <table><caption>Graph Data</caption><thead><tr><th>Load (%)</th><th>Efficiency (%)</th><th>P.F. (%)</th><th>Current (Amps)</th></tr></thead><tbody><tr><td>25</td><td>81</td><td>0.0</td><td>1.2</td></tr><tr><td>50</td><td>86</td><td>0.4</td><td>1.5</td></tr><tr><td>75</td><td>86</td><td>0.6</td><td>1.8</td></tr><tr><td>100</td><td>86</td><td>0.7</td><td>2.1</td></tr><tr><td>125</td><td>84</td><td>0.7</td><td>2.6</td></tr></tbody></table>						Load (%)	Efficiency (%)	P.F. (%)	Current (Amps)	25	81	0.0	1.2	50	86	0.4	1.5	75	86	0.6	1.8	100	86	0.7	2.1	125	84	0.7	2.6	Enclosure	DP			
						Load (%)	Efficiency (%)	P.F. (%)	Current (Amps)																									
						25	81	0.0	1.2																									
						50	86	0.4	1.5																									
						75	86	0.6	1.8																									
						100	86	0.7	2.1																									
						125	84	0.7	2.6																									
						Construction	TDB																											
						Voltage	30/460#190/381V																											
						Frequency	60 Hz																											
						Design	B																											
						LR Code letter	J																											
						Service Factor	1.15																											
						Temp Rise @ FL	25 ° C																											
						Duty	CONT																											
						Ambient	40 ° C																											
						Elevation	1,000 feet																											
Rotor/Shaft wk ²	0.38 Lb-Ft ²																																	
Ref Wdg	CHT18260008 NONE																																	
Sound Pressure @ 1M	54 dBA																																	
VFD Rating	VARIABLE 10:1																																	
Outline Dwg	SS620311																																	
Conn. Diag	EE7308																																	
Additional Specifications:																																		
0																																		
0																																		
EQUIV CKT (OHMS / PHASE)																																		
R1	R2	X1	X2	Xm																														
4.5360	2.2680	13.6080	17.9550	217.3500																														

Speed -Torque Curve

