# PRODUCT INFORMATION PACKET



Model No: 184TTDBD6095 Catalog No: GT2508A

2 HP Close-Coupled Pump Motor, 3 phase, 1200 RPM, 575 V, 184JP Frame, ODP

**Close-Coupled Pump Motors** 



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2021 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: 184TTDBD6095, Catalog No:GT2508A 2 HP Close-Coupled Pump Motor, 3 phase, 1200 RPM, 575 V, 184JP Frame, ODP




### Nameplate Specifications


Output HP	2 Hp	Output KW	1.5 kW
Frequency	60 Hz	Voltage	575 V
Current	2.6 A	Speed	1175 rpm
Service Factor	1.15	Phase	3
Efficiency	87.5 %	Power Factor	70
Duty	Continuous	Insulation Class	F
Design Code	A	KVA Code	M
Frame	184JP	Enclosure	Drip Proof
Thermal Protection	No	Ambient Temperature	40 °C
Drive End Bearing Size	6307	Opp Drive End Bearing Size	6205
UL	Recognized	CSA	Υ
CE	Υ	IP Code	22
Number of Speeds	1		

## **Technical Specifications**

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Line Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	6.08 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	JP	Shaft Diameter	1.250 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	CONSTANT 2:1/VARIABLE 10:1
Connection Drawing	EE7300	Outline Drawing	SS600205-200

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:12/10/2021

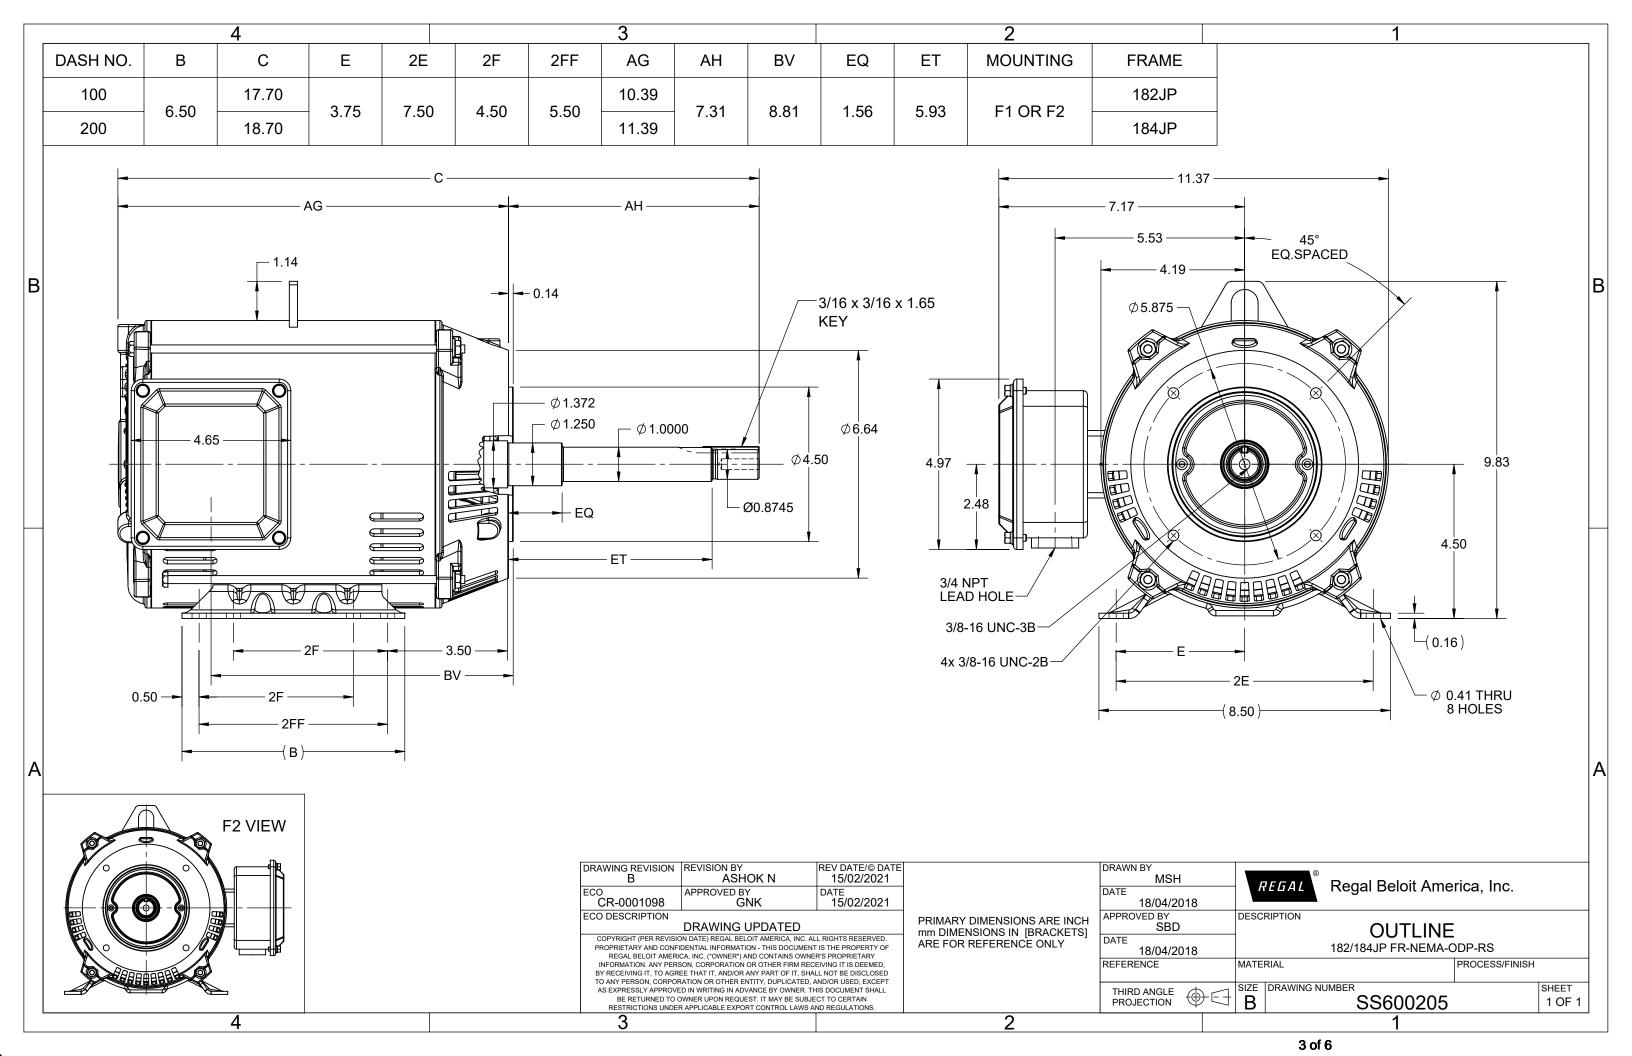

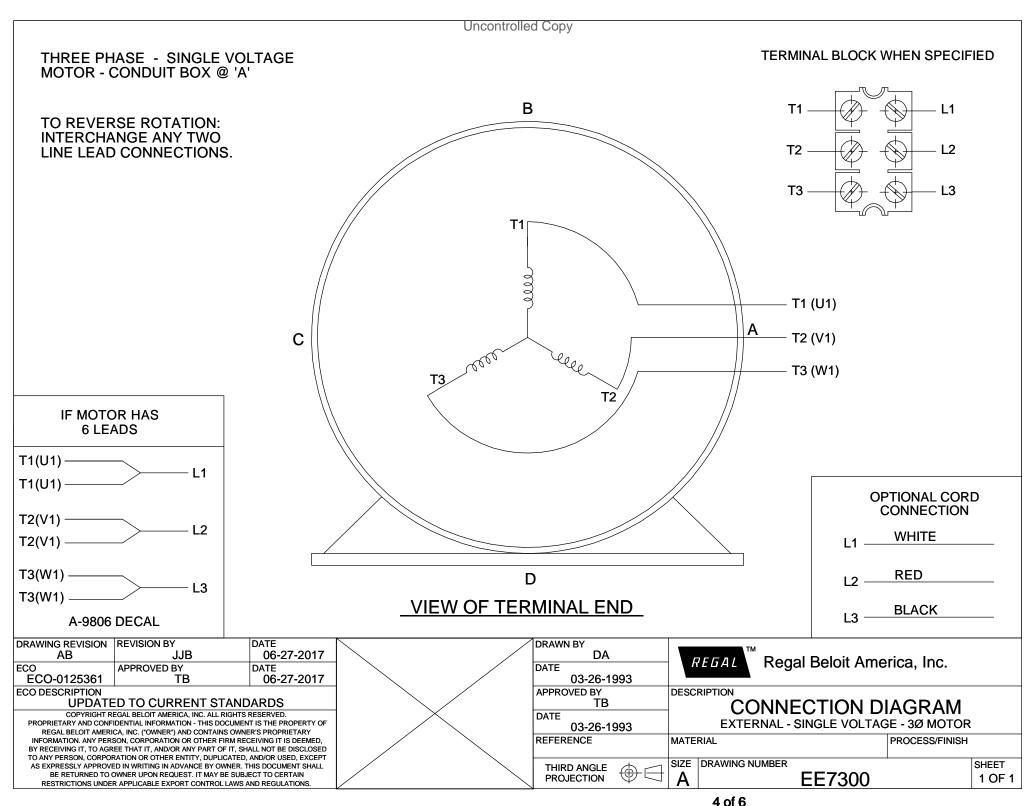

**CUSTOMER:** 

ORDER #:



P.O. BOX 8003 **WAUSAU, WI 54401-8003** PH. 715-675-3311

**CERTIFICATION DATA SHEET CUSTOMER PO#:** 

**MODEL #:** 184TTDBD6095 AΑ

CONN. DIAGRAM: EE7300 **CUSTOMER PART #: OUTLINE:** SS600205-184JP

**MOUNTING:** F1/F2 CAPABLE **WINDING #:** HE31126011

### **TYPICAL MOTOR PERFORMANCE DATA**

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
2	1.49	1200	1175	184JP	DP	L	В

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	АМВ°С
3	60	575	2.3	LINE OR INVERTER	CONTINUOUS	F7	1.15	40

FULL LOAD EFF: 87.5	<b>3/4 LOAD EFF:</b> 87.5	1/2 LOAD EFF: 85.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF: 73.5	<b>3/4 LOAD PF:</b> 66	<b>1/2 LOAD PF:</b> 53.5	86.5	SQ CAGE INV RATED

F.L. TORQUE LOCKED ROTOR AMPS		L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
8.9 <b>LB-FT</b>	20	17.8 <b>LB-FT</b> 200 %	25.8 <b>LB-FT</b> 290 %	30

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
54 <b>dBA</b>	64 <b>dBA</b>	0.6 <b>LB-FT^2</b>	32 <b>LB-FT^2</b>	25 <b>SEC.</b>	2	84 LBS.

#### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	PROVISIONS ONLY	NONE	BLUE (EPOXY)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE SPECIAL ODE		SHAFT	FRAME	
DE	ODE	GREASE	ASE SHAFITYPE SPECIAL D		SPECIAL ODE	MATERIAL	MATERIAL	
BALL	BALL	DOLVDEY EM	10	NONE	NONE	1045 HOT BOLLED (C 204)	DOLLED CTEEL	
6307	6205	POLYREX EM	JP	NONE	NONE	1045 HOT ROLLED (C-204)	ROLLED STEEL	

	THERMO-PROTECTORS					SPACE HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL	SPACE HEATERS	
NONE	NOT	NONE	NONE	NONE	FALSE	NONE <b>VOLTS</b>	

**INVERTER TORQUE:** 

CONSTANT 2:1/VARIABLE 10:1 INV. HP SPEED RANGE: NONE

ENCODER: NONE 0 NONE NONE

NONE NONE PPR

**BRAKE:** NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

PREPARED BY: Dinesh Suddula **DATE:** 02/13/2019 06:22:01 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

Ν

Ε

S

