# **PRODUCT INFORMATION PACKET**

Model No: 184TTDW7287 Catalog No: Y486A Multispeed Motor, 5 & 1.25 HP, 3 Ph, 60 & 60 Hz, 200-230 & 200-230 V, 1800 & 1800 RPM, 184T Frame, DP



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Fregal Rexnord

marathon<sup>®</sup>

Motors



Product Information Packet: Model No: 184TTDW7287, Catalog No:Y486A Multispeed Motor, 5 & 1.25 HP, 3 Ph, 60 & 60 Hz, 200-230 & 200-230 V, 1800 & 1800 RPM, 184T Frame, DP

# marathon®


# Nameplate Specifications

Phase	3	Output HP	5 & 1.25 Hp
Output KW	3.7 & 0.93 kW	Voltage	200-230 & 200-230 V
Speed	1755 & 875 rpm	Service Factor	1.15 & 1.15
Frame	184T	Enclosure	Drip Proof
Thermal Protection	No Protection	Efficiency	85.5 & 75 %
Ambient Temperature	40 °C	Frequency	60 & 60 Hz
Current	14.5-13.8 & 5.6-6 A	Power Factor	78
Duty	Continuous	Insulation Class	F
Design Code	1VT	KVA Code	J
Drive End Bearing Size	6206	Opp Drive End Bearing Size	6205
UL	Recognized	CSA	Y
CE	Y	IP Code	22
Number of Speeds	2		


# **Technical Specifications**

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4/8	Rotation	Reversible
Resistance Main	0 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	Т	Overall Length	14.19 in
Frame Length	10.00 in	Shaft Diameter	1.125 in
Shaft Extension	2.81 in	Assembly/Box Mounting	F1 ONLY
Outline Drawing	035539-1000	Connection Drawing	005200.01ME

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:06/22/2023

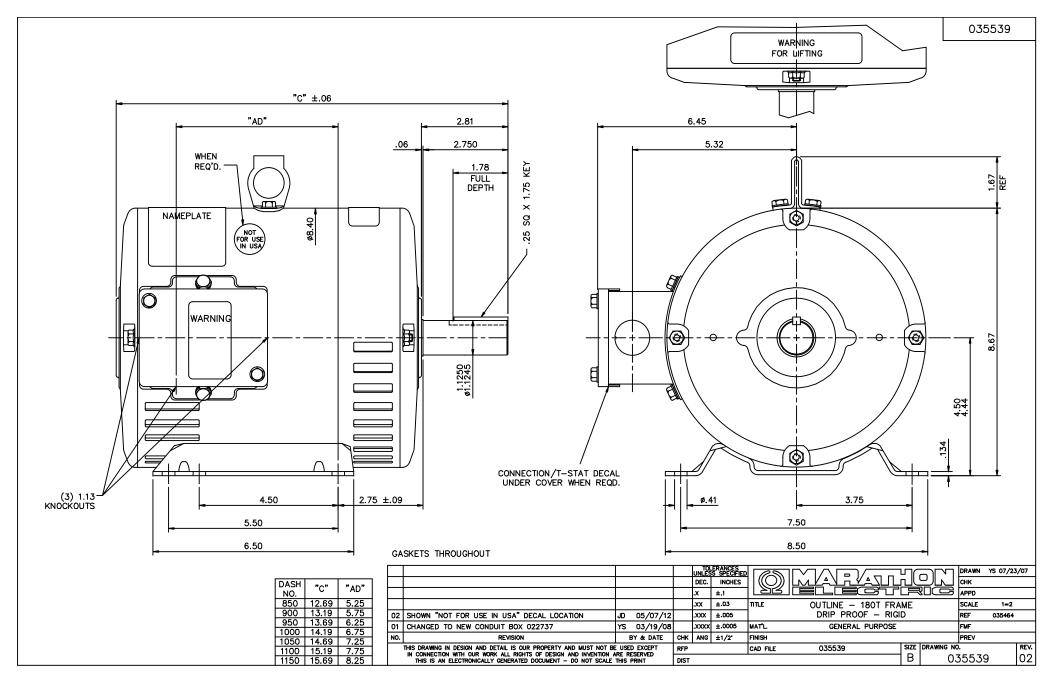

3 of 6

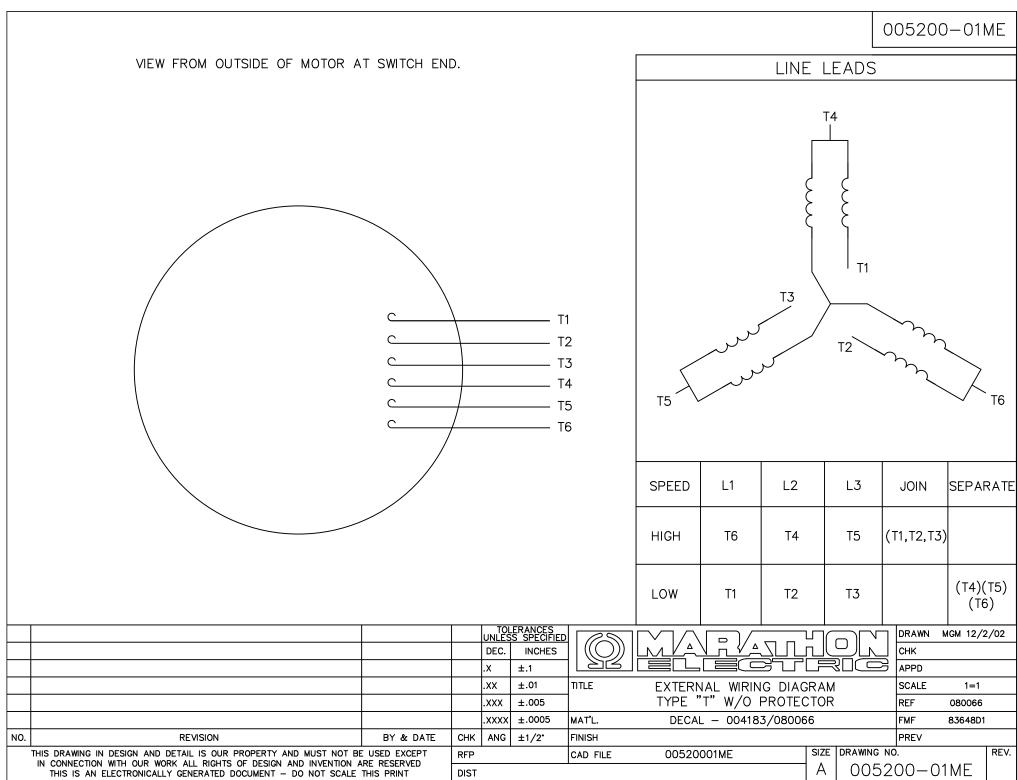

6/29/2007 2:12:15 PM -

#### **CERTIFICATION DATA SHEET**

Model#:	184TTDW7287 AA	WINDING#:	T8(4-8)18 NONE 1
CONN. DIAGRAM:	005200.01ME	ASSEMBLY:	F1 ONLY
OUTLINE:	035539-1000		

### TYPICAL MOTOR PERFORMANCE DATA

HP		ĸw	SYNC	. RPM	F.L. RPM	FRAME	EN	CLOSURE	KVA C	ODE	DESIGN
5&1 1/4	:	3.70&.93	90	00	1755&875	184T		DP	J		1VT
РН	Hz	vo	LTS	FL AMPS	START TYPE	DUTY	INSL	. s	.F	AMB°C	ELEVATION
3	60/60	200	-230 1.	4.5-13.8&5.6-	ACROSS THE	CONTINUOU	F4	1.15	/1.15	40	3300
				6	LINE	S					
FULL LOAD		3/4 1 0 4 0	EFF: 76.5	5 1/21.0	AD EFF: 71.7	GTD. EF	E	FLEC	ТҮРЕ	NO	LOAD AMPS

85.5&75					
FULL LOAD PF: 78&52	3/4 LOAD PF: 41.2	1/2 LOAD PF: 31	75.5	SQ CAGE IND RUN	5

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
7.5 LB-FT	23.4	16.87 LB-FT 225	21.49 LB-FT 287	70

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
0 dBA	10 dBA	0 LB-FT^2	0 LB-FT^2	10 SEC.	0	0 LBS.

# \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEAF	RINGS	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	т	NONE	NONE	1144	ROLLED STEEL
6206	6205					STRESSPROOF	
						(C-223)	

	THERMO-PF	ROTECTORS		THERMISTORS	CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: NONE INV. HP SPEED RANGE: NONE						
	ED KAP	NGE: NONE				
ENCODER:	NONE					
NONE NO	NE					
NONE NO	NE PPR					
BRAKE: N	ONE	NONE				
NONE	P/N NO	ONE				
NONE	NONE					
NONE FT-L	В	NONE V	NONE Hz			

DATE: 06/28/2017 06:48:57 AM

FORM 3531 REV.3 02/07/99

\*\* Subject to change without notice.

- \* N
- O T
- Е
- S \*

## Uncontrolled Copy

