
# **PRODUCT INFORMATION PACKET**





Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E



marathon<sup>®</sup>

Motors





Product Information Packet: Model No: 184TTFW16076, Catalog No:E2108 XRI® General Purpose General Purpose Motor, 2 & 1.50 HP, 3 Ph, 60 & 50 Hz, 230/460 & 190/380 V, 1200 & 1000 RPM, 184T Frame, TEFC

# marathon®


# Nameplate Specifications


		2 & 1.50 Hp
1.5 & 1.1 kW	Voltage	230/460 & 190/380 V
1175 & 975 rpm	Service Factor	1.15 & 1.15
184T	Enclosure	Totally Enclosed Fan Cooled
No Protection	Efficiency	88.5 & 85 %
40 °C	Frequency	60 & 50 Hz
6.4/3.2 & 7/3.5 A	Power Factor	66.5
Continuous	Insulation Class	F
В	KVA Code	к
6206	Opp Drive End Bearing Size	6205
Recognized	CSA	Y
Y	IP Code	43
1		
	1175 & 975 rpm 184T No Protection 40 °C 6.4/3.2 & 7/3.5 A Continuous B 6206 Recognized Υ	1175 & 975 rpmService Factor184TEnclosureNo ProtectionEfficiency40 °CFrequency6.4/3.2 & 7/3.5 APower FactorContinuousInsulation ClassBKVA Code6206Opp Drive End Bearing SizeRecognizedCSAYIP Code

# **Technical Specifications**

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	6	Rotation	Reversible
Resistance Main	5.4 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	т	Overall Length	14.97 in
Frame Length	9.50 in	Shaft Diameter	1.125 in
Shaft Extension	2.81 in	Assembly/Box Mounting	F1/F2 Capable
Outline Drawing	035536-950	Connection Drawing	005010.01ME

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:11/20/2023

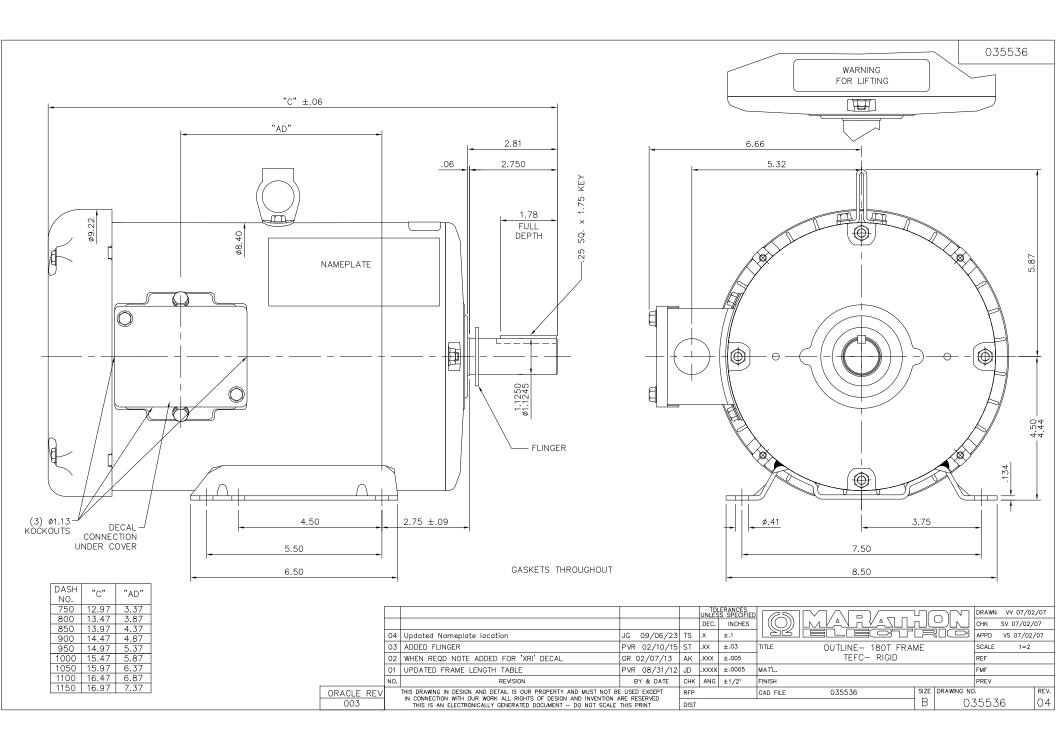

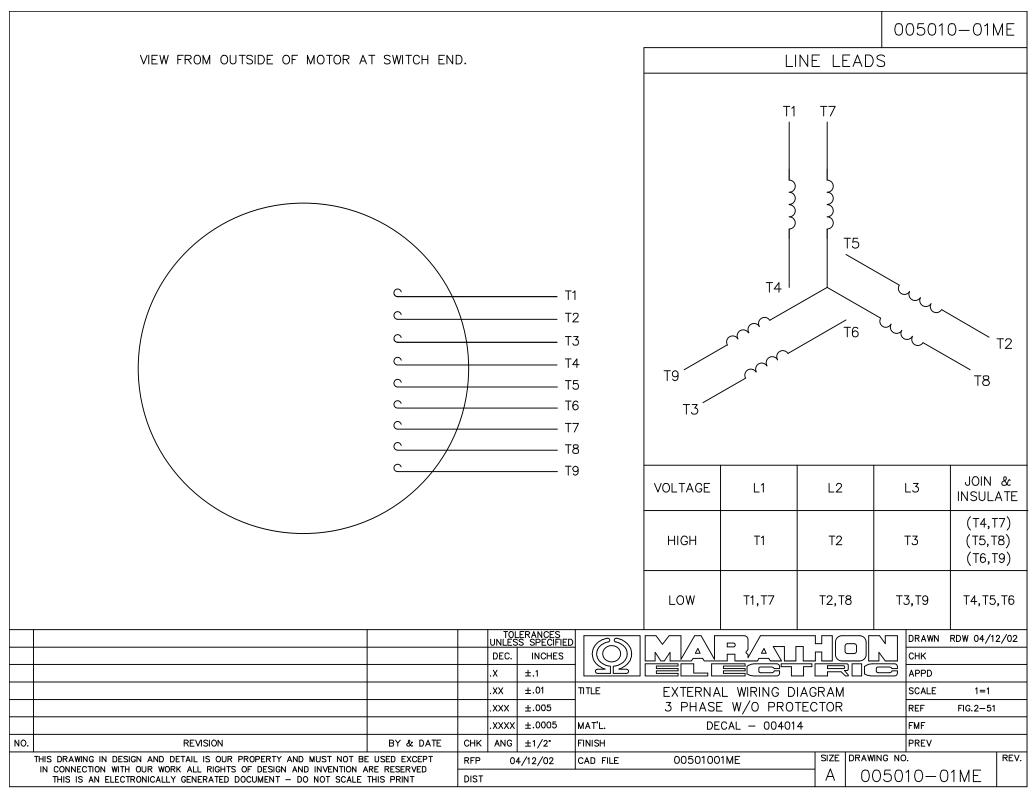

4 of 7

7/20/2012 2:29:41 PM - Converted by Connexus

#### **CERTIFICATION DATA SHEET**

Model#:	184TTFW16076 AA	WINDING#:	T8638 FR 3
CONN. DIAGRAM:	005010.01ME	ASSEMBLY:	F1/F2 CAPABLE
OUTLINE:	035536-950		

## TYPICAL MOTOR PERFORMANCE DATA

HP	ĸw	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
2&1 1/2	1.49&1.12	1200	1175&975	184T	TEFC	К	В

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60/50	230/460#190/	6.4/3.2&7/3.5	ACROSS THE	CONTINUOU	F4	1.15/1.15	40	3300
		380		LINE	S				

FULL LOAD EFF: 88.5&85	3/4 LOAD EFF: 88	1/2 LOAD EFF: 87.1	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 66.5&58	3/4 LOAD PF: 58.9	1/2 LOAD PF: 47.2	0	SQ CAGE IND RUN	3.9 / 1.9

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
9 LB-FT	41 / 20.5	16.8 LB-FT 188	30.2 LB-FT 336	32

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
55 dBA	65 dBA	0 LB-FT^2	0 LB-FT^2	15 SEC.	2	0 LBS.

# \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	т	NONE	NONE	1144	ROLLED STEEL
6206	6205					STRESSPROOF	
0200						(C-223)	

	THERMO-PROTECTORS				CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

#### If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: NONE							
INV. HP SPEED RANGE:	INV. HP SPEED RANGE: NONE						
ENCODER: NONE							
NONE NONE							
NONE NONE PPR							
BRAKE: NONE NO	NE						
NONE P/N NONE							
NONE NONE							
NONE FT-LB NO	NE V NONE Hz						

DATE: 06/21/2017 11:31:01 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

\* Ν 0 Т Е S \*

Г

Uncontrolled Copy

## Uncontrolled Copy

