PRODUCT INFORMATION PACKET

Model No: 193338.60
Catalog No: 193338.60
LEESON® PASSPORT 4 HP, General Purpose Motors, 3 phase, 1200 RPM, 230/460 V, 132S Frame, TEFC

Nameplate Specifications

Phase	3	Output HP	4 & 3 Hp
Output KW	3.0 & 2.2 kW	Voltage	230/460 & 200/400 V
Speed	1182 & 986 rpm	Service Factor	1.15 & 1.15
Frame	132S	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	89.5 & 89.5 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	12.4/6.2 & 11.6/5.8 A	Power Factor	66.5
Duty	Continuous	Insulation Class	F
Design Code	B	KVA Code	J
Drive End Bearing Size	6308	Opp Drive End Bearing Size	6306
UL	Recognized	CSA	Y
CE	Y	IP Code	55
Number of Speeds	1		

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Wye Start Delta Run Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	2.02 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	IEC	Overall Length	18.26 in
Shaft Diameter	1.500 in	Shaft Extension	3.15 in
Assembly/Box Mounting	F3		
Connection Drawing	004172.01	Outline Drawing	B-SS622262

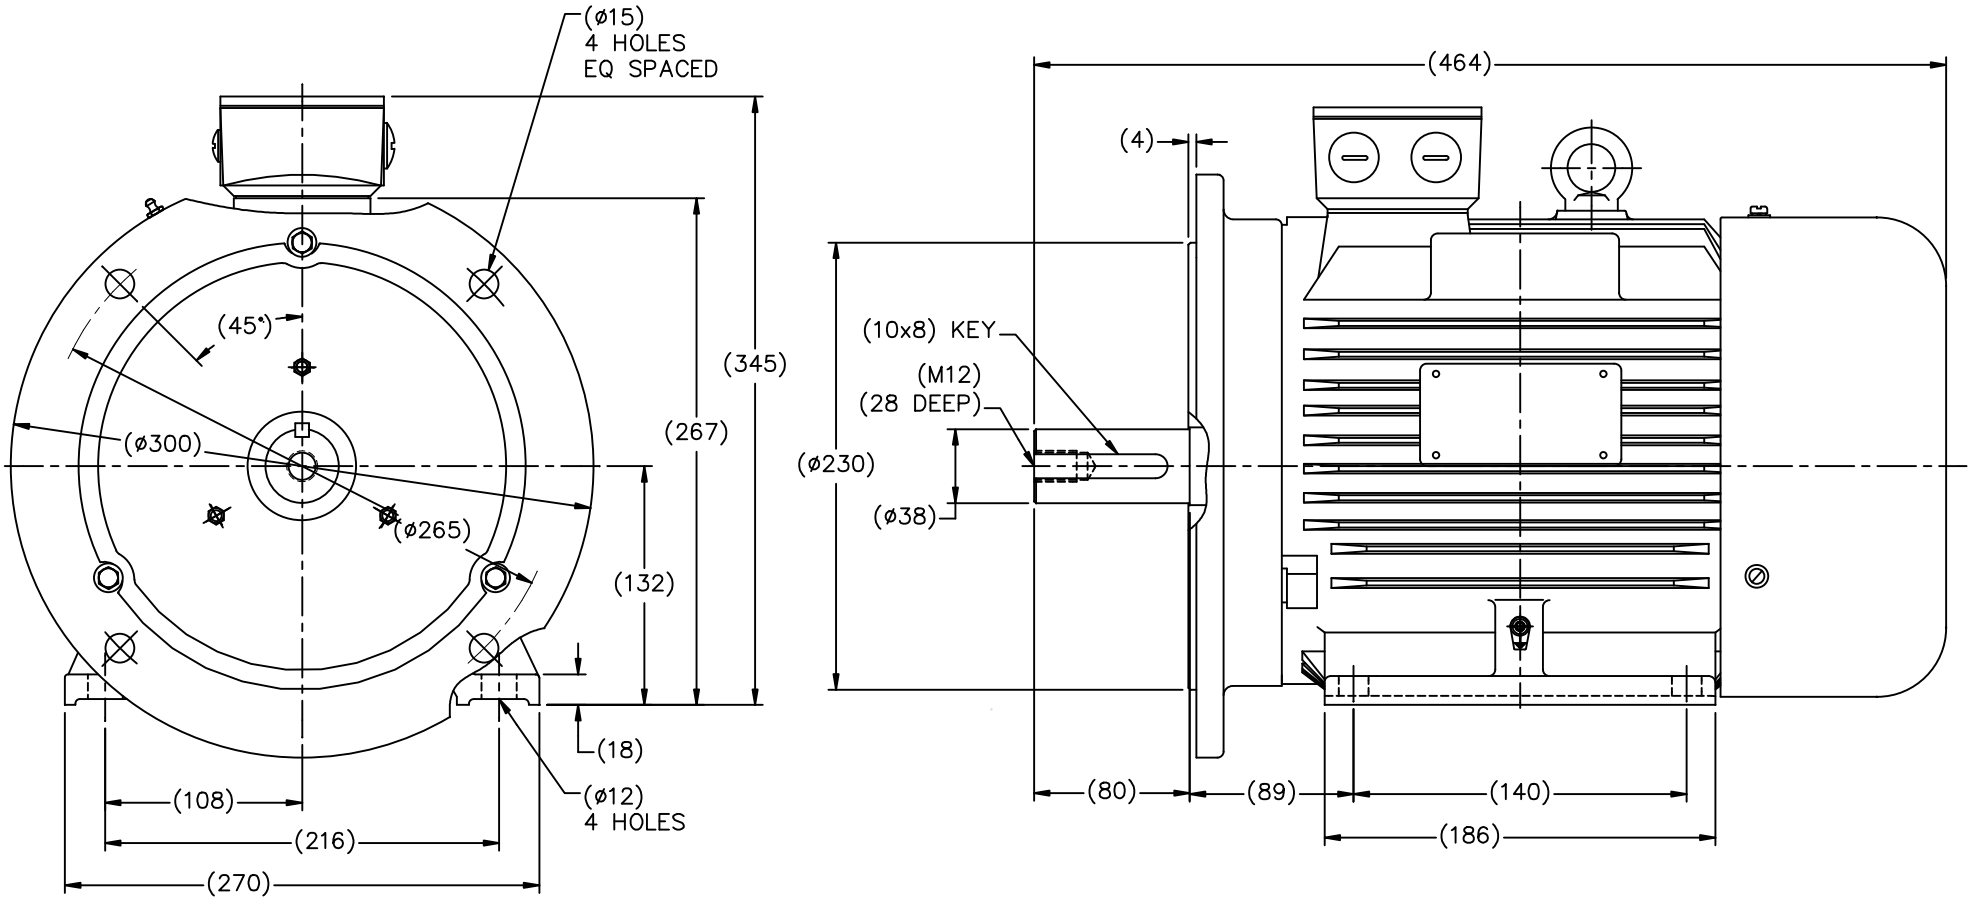

(MAY NOT BE DRAWN TO SCALE) (DIMENSIONS ARE IN MILLIMETERS)

NO.	REVISION	BY & DATE	CHK
			ANG

TOLERANCES UNLESS SPECIFIED	
DEC.	METRIC
.X	±2.5
.XX	±.76
.XXX	±.127
.XXXX	±.0127
ANG	±7'30"

REGAL-BELOIT CORPORATION

TITLE OUTLINE
DF132SD-6R

DRAWN	HLB 12-07-2010
CHK	DJK 12-17-2010
APPD	SB 12-18-2010
SCALE	1=18
REF	193338-60
FMF	HEBEI
MAT'L.	
FINISH	
PREV	

RFP 12-22-2010
DIST
CAD FILE SS622262

SIZE	DRAWING NO.	PAGE OF	REV.
B	SS622262		

WYE – DELTA STARTING USEABLE ON 2,4 AND 6 POLE MOTORS.

LOW VOLTAGE CONNECTION

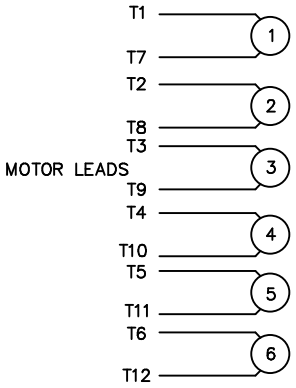

HIGH VOLTAGE CONNECTION

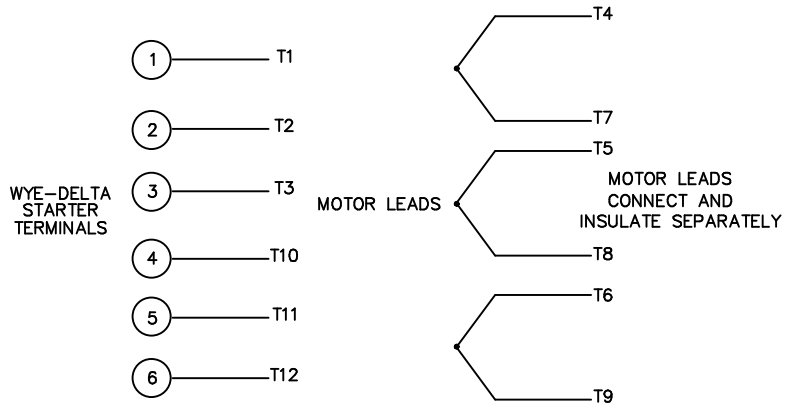

REFER TO THE WYE–DELTA STARTER CONNECTION INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

PART WINDING START USABLE ON 4 & 6 POLE MOTORS
LOW VOLTAGE CONNECTION ONLY

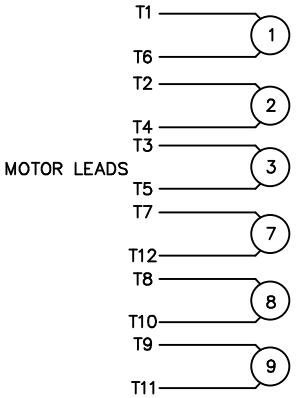

REFER TO THE PART WINDING STARTER INSTRUCTIONS FOR PROPER CONNECTION OF POWER LINES TO STARTER.

REFER TO THE CUTLER – HAMMER OR EQUIV. FOR PROPER SELECTION OF OVERLOAD HEATER COILS.

LINE LEADS

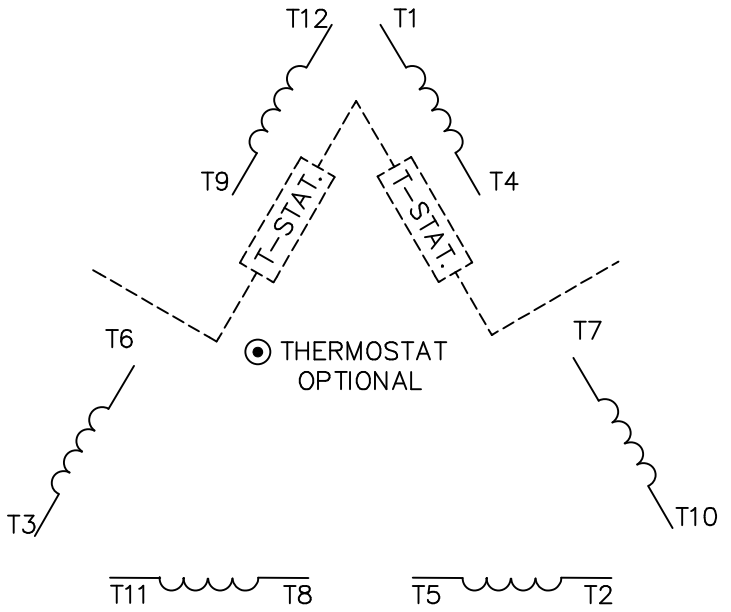

ROTATION CAN BE REVERSED BY INTERCHANGING ANY TWO LINE LEADS

⦿ RED LEADS OR P1, P2, FOR N/C THERMOSTAT

ACROSS THE LINE START & RUN

	LINE 1	LINE 2	LINE 3	JOIN & INSULATE SEPARATELY
HIGH VOLT	T1,T12	T2,T10	T3,T11	(T4,T7) (T5,T8) (T6,T9)
LOW VOLT	T1,T6 T7,T12	T2,T4 T8,T10	T3,T5 T9,T11	

NO.	REVISION	BY & DATE	CHK
03	REV'D LOW VOLTAGE CONN. LEADS PER ELEC.	BJB 06/07/00	
02	ADDED T–STAT. NOTES PER ELECTRICAL	KMM 06/02/98	
01	REDRAWN TO CAD	DBT 06/02/97	

TOLERANCES UNLESS SPECIFIED

DEC.	INCHES
.X	±.1
.XX	±.01
.XXX	±.005
.XXXX	±.0005
ANG	±1/2°

LEESON ELECTRIC MOTORS GEARMOTORS AND DRIVES

TITLE DELTA – WYE CONNECTION DIAGRAM

MAT'L.

FINISH

CAD FILE 00417201

RFP

DIST

DRAWN	WLW 09/08/77
CHK	RPB 09/12/77
APPD	JCW 09/12/77
SCALE	1=1
REF	
FMF	
PREV	

SIZE A | DRAWING NO. 004172–01 | REV. 03

6/28/2007 3:22:15 PM -

LEESON

CERTIFICATION DATA SHEET

1051 CHEYENNE AVE.
GRAFTON, WI 53024
PH. 262-377-8810

CATALOG #: 193338.60

CONN. DIAGRAM: 004172.01
OUTLINE: B-SS622262
WINDING #: T08706008 3

MOUNTING: F3

TYPICAL MOTOR PERFORMANCE DATA

HP	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
4&3	2.98&2.24	1200	1182&986	132	TEFC	J	B

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	AMB°C
3	60/50	230/460&200/400	12.4/6.2&11.6/5.8	Y START D RUN OR INV	CONTINUOUS	F5	1.15/1.15	40

FULL LOAD EFF:	89.5&89.5	3/4 LOAD EFF:	89.5	1/2 LOAD EFF:	87.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	66.5&62	3/4 LOAD PF:	59.5	1/2 LOAD PF:	47.5	85.5	SQ CAGE INV RATED

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
17.9 LB-FT	71 / 35.5	32.5 LB-FT 182 %	57 LB-FT 318 %	30

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS / HOUR	APPROX. MOTOR WGT
54 dBA	64 dBA	- LB-FT^2	- LB-FT^2	- SEC.	-	190 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
FF-FLANGE-265	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE - LEESON (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT MATERIAL	FRAME MATERIAL
DE	ODE						
BALL	BALL	POLYREX EM	STANDARD IEC	NONE	NONE	AISI 1045 (C-240)	CAST IRON
6308	6306						

THERMO-PROTECTORS				THERMISTORS	CONTROL	SPACE HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

*****

N

O

T

E

S

*****

INVERTER TORQUE: CONSTANT 10:1
INV. HP SPEED RANGE: NONE

ENCODER: NONE
NONE NONE
NONE NONE PPR

BRAKE: NONE NONE
NONE P/N NONE
NONE NONE
NONE FT-LB NONE V NONE Hz

Data Sheet

Date: 1/23/2018

193338.60

Data @ 460 V

Motor Load Data

Load	0%	25%	50%	75%	100%	115%	125%	LR	
Current (Amps)	3.6	4.0	4.5	5.5	6.2	7.0	7.2	35.5	
Torque (ft-lb)	0.00	4.4	8.8	13.3	17.9	20.5	22.4	32.5	
RPM	1200	1195	1192	1188	1182	1,180	1178	0	
Efficiency (%)		80.0	87.5	89.5	89.5	89.8	88.5		
P.F. (%)	6.0	29.5	47.5	59.5	66.5	69.0	71.0	40.0	

Motor Speed Data

	LR	Pull-Up	BD	Rated	Idle
Speed (RPM)	0	600	1075	1182	1200
Current (Amps)	35.5	30.0	23.0	6.2	3.6
Torque (ft-lb)	32.5	28.0	57.0	17.9	0.00

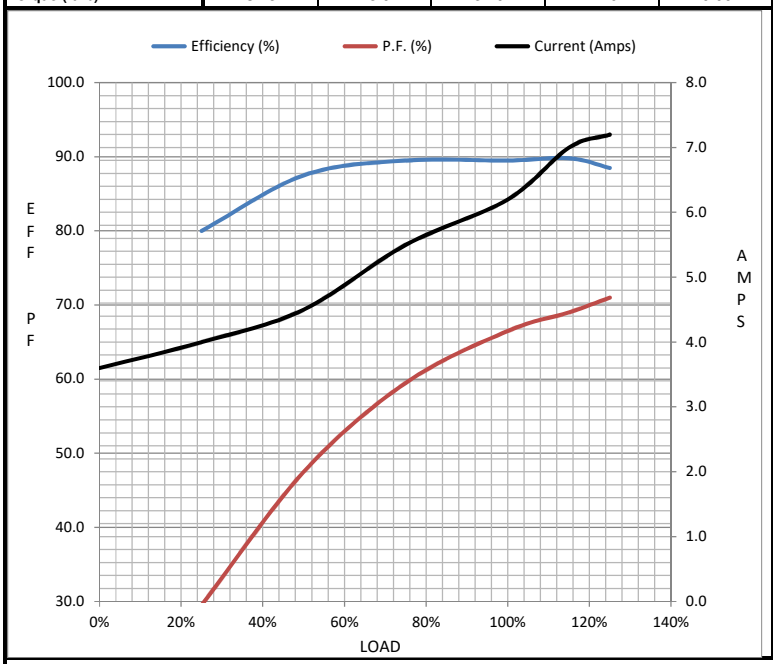

Information Block

HP	4.0	
Sync. RPM	1200	
Frame	112	
Enclosure	TEFC	
Construction	TFC	
Voltage	230/460#200/400	V
Frequency	60	Hz
Design	B	
LR Code letter	J	
Service Factor	1.15	
Temp Rise @ FL	30	° C
Duty	CONT	
Ambient	40	° C
Elevation	1,000	feet
Rotor/Shaft wk²	0.00	Lb-Ft²
Ref Wdg	T08706008 NONE	
Sound Pressure @ 1M	54	dBA
VFD Rating	CONSTANT 10:1	
Outline Dwg	B-SS622262	
Conn. Diag	004172.01	

Additional Specifications:

0

0

EQUIV CKT (OHMS / PHASE)

R1	R2	X1	X2	Xm
0.0000	0.0000	0.0000	0.0000	0.0000

Speed -Torque Curve