## PRODUCT INFORMATION PACKET



Model No: 056T17G5315 Catalog No: G829

Hazardous Duty® Explosion Proof Motor, 0.50 HP, 3 Ph, 60 Hz, 230/460 V, 1800 RPM, 56C Frame, EPFC

Operational at 208-230/460 V @60HZ





Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2023 Regal Rexnord Corporation, All Rights Reserved. MC017097E

Product Information Packet: Model No: 056T17G5315, Catalog No:G829 Hazardous Duty® Explosion Proof Motor, 0.50 HP, 3 Ph, 60 Hz, 230/460 V, 1800 RPM, 56C Frame, EPFC




## Nameplate Specifications

Phase	3	Output HP	0.50 Hp
Output KW	0.37 kW	Voltage	230/460 V
Speed	1725 rpm	Service Factor	1.00
Frame	56C	Enclosure	Explosion Proof Fan cooled
Thermal Protection	Automatic	Efficiency	68 %
Ambient Temperature	40 °C	Frequency	60 Hz
Current	2.4/1.2 A	Power Factor	61.1
Duty	Continuous	Insulation Class	В
Design Code	В	KVA Code	М
Drive End Bearing Size	6203	Opp Drive End Bearing Size	6203
UL	UL Listed And CSA Certified	CSA	Υ
CE	N	IP Code	54
Number of Speeds	1	Hazardous Location	DIV 1 EXP PROOF CL I GR CD CL II GR FG T3B


## **Technical Specifications**

Electrical Type	Squirrel Cage Induction Run	Starting Method	Across The Line
Poles	4	Rotation	Reversible
Resistance Main	40 Ohms	Mounting	Round
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Rolled Steel
Shaft Type	NEMA 56	Overall Length	13.94 in
Frame Length	6.81 in	Shaft Diameter	0.625 in
Shaft Extension	2.06 in	Assembly/Box Mounting	F1 ONLY
Outline Drawing	B-104188-681	Connection Drawing	A-EE7335

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/11/2023

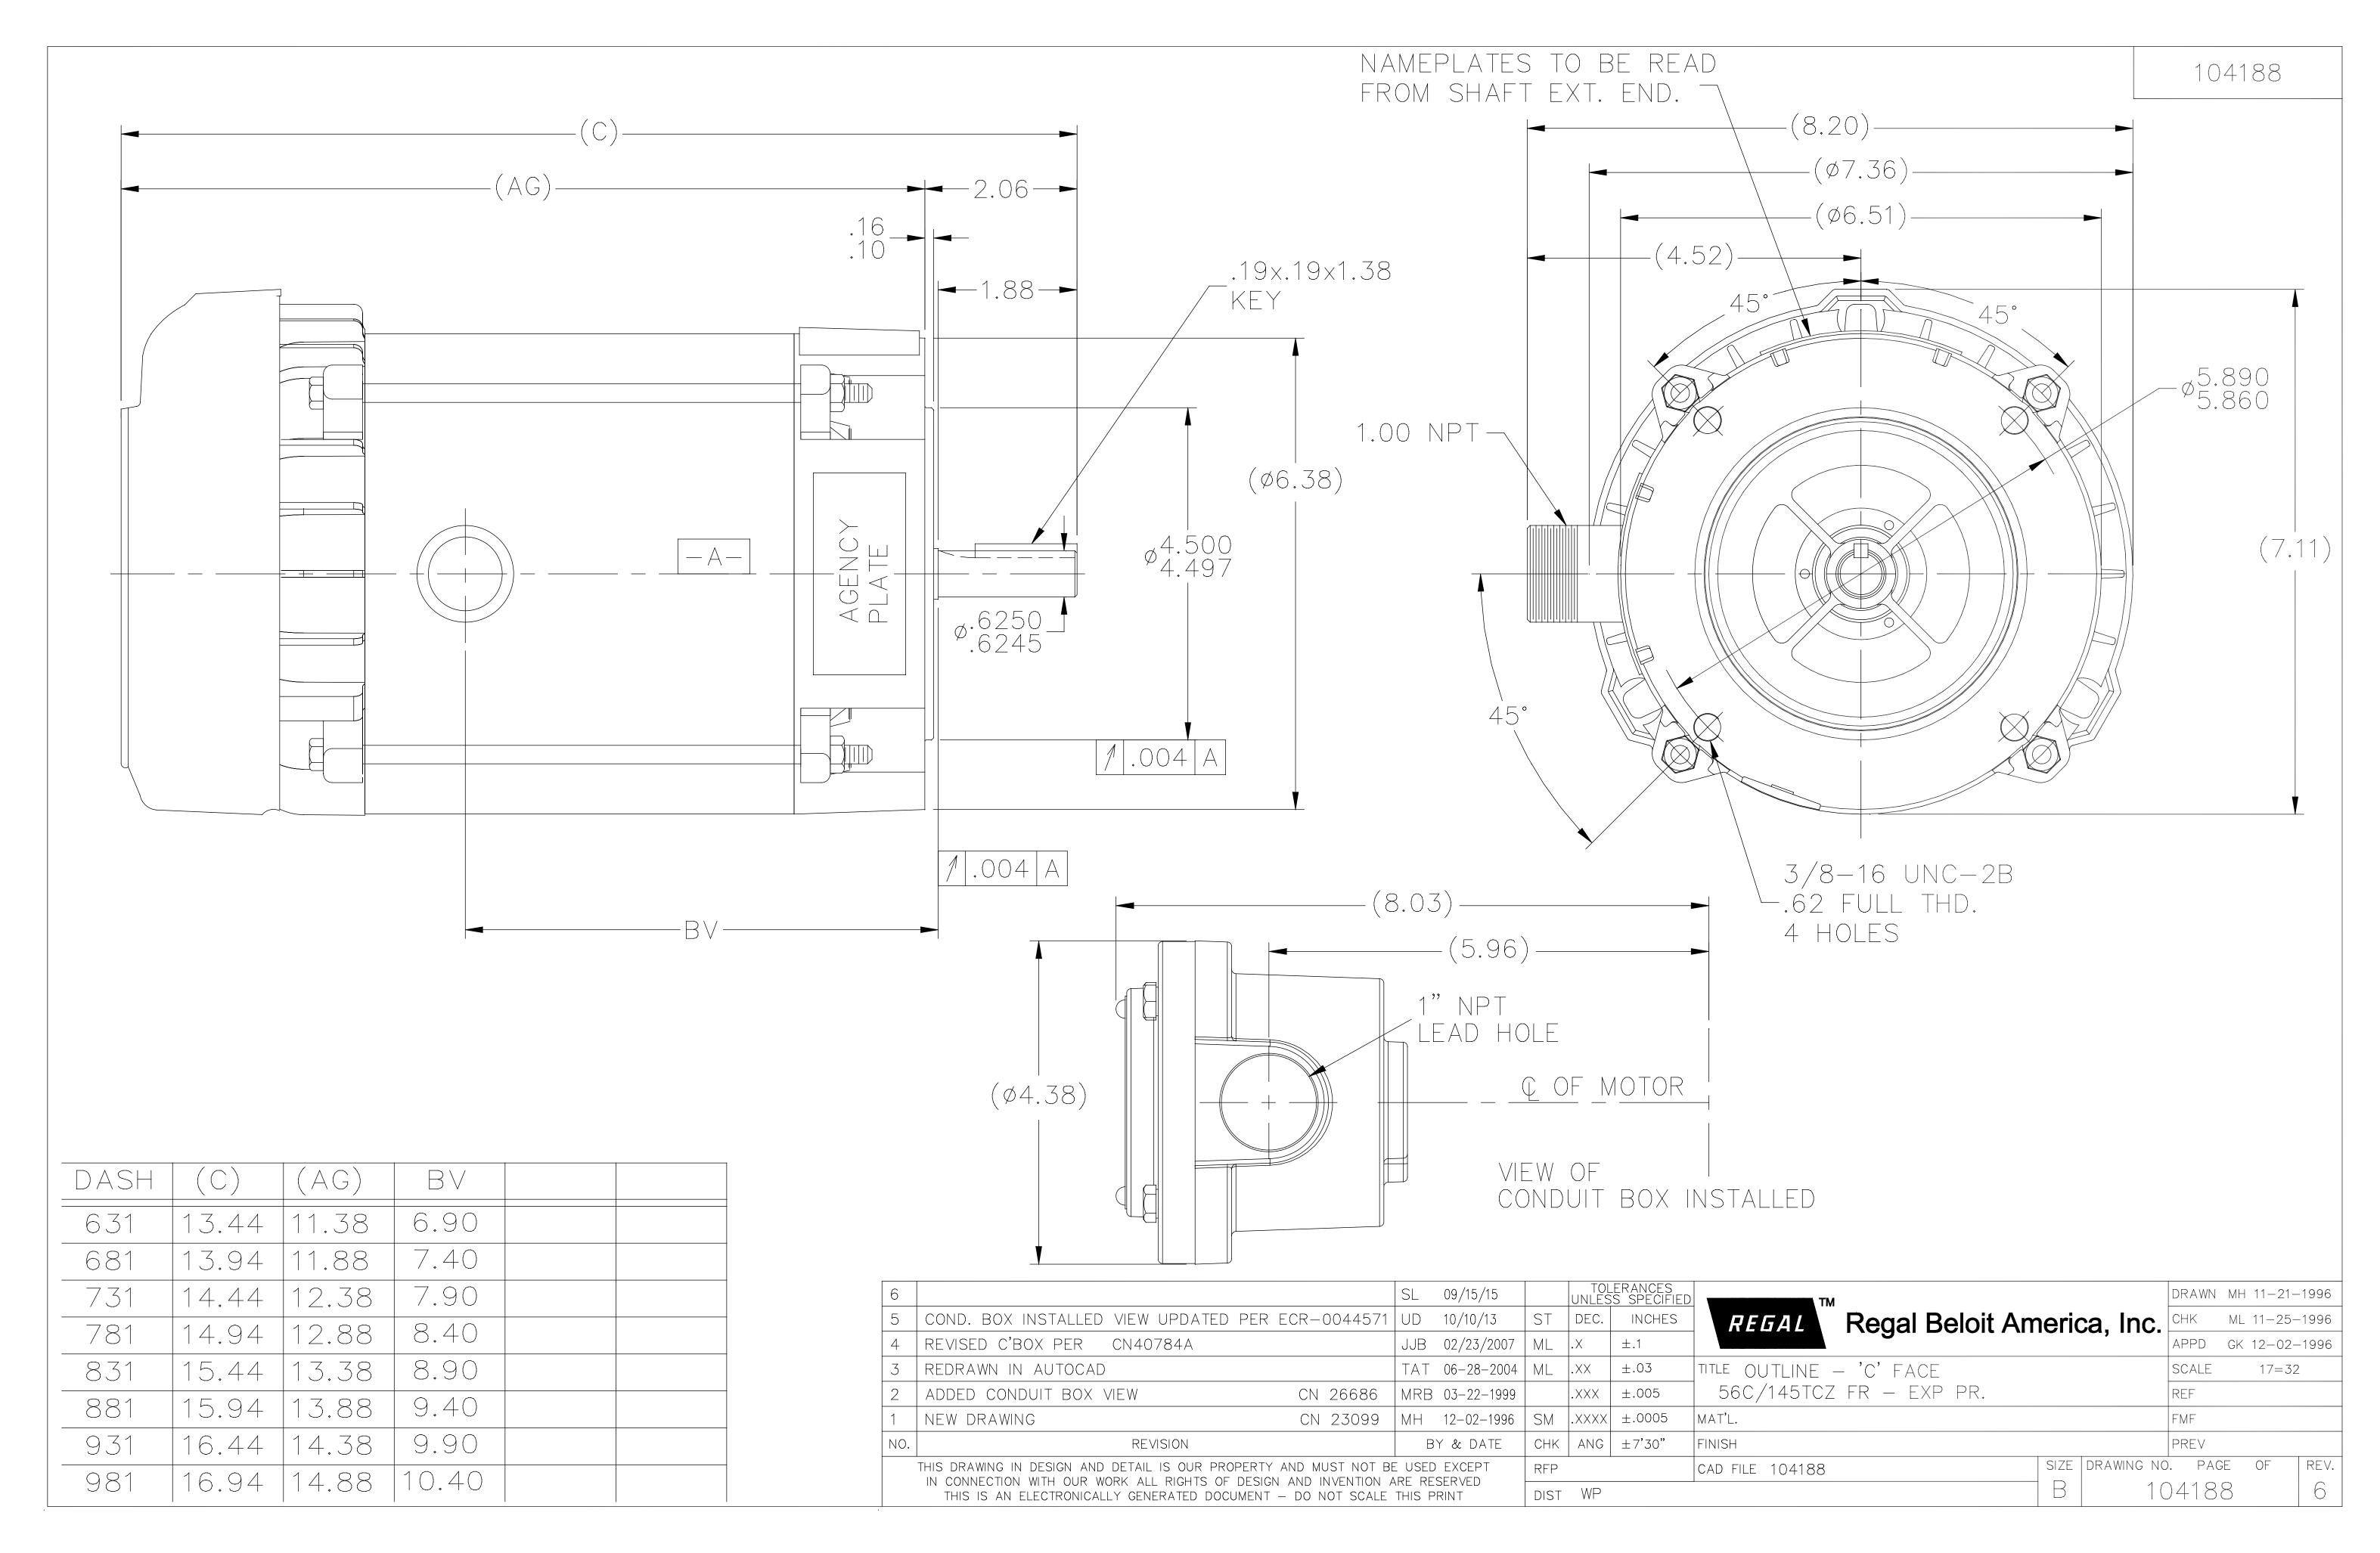

# Uncontrolled Copy

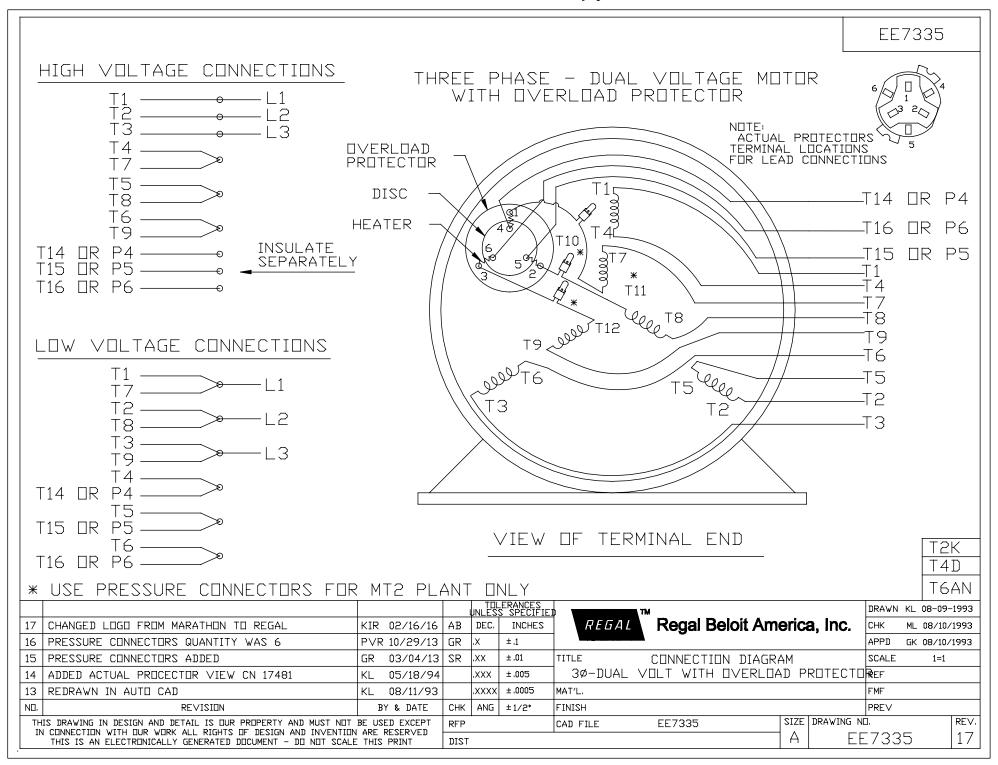

### **CERTIFICATION DATA SHEET**

 Model#:
 56T17G5315 D
 WINDING#:
 ZT408 R8 3

 CONN. DIAGRAM:
 A-EE7335
 ASSEMBLY:
 F1 ONLY

**OUTLINE**: B-104188-681

### **TYPICAL MOTOR PERFORMANCE DATA**

НР	KW	SY	NC. RPM	F.L. RPM	FRAME	ENCLOS	SURE K	/A CODE	DESIGN
1/2	.37		1800	1725	56C	EPF	с	М	В
PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	<b>AMB°C</b>	ELEVATION
3	60	208-230/460	2.3-2.4/1.2	ACROSS THE	CONTINUOU	В3	1.0	40	3300
				LINE	S				

FULL LOAD EFF: 68	3/4 LOAD EFF: 65.5	1/2 LOAD EFF: 63.5	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 61.1	3/4 LOAD PF: 48.5	1/2 LOAD PF: 38	64	SQ CAGE IND RUN	1.8 / .9

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
1.5 LB-FT	14 / 7	6.2 LB-FT 413	7.2 LB-FT 480	45

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
62 dBA	72 dBA	0.05 LB-FT^2	3 LB-FT^2	15 SEC.	2	25 LBS.

### \*\*\* SUPPLEMENTAL INFORMATION \*\*\*

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
C-FACE	STANDARD	ROUND	HORIZONTAL	FALSE	EXP PROOF CL	FALSE	NONE	GRAY
					I GR C&D CL II			(POWDER)
					GR F&G T3B			

BEARINGS		GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	Т	NONE	NONE	1144	ROLLED STEEL
6203	6203					STRESSPROOF	
0200	5200					(C-223)	

THERMO-PROTECTORS				THERMISTORS	CONTROL	SPACE /n HEATERS
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	AUTOMATIC	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: NONE INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR

BRAKE: NONE NONE NONE P/N NONE NONE NONE

NONE FT-LB NONE V NONE Hz

\*
N
O
T
E
S

DATE: 06/29/2017 12:59:59 AM FORM 3531 REV.3 02/07/99 \*\* Subject to change without notice.

