PRODUCT INFORMATION PACKET



Model No: 444TTDCD6060 Catalog No: GT0052A

Globetrotter® General Purpose Motor, 150 & 125 HP, 3 Ph, 60 & 50 Hz, 460 & 380 V, 1800 & 1500 RPM,

444T Frame, DP



Regal and Marathon are trademarks of Regal Rexnord Corporation or one of its affiliated companies.

©2024 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: 444TTDCD6060, Catalog No:GT0052A Globetrotter® General Purpose Motor, 150 & 125 HP, 3 Ph, 60 & 50 Hz, 460 & 380 V, 1800 & 1500 RPM, 444T Frame, DP




Nameplate Specifications

Phase	3	Output HP	150 & 125 Hp	
Output KW	112.0 & 93.0 kW	Voltage	460 & 380 V	
Speed	1790 & 1490 rpm	Service Factor	1.15 & 1.15	
Frame	444T	Enclosure	Drip Proof	
Thermal Protection	No Protection	Efficiency	95.8 & 95.8 %	
Ambient Temperature	40 °C	Frequency	60 & 50 Hz	
Current	168 & 170 A	Power Factor	87	
Duty	Continuous	Insulation Class	F	
Design Code	В	KVA Code	G	
Drive End Bearing Size	6319	Opp Drive End Bearing Size	6317	
UL	Recognized	CSA	Υ	
CE	Υ	IP Code	22	
Number of Speeds	1			

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Part Wdg Start Or Inverter
Poles	4	Rotation	Reversible
Resistance Main	.028 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Overall Length	44.57 in
Shaft Diameter	3.375 in	Shaft Extension	8.5 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	VARIABLE 10:1
Outline Drawing	SS620758-100	Connection Drawing	EE7341C

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/18/2024

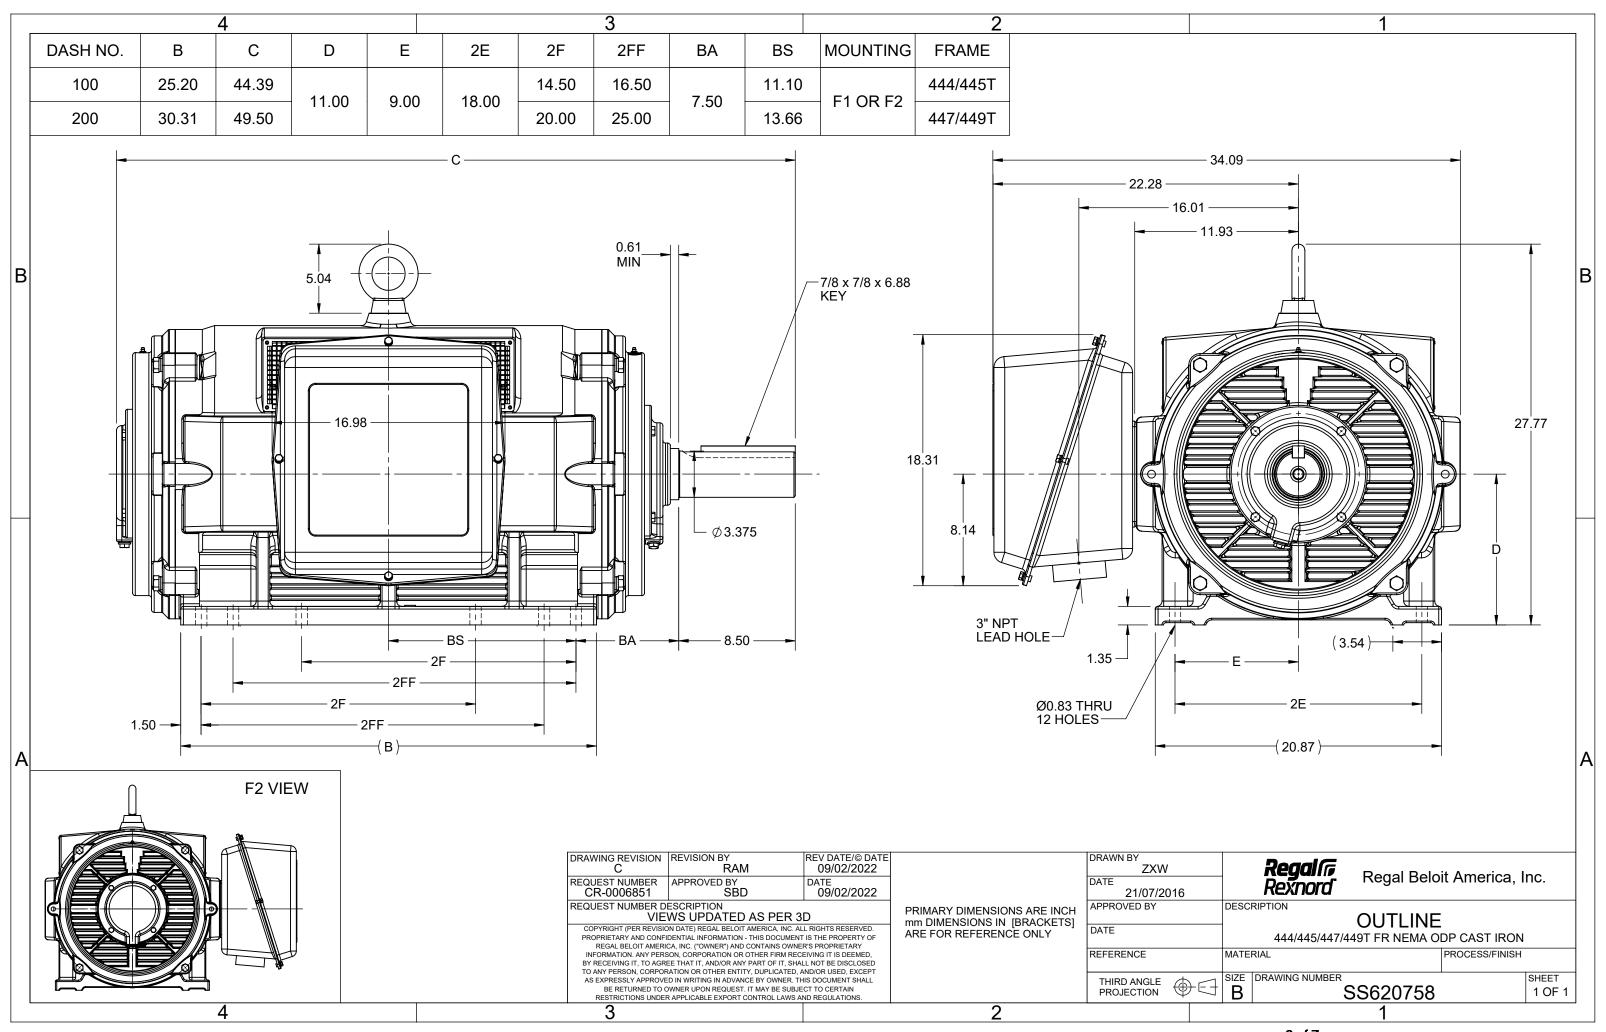

EE7341C

START

CONNECT T1 TO LINE 1
CONNECT T2 TO LINE 2
CONNECT T3 TO LINE 3
T7-T8-T9 OPEN

RUN

CONNECT T1&T7 TO LINE 1 CONNECT T2&T8 TO LINE 2 CONNECT T3&T9 TO LINE 3


IF MOTOR HAS 2 T'S

START

CONNECT T1,T1 TO LINE 1 CONNECT T2,T2 TO LINE 2 CONNECT T3,T3 TO LINE 3 T7,T7-T8,T8-T9,T9 OPEN

RUN

CONNECT T1,T1&T7,T7 TO LINE 1 CONNECT T2,T2&T8,T8 TO LINE 2 CONNECT T3,T3&T9,T9 TO LINE 3

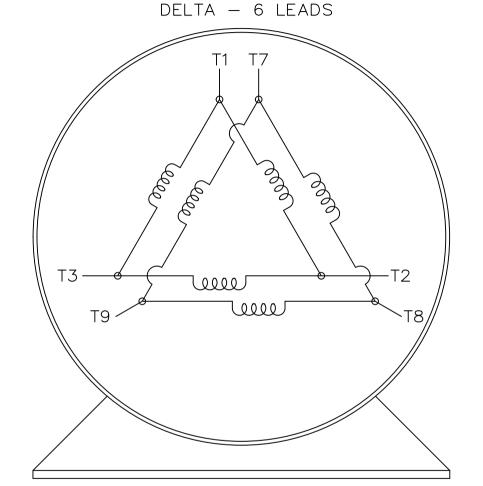

THREE PHASE - PART WINDING START

VIEW OF TERMINAL END

				TOL UNLES	ERAN S SP	ICES ECIFIED				DRAWN BLR	03-09-1998
				DEC.	IN	CHES	REGAL	REGAL - BELOIT CO	DRPORATION	CHK ML	03-23-1998
				.x	±	-				APPD GK	03-23-1998
				.xx	±	-	TITLE C	ONNECTION DIAGRA	AM	SCALE	1=1
Ε	NOTE ADDED FOR 2 T'S	NAR 17-12-2020	RC	.xxx	±	-		3ø − 6 LEADS		REF	
D	RE-DRAWN WITH REGAL LOGO ECO-0110493	WGJ 09-30-2016	ЕМН	.xxxx	±	-	MAT'L.			FMF	
NO.	REVISION	BY & DATE	снк	ANG	±	-	FINISH			PREV	
	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE THIS PRINT						CAD FILE EE7341C		SIZE DRAWING N		OF REV.
					DIST					E7341C	E

CERTIFICATION DATA SHEET

444TTDCD6060 AA WINDING#: Model#: HE32804017 NONE 1 CONN. DIAGRAM: EE7341C ASSEMBLY: F1/F2 CAPABLE

OUTLINE: SS620758

TYPICAL MOTOR PERFORMANCE DATA

HP	KW	<i>I</i>	SYN	IC. RPM	F.L. RPM	FRAME		ENCLOS	URE	KV	A CODE	DESIGN
150&125	112&	93	1	1800	1790&1490	444T		DP			G	В
PH	Hz	VOL	TS	FL AMPS	START TYPE	DUTY		INSL	S.	F	AMB°C	ELEVATION
							1					

PH	Hz	VOLTS	FL AMPS	START TYPE	DUTY	INSL	S.F	AMB°C	ELEVATION
3	60/50	460#380	168&170	PWS OR	CONTINUOU	F7	1.15/1.15	40	3300
				INVERTER	S				

FULL LOAD EFF: 95.8&95.8	3/4 LOAD EFF: 95.8	1/2 LOAD EFF: 95	GTD. EFF	ELEC. TYPE	NO LOAD AMPS
FULL LOAD PF: 87&87	3/4 LOAD PF: 85	1/2 LOAD PF: 78	95.4	SQ CAGE INV RATED	51

F.L. TORQUE	LOCKED ROTOR AMPS	L.R. TORQUE	B.D. TORQUE	F.L. RISE°C
440 LB-FT	1070	880 LB-FT 200	1056 LB-FT 240	40

SOUND PRESSURE @ 3 FT.	SOUND POWER	ROTOR WK^2	MAX. WK^2	SAFE STALL TIME	STARTS /HOUR	APPROX. MOTOR WGT
84 dBA	94 dBA	58 LB-FT^2	750 LB-FT^2	20 SEC.	2	1700 LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	NONE	FALSE	NONE	BLUE (ENAMEL)

BEARINGS		GREASE	SHAFT TYPE SPECIAL DE		SPECIAL ODE	SHAFT	FRAME
DE	OPE					MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	Т	NONE	NONE	1045 HOT	CAST IRON
6319	6317					ROLLED (C-204)	

	THERMO-PF	ROTECTORS	THERMISTORS	CONTROL	SPACE /n HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs			
NONE	NOT	NONE	NONE	NONE	FALSE	NONE VOLTS

If Inverter equals NONE, contact factory for further information

INVERTER TORQUE: VARIABLE 10:1 INV. HP SPEED RANGE: NONE

ENCODER: NONE NONE NONE NONE NONE PPR


BRAKE: NONE NONE NONE P/N NONE NONE NONE


NONE FT-LB NONE V NONE Hz

Ν 0 Т Ε S

> DATE: 07/03/2017 02:25:18 AM FORM 3531 REV.3 02/07/99

^{**} Subject to change without notice.

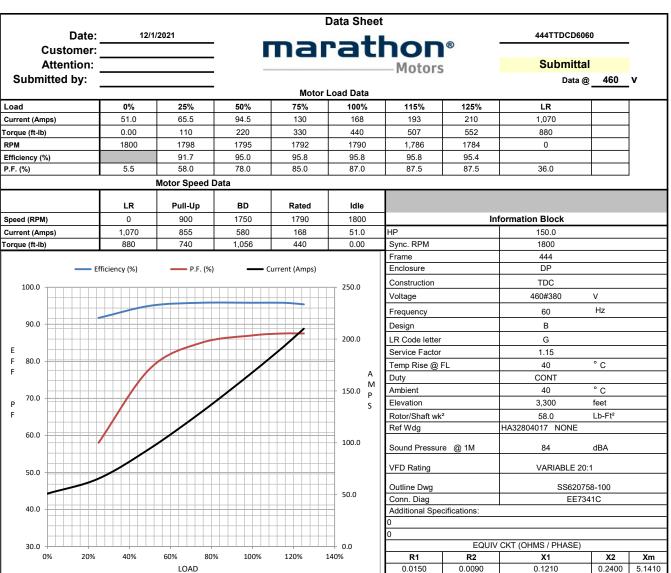

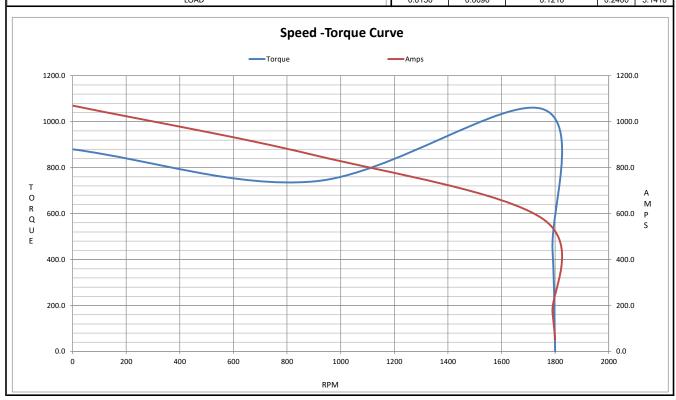



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401 and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 444TTDCD6060

(Model No. may contain prefix and/or suffix characters)

Catalog No: GT0052A

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

Authorized Representative in the Community:

J. cerse

Julian Clark Marketing Engineer