PRODUCT INFORMATION PACKET




Model No: 445TTFCD6086 Catalog No: GT1050A

Globetrotter® General Purpose Motor, 125 & 100 HP, 3 Ph, 60 & 50 Hz, 460 & 380 V, 1200 & 1000 RPM,

445T Frame, TEFC







Product Information Packet: Model No: 445TTFCD6086, Catalog No:GT1050A Globetrotter® General Purpose Motor, 125 & 100 HP, 3 Ph, 60 & 50 Hz, 460 & 380 V, 1200 & 1000 RPM, 445T Frame, TEFC




Nameplate Specifications

Phase	3	Output HP	125 & 100 Hp
Output KW	93.0 & 75.0 kW	Voltage	460 & 380 V
Speed	1190 & 990 rpm	Service Factor	1.15 & 1.15
Frame	445T	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	No Protection	Efficiency	95 & 95 %
Ambient Temperature	40 °C	Frequency	60 & 50 Hz
Current	143 & 139 A	Power Factor	86
Duty	Continuous	Insulation Class	F
Design Code	В	KVA Code	G
Drive End Bearing Size	6319	Opp Drive End Bearing Size	6317
UL	Listed	CSA	Υ
CE	Υ	IP Code	55
Number of Speeds	1	Hazardous Location	DIVISION 2 T2B

Technical Specifications

Electrical Type	Squirrel Cage Inverter Rated	Starting Method	Part Wdg Start Or Inverter
Poles	6	Rotation	Reversible
Resistance Main	.0353 Ohms	Mounting	Rigid Base
Motor Orientation	Horizontal	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Т	Overall Length	46.71 in
Shaft Diameter	3.375 in	Shaft Extension	8.5 in
Assembly/Box Mounting	F1/F2 CAPABLE	Inverter Load	CONSTANT 2:1/VARIABLE 10:1
Outline Drawing	SS557009	Connection Drawing	EE7341C

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/18/2024

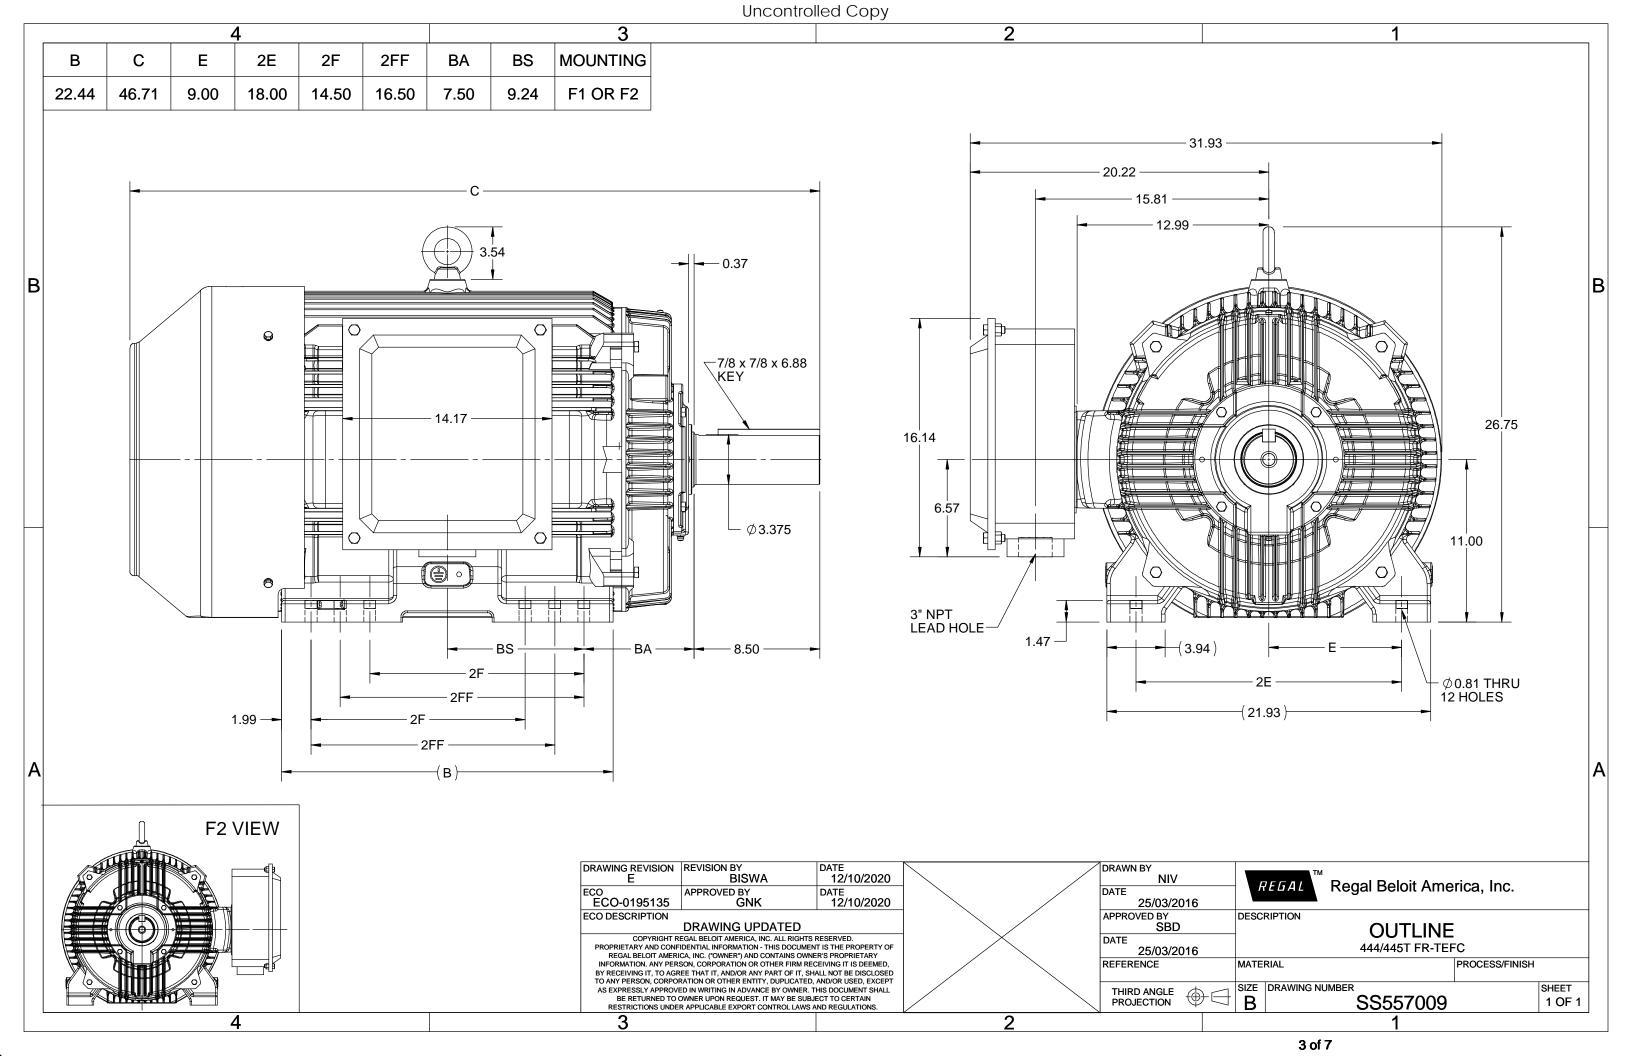

EE7341C

START

CONNECT T1 TO LINE 1
CONNECT T2 TO LINE 2
CONNECT T3 TO LINE 3
T7-T8-T9 OPEN

RUN

CONNECT T1&T7 TO LINE 1 CONNECT T2&T8 TO LINE 2 CONNECT T3&T9 TO LINE 3


IF MOTOR HAS 2 T'S

START

CONNECT T1,T1 TO LINE 1 CONNECT T2,T2 TO LINE 2 CONNECT T3,T3 TO LINE 3 T7,T7-T8,T8-T9,T9 OPEN

RUN

CONNECT T1,T1&T7,T7 TO LINE 1 CONNECT T2,T2&T8,T8 TO LINE 2 CONNECT T3,T3&T9,T9 TO LINE 3

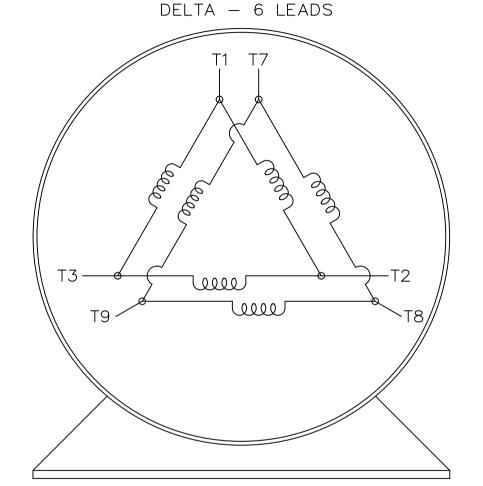

THREE PHASE - PART WINDING START

VIEW OF TERMINAL END

				TOL UNLES	ERAN S SP	ICES ECIFIED				DRAWN BLR	03-09-1998
				DEC.	IN	CHES	REGAL	REGAL - BELOIT CO	DRPORATION	CHK ML	03-23-1998
				.x	±	-				APPD GK	03-23-1998
				.xx	±	-	TITLE C	ONNECTION DIAGRA	AM	SCALE	1=1
Ε	NOTE ADDED FOR 2 T'S	NAR 17-12-2020	RC	.xxx	±	-		3ø − 6 LEADS			
D	RE-DRAWN WITH REGAL LOGO ECO-0110493	WGJ 09-30-2016	ЕМН	.xxxx	±	-	MAT'L.			FMF	
NO.	REVISION	BY & DATE	снк	ANG	±	-	FINISH			PREV	
	THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED						CAD FILE EE7341C		SIZE DRAWING N		OF REV.
	THIS IS AN ELECTRONICALLY GENERATED DOCUMENT — DO NOT SCALE	DIST						A E	E7341C	E	



P.O. BOX 8003 **WAUSAU, WI 54401-8003** PH. 715-675-3311

AΑ

CERTIFICATION DATA SHEET

CUSTOMER:

CUSTOMER PO#:

ORDER #:

MODEL #: 445TTFCD6086

CUSTOMER PART

CONN. DIAGRAM: EE7341C

#:

OUTLINE: SS557009

MOUNTING: F1/F2 CAPABLE

WINDING #: HE32806006 1

TYPICAL MOTOR PERFORMANCE DATA

НР	kW	SYNC. RPM	F.L. RPM	FRAME	ENCLOSURE	KVA CODE	DESIGN
125&100	93.0&75.0	1200	1190&990	445T	TEFC	G	В

PH	Hz	VOLTS	AMPS	START TYPE	DUTY	INSL	S.F.	амв°С
3	60/50	460&380	143&139	PWS OR INVERTER	CONTINUOUS	F7	1.15/1.15	40

FULL LOAD EFF:	95&95	3/4 LOAD EFF:	95	1/2 LOAD EFF:	94.5	GTD. EFF	ELEC. TYPE
FULL LOAD PF:	86&86	3/4 LOAD PF:	83.5	1/2 LOAD PF:	76.5	94.5	SQ CAGE INV RATED

F.L. TORQUE		LOCKED ROTOR AMPS		L.R. TORÇ	UE	E	F.L. RISE°C		
552	LB-FT	907	992	LB-FT	180 %	1410	LB-FT	255 %	55

SOUND PRESSURE @ 3 FT.	SOUND	POWER	ROTO	R WK^2	MA	X. WK^2	SAFE ST	ALL TIME	STARTS / HOUR	APPR MOTOR	
75 dBA	85	dBA	108	LB-FT^2	-	LB-FT^2	25	SEC.	1	1962	LBS.

*** SUPPLEMENTAL INFORMATION ***

DE BRACKET TYPE	ODE BRACKET TYPE	MOUNT TYPE	ORIENTATION	SEVERE DUTY	HAZARDOUS LOCATION	DRIP COVER	SCREENS	PAINT
STANDARD	STANDARD	RIGID	HORIZONTAL	FALSE	DIVISION 2 T2B	FALSE	NONE	BLUE (EPOXY)

BEAR	BEARINGS		CHAFT TYPE	SPECIAL DE SPECIAL ODE		SHAFT	FRAME
DE	ODE	GREASE	SHAFT TYPE	SPECIAL DE	SPECIAL ODE	MATERIAL	MATERIAL
BALL	BALL	POLYREX EM	т	NONE	NONE	104E HOT DOLLED (C 204)	CAST IRON
6319	6317	POLTREX EM	'	NONE	NONE	1045 HOT ROLLED (C-204)	CASTIRON

	THERMO-PROTE	CTORS		THERMISTORS	CONTROL	SPACE HEATERS	
THERMOSTATS	PROTECTORS	WDG RTDs	BRG RTDs	THERMISTORS	CONTROL		
NONE	NOT	NONE	NONE	NONE	FALSE	NONE	VOLTS

Ν

INV. HP SPEED RANGE: NONE

INVERTER TORQUE: VARIABLE 10:1

0

ENCODER: NONE NONE NONE NONE NONE

Т

BRAKE: NONE NONE P/N NONE NONE NONE NONE

Ε


NONE FT-LB NONE NONE Hz

PPR

S

PREPARED BY: Anusha Muthyala

DATE: 09/24/2019 01:44:58 AM FORM 3531 REV.3 02/07/99 ** Subject to change without notice.

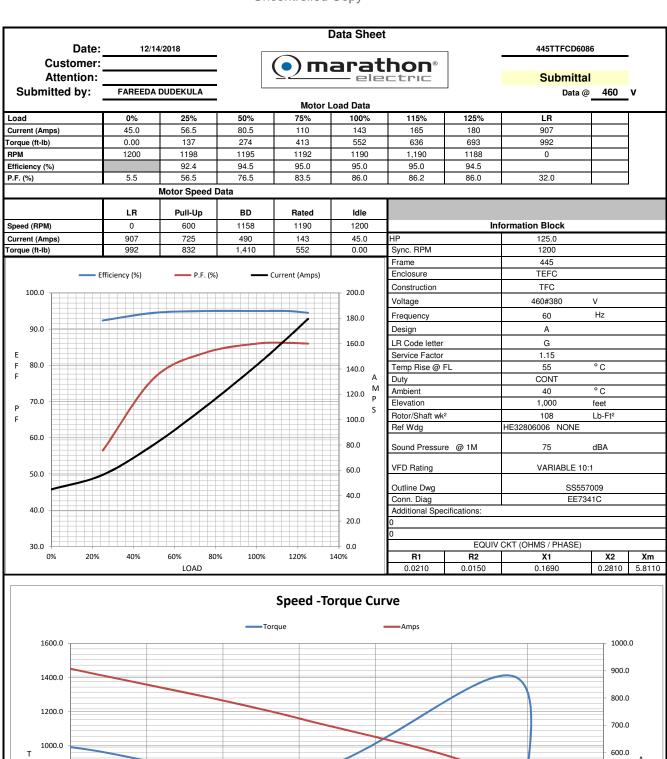



EC Declaration of Conformity

The undersigned representing the manufacturer:

Regal Beloit America 100 East Randolph St. Wausau, WI 54401

and the authorized representative established within the Community:

Marathon Electric UK 6F Thistleton Road Ind. Estate Market Overton Oakham, Rutland LE15 7PP UK

are committed to providing customers with products that comply with applicable regulations and international protocols to which they are subject, including the requirements of the European Parliament Directive on the Harmonization of the laws relating to electrical equipment designed for use within certain voltage limits (2014/35/EU).

Regal Beloit America declares that the following product(s), to which this declaration relates, are in conformity with the relevant sections of the EC standards listed below.

This statement supersedes any statements previously issued pertaining to the product(s) listed below and is subject to change without notice.

Model No: 445TTFCD6086

(Model No. may contain prefix and/or suffix characters)

Catalog No : GT1050A

Rework No: N/A

Directives:

Low Voltage Directive 2014/35/EU

Harmonized Standards Used:

EN 60034-1: 2010 (IEC 60034-1: 2010)

Michael A Logsdon

EN 60034-5: 2001/A1:2007 (IEC 60034-5: 2000/A1:2006)

Authorized Representative:

J. cerse

Authorized Representative in the Community:

Michael A. Logsdon Vice President, Technology

Created on 09/01/2022

Julian Clark Marketing Engineer

C€ 22