PRODUCT INFORMATION PACKET



Model No: CPE13 Catalog No: CPE13 1 HP Close-Coupled Pump Motor, 3 phase, 3600 RPM, 208-230/460 V, 143JP Frame, TEFC Close-Coupled Pump Motors



Regal and Century are trademarks of Regal Rexnord Corporation or one of its affiliated companies. ©2021 Regal Rexnord Corporation, All Rights Reserved. MC017097E



Product Information Packet: Model No: CPE13, Catalog No:CPE13 1 HP Close-Coupled Pump Motor, 3 phase, 3600 RPM, 208-230/460 V, 143JP Frame, TEFC




Nameplate Specifications


Output HP	1 Hp	Output KW	0.75 kW
Frequency	60 Hz	Voltage	208-230/460 V
Current	2.9-2.6/1.3 A	Speed	3475 rpm
Service Factor	1.15	Phase	3
Duty	Continuous	Insulation Class	F
Frame	143JP	Enclosure	Totally Enclosed Fan Cooled
Thermal Protection	None	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
Number of Speeds	1		

Technical Specifications

Electrical Type	POLYPHASE	Starting Method	Across The Line
Poles	2	Rotation	Reversible
Mounting	Rigid Base	Drive End Bearing	Ball
Opp Drive End Bearing	Ball	Frame Material	Cast Iron
Shaft Type	Keyed	Overall Length	18.70 in
Frame Length	5.75 in	Shaft Diameter	1.156 in
Shaft Extension	7.31 in		
Outline Drawing	SS620616	Connection Drawing	A-EE7308

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:10/07/2021

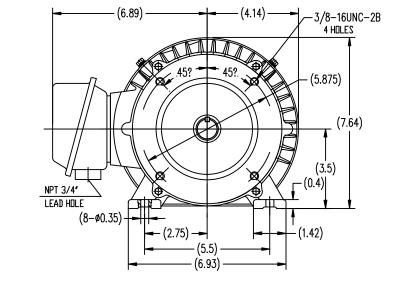

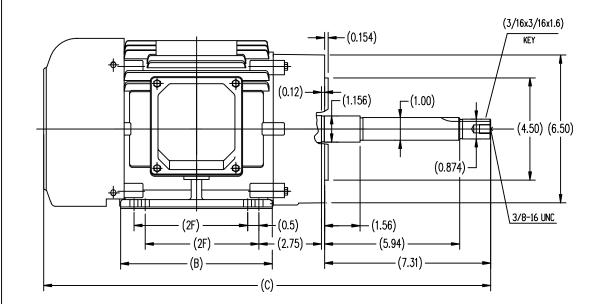

				TOL	ERANCES S SPECIFIED						DRAWN	WY 7-28-2	2012
				DEC.			REGAL	REGAL-BELOIT CORPORA	TION		снк		
				.x.	±.1						APPD		
				.xx	±.03	TITLE		OUTLINE			SCALE		
				.xxx	±.005		143/145J	P FR TEFC-CAST	IRO	N	ref		
				.xxxx	±.0005	MAT [*] L.					FMF	HWADA	
NO.	REVISION	BY & DATE	СНК	ANG	±1/2?	FINISH					PREV		
THIS DRAWING IN DESIGN AND DETAIL IS OUR PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH OUR WORK ALL RIGHTS OF DESIGN AND INVENTION ARE RESERVED		RFP			CAD FILE	SS62	20616	_	DRAWING NO			REV.	
	THIS IS AN ELECTRONICALLY GENERATED DOCUMENT - DO NOT SCALE THIS P		DIST						В	SS6	52061	16	

3 of 4

143T	18.7	5.71	4
145T	19.7	6.69	5
FRAME	С	В	2F

Uncontrolled Copy

